



PROFESSIONAL



KATALOG **CLEANING** **DIVISION** CATALOGUE

Generalni distributer za Srbiju: ECO Steam



PROFESSIONAL

Engineered for **DURABILITY**
and designed to meet
the rigorous demands of
HEAVY-DUTY USE.

*Projektovani da **TRAJU** i
osmišljeni da ispune
stroge zahteve
INTENZIVNE UPOTREBE.*

AR PROFESSIONAL, the new range of pressure washers designed for professionals. This new line was created to offer high performance and absolute reliability, even under the toughest working conditions. The AR PROFESSIONAL range — which includes cold water high pressure washers, petrol engine high pressure washers, and hot water high pressure washers — is specifically designed to meet the needs of professionals operating in high-intensity environments, where the quality of results and operational continuity cannot be compromised. The applications are multiple, spanning from construction to craftsmanship, from the automotive sector to car washing, and extending to the agricultural and food industries, where hygiene and precision are essential requirements. Every product in the AR PROFESSIONAL line is engineered to integrate seamlessly into a variety of working environments, ensuring versatility and consistently high performance over time.

AR PROFESSIONAL, nova linija peraća pod pritiskom namenjena profesionalcima. Ova linija je nastala da pruži visoke performanse i apsolutnu pouzdanost čak i u najtežim uslovima rada. Linija AR PROFESSIONAL, koja obuhvata peraće sa hladnom vodom, peraće sa benzinskim motorom i peraće sa toplom vodom, osmišljena je da precizno odgovori na potrebe profesionalaca koji rade u zahtevnim uslovima, gde se kvalitet rezultata i kontinuitet rada ne smeju dovesti u pitanje. Primene su brojne: od građevinarstva i zanatstva, preko automobilske industrije i auto-perionice, do poljoprivrede i prehrambene industrije, gde su higijena i preciznost neophodni. Svaki proizvod linije AR PROFESSIONAL projektovan je da se efikasno uklapi u različita radna okruženja, uz svestranost i postojane performanse tokom vremena.

**ECO Steam je generalni distributer
AR Professional serije u Srbiji.**



Discover more on
www.ar-professional.it

*/ Saznajte više na
www.ar-professional.it*



AR1-8.17CM str. 08
AR1-10.19CMH str. 08



AR2-8.16CMK str. 10



AR2-10.15CM str. 12
AR2-10.15CMK str. 12



AR3-10.16CM str. 14
AR3-10.16CMH str. 14
AR3-14.20CT str. 14
AR3-14.20CTH str. 14



AR5-10.15CM str. 16
AR5-15.18CT str. 16



AR5-15.23CT str. 18
AR5-21.18CT str. 18
AR5-21.23CT str. 18



AR8-10.15CMW HW str. 20
AR8-14.20CTW HW str. 20



AR9-12.22CL str. 24
AR9-12.22CH str. 26



AR9-16.28CL str. 28
AR9-16.28CL PRO str. 28
AR9-16.28CH PRO str. 30



AR1-8.16HM str. 38
AR2-8.17HM str. 38



AR4-10.16HM str. 40
AR4-15.18HT str. 40
AR4-15.23HT str. 40



AR5-15.18HT str. 42
AR5-15.23HT str. 42
AR5-21.18HT str. 42



AR6-15.23HT str. 44
AR6-21.23HT str. 44
AR6-21.18HT str. 44



AR1-V22BX str. 52



AR1-V35BX str. 54



AR1-V35BP str. 56



AR2-V65BPHD str. 58
AR3-V65BPHD str. 58




AR2-V65BPHT str. 60
AR3-V65BPHT str. 60



AR2-V65BXHT str. 62
AR3-V65BXHT str. 62




AR2-V65BXHDL str. 64

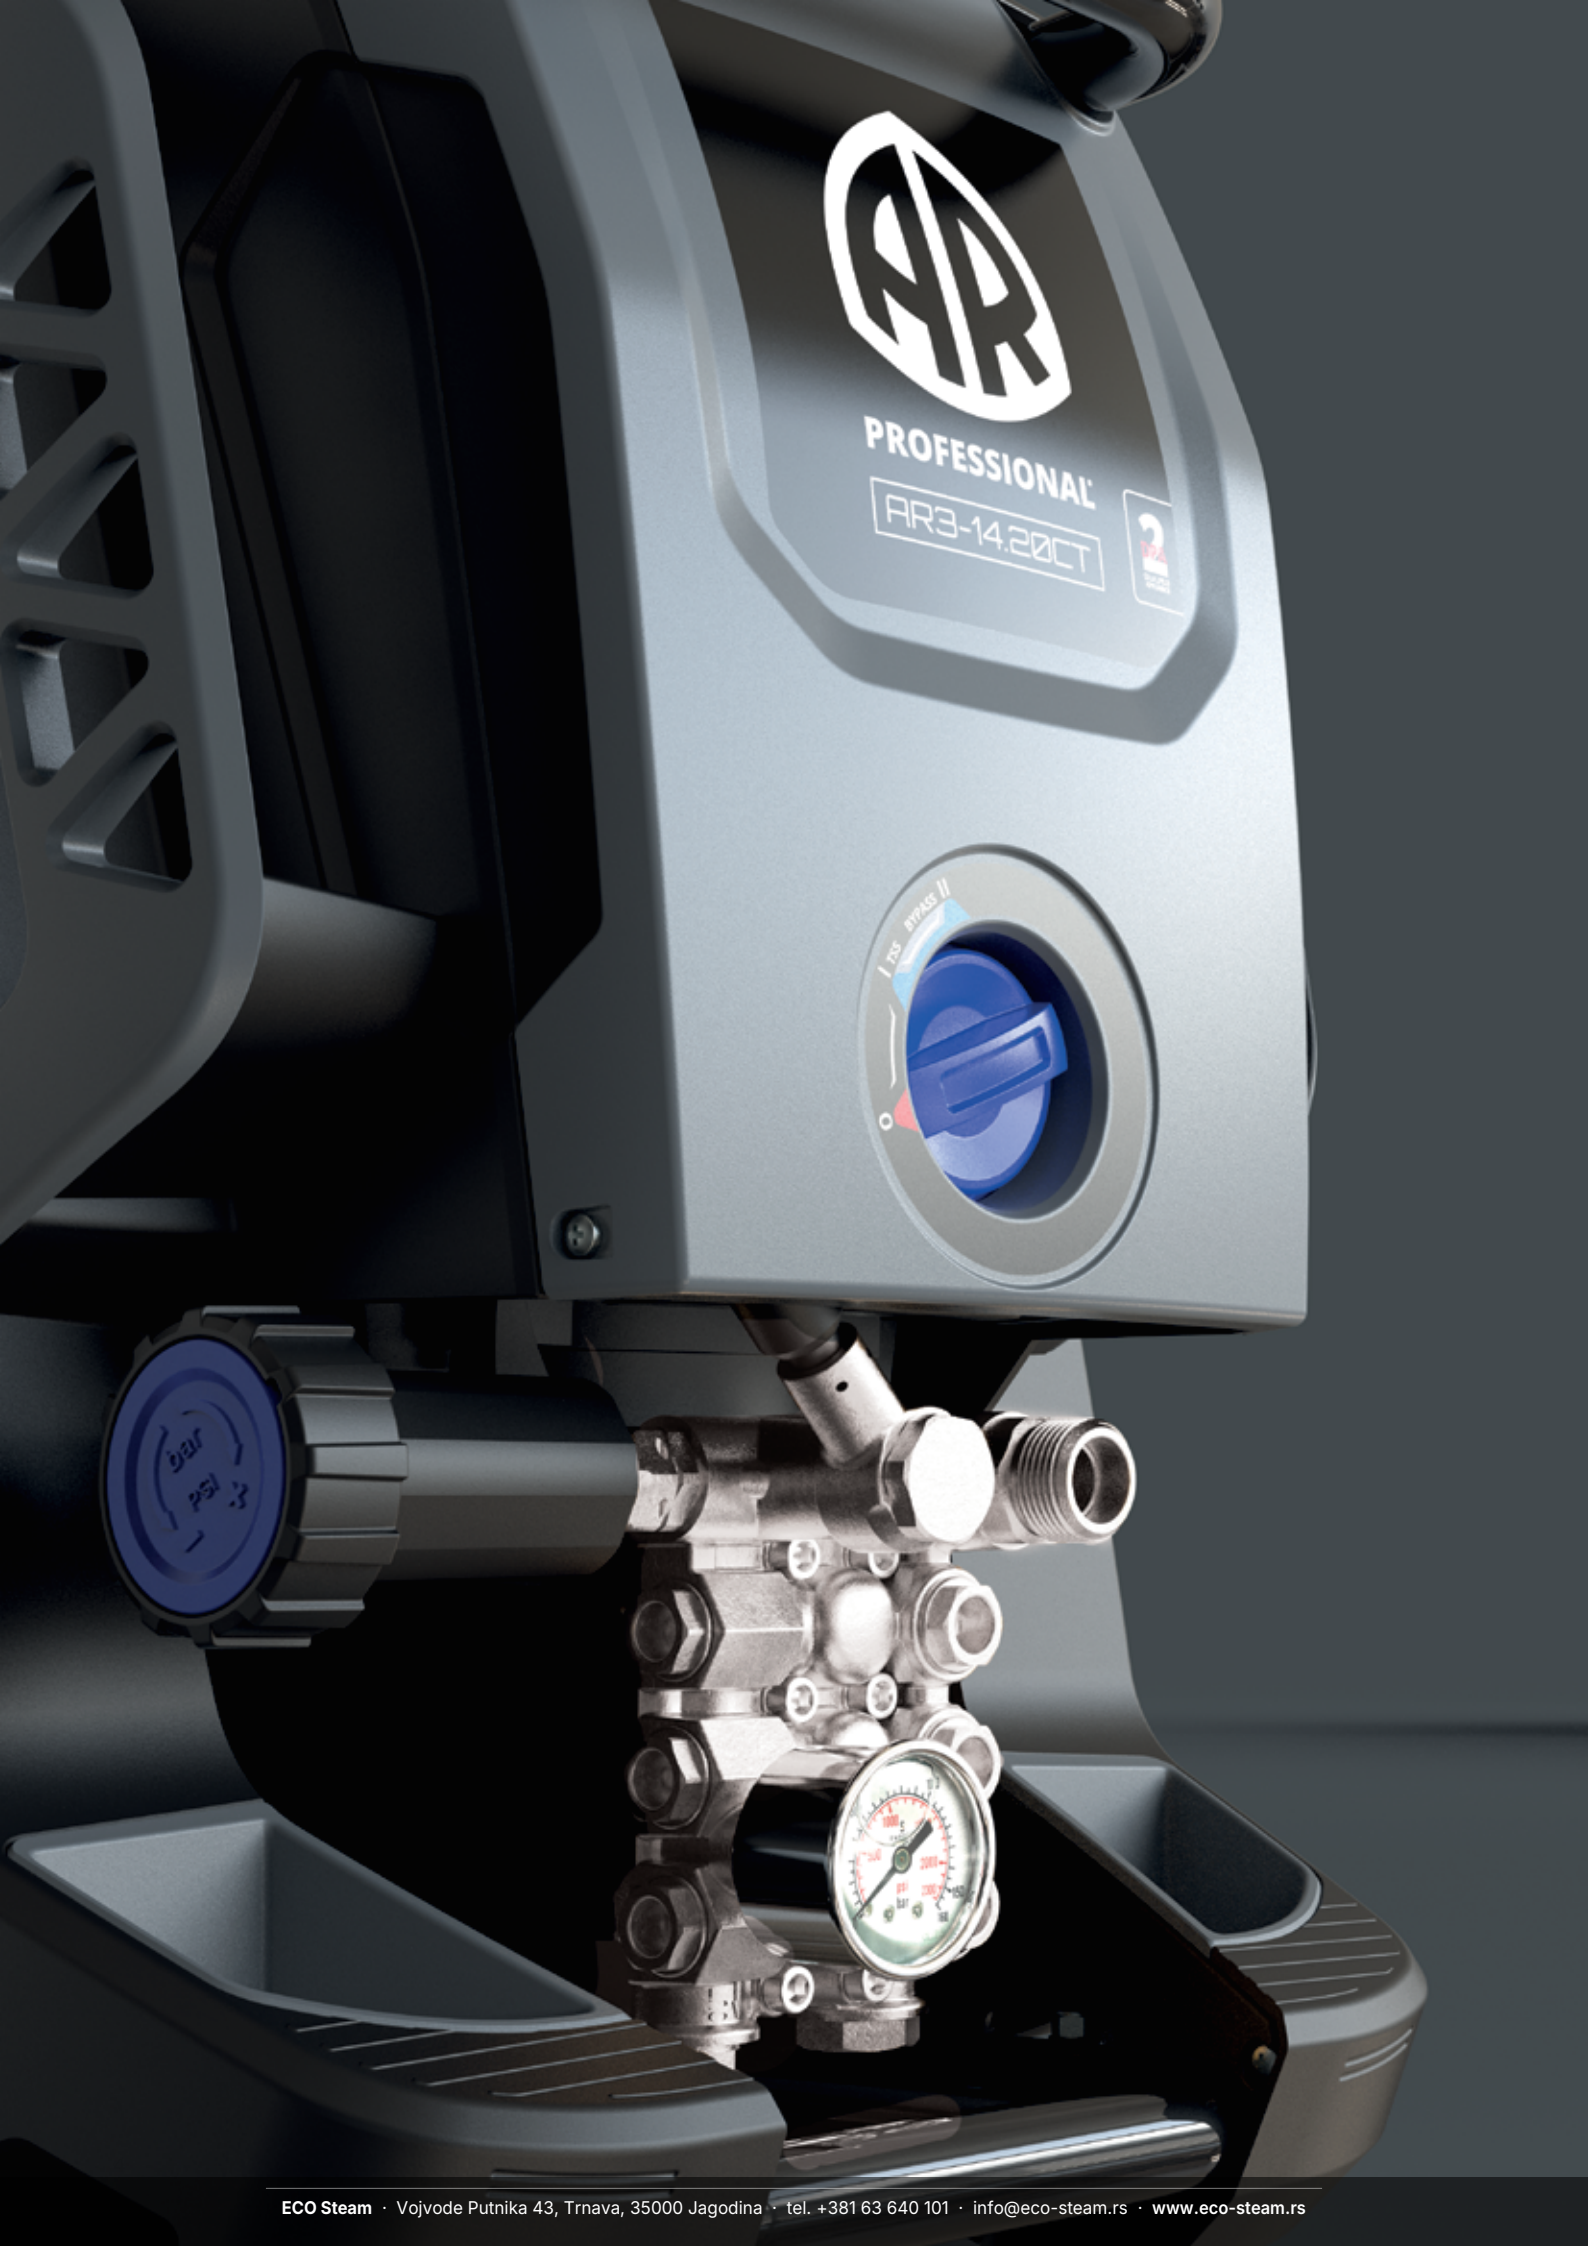

PROFESSIONAL

AR3-14.20CT

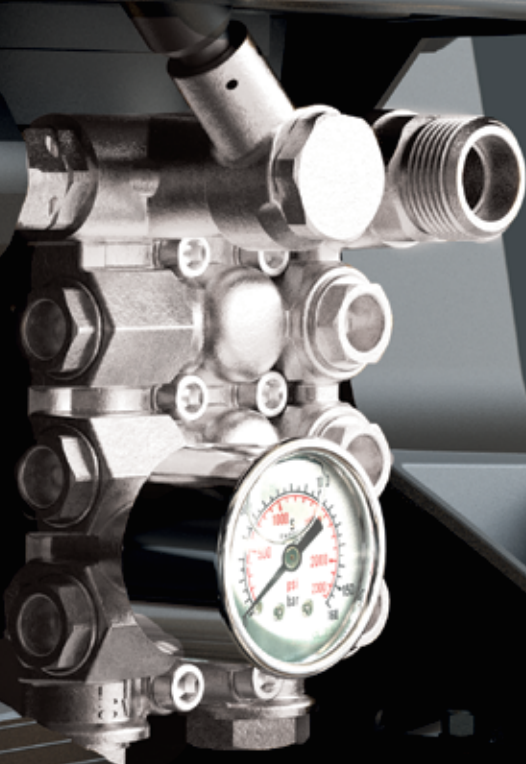

DUAL PRO APPLIANCE SYSTEM



DPA is the innovative technological system that allows to select the operating mode of the high pressure washer by acting on the three position switch: O / I / II. A system created for demanding users such as professionals who want to carry out heavy dirt removal work, it is ideal for washing cars, outdoor surfaces and objects and it is suitable for the maintenance of trucks and agricultural machinery.

DPA je inovativni tehnološki sistem koji omogućava izbor režima rada perača pod pritiskom pomoću prekidača sa tri položaja: O / I / II. Sistem namenjen zahtevnim korisnicima, kao što su profesionalci koji uklanjaju teške nečistoće; idealan je za pranje automobila, spoljnih površina i predmeta, kao i za održavanje kamiona i poljoprivrednih mašina.

I TOTAL STOP SYSTEM

Particularly suitable during the normal use of the pressure washer, it allows the immediate stop of the same when the gun is released. **This system allows lower energy consumption and reduces the wear of the pump and the motor.**

*Posebno pogodan za uobičajenu upotrebu perača pod pritiskom; omogućava trenutno zaustavljanje uređaja kada se pištolj otpusti. **Ovaj sistem obezbeđuje manju potrošnju energije i smanjuje habanje pumpe i motora.***



II BY-PASS SYSTEM

The by-pass system is suitable for **intensive use conditions** in which the pressure washer is subject to **frequent stops and restarts** or if it is used in harsh environmental conditions (e.g. high temperatures, high ambient humidity, environments with low air circulation).

*By-pass sistem je pogodan za uslove **intenzivne upotrebe** u kojima je perač izložen **čestim zaustavljanjima i pokretanjima** ili ako se koristi u teškim uslovima okoline (npr. visoke temperature, visoka vlažnost vazduha, prostor sa slabom cirkulacijom vazduha).*





SERIJA SAHLADNOM VODOM





AR1 - 8.17 CM
AR1 - 10.19 CMH



MAX bar
170÷190



MAX l/h
500÷600



kW
2.5÷2.7

AR1-8.17CM



AR1-10.19CMH



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- High pressure washer equipped with rubber wheels (Ø 200 mm), telescopic handle and hose reel (AR1-10.19CMH)
- Built-in accessory holder
- Pressure adjustment (AR1-10.19CMH)
- Pressure gauge
- Steel braided hose
- Self-priming function (SPF)
- Perač pod pritiskom sa točkovima (Ø 200 mm) sa gumenim gaznim slojem, teleskopskom drškom i motalicom (AR1-10.19CMH)
- Integrirani držač pribora
- Regulacija pritiska (AR1-10.19CMH)
- Manometar
- Crevo ojačano čeličnim opletom
- Funkcija samousisavanja (SPF)



TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA	 MAX	 MAX			 KG NET				
		bar	psi	l/h	gph	kW	o/min	V	Hz	kg
AR1-8.17CM	15684	170	2465	500	132	2.5	2800	230	50	20.7
AR1-10.19CMH	15685	190	2600	600	159	2.7	2800	220-240~	50	25.0

HRM

- 3 Axial stainless steel pistons wobble-plate pump
- Tempered stainless steel pistons
- Brass pump head
- Integrated valve
- Automatic by-pass valve with pump head pressure discharge
- Single-phase induction motor with thermal protection
- Total Stop System for high pressure washers (TSS)
- High pressure sealing system with double seal

- Pumpa sa 3 aksijalna klipa i oscilujućom pločom
- Klipovi od kaljenog inoksa
- Glava pumpe od mesinga
- Integrirani ventil
- Automatski sigurnosni ventil sa rasterećenjem pritiska u glavi pumpe
- Monofazni indukcionni elektromotor sa termičkom zaštitom
- Trenutno potpuno zaustavljanje perača (TSS)
- Visokopritisno zaptivanje sa dvostrukom zaptivkom



STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	48145	48158	48146	48147
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	quick coupling / brza spojnica	
outlet / izlaz	M22x1,5 F	quick coupling / brza spojnica		-
model / model			AR1-8.17CM	AR1-10.19CMH



			8 m	10 m		
code / šifra	48149	48148	3083830	4581170	4581160	3082130
inlet / ulaz	quick coupling / brza spojnica		M22x1,5 F	M22x1,5 F	M22x1,5 M	-
outlet / izlaz	-	-	M22x1,5 F	M22x1,5 F	-	-
model / model	AR1-8.17CM	AR1-10.19CMH	AR1-8.17CM	AR1-10.19CMH		

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	 GROSS		 PUN KAMION	 20"	 40"	 40"HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR1-8.17CM	420 x 395 x 740	449 x 388 x 895	24.2	10°	330	224~	464~	522
AR1-10.19CMH	420 x 395 x 770	449 x 388 x 895	28	10°	330	210~	435~	-

*Europaleta | ~ Floor loaded / rasuto



AR2 - 8.16 CMK



MAX bar
160




MAX l/h
500



kW
2.5

AR2-8.16CMK



Detachable /
odvojivo

GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- High pressure washer with sturdy frame and rubber wheels (Ø 250 mm) for a better maneuverability
- Easy unlock button for stand alone use
- Pressure adjustment
- Steel braided hose (10 m)
- Built-in detergent suction
- Self-priming function (SPF)
- *Perač sa robusnim kolicima i točkovima (Ø 250 mm) za bolju upravljivost*
- *Brzo odvajanje za samostalnu upotrebu*
- *Regulacija pritiska*
- *Crevo ojačano čeličnim opletom (10 m)*
- *Ugrađeno usisavanje deterdženta*
- *Funkcija samousisavanja (SPF)*

TECHNICAL DATA / TEHNIČKI PODACI



MODEL	AR ŠIFRA	 MAX	 MAX		 KG NET					
		bar	psi	l/h	gph	kW	o/min	V	Hz	kg
AR2-8.16CMK	15689	160	2320	500	132	2.5	2800	220-240~	50	26.7

HJRS



- Triplex pump with tempered stainless steel ceramic coated pistons and connecting rod system with brass pump head
- Integrated valve
- Automatic by-pass valve with pump head pressure discharge
- Single-phase induction motor with thermal protection
- Total Stop System for high pressure washers (TSS)
- High-pressure sealing system with double seal

- Pumpa sa 3 klipa od kaljenog inoksa sa keramičkim slojem, klipnjačno-kolenasti pogon, glava pumpe od mesinga
- Integrirani ventil
- Automatski sigurnosni ventil sa rasterećenjem pritiska u glavi pumpe
- Monofazni indukcionni elektromotor sa termičkom zaštitom
- Trenutno potpuno zaustavljanje perača (TSS)
- Visokopritisno zaptivanje sa dvostrukom zaptivkom



STANDARD ACCESSORIES / SERIJSKA OPREMA



10 m

code / šifra	47209 Swivel	46814	3960970
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	M22x1,5 F
outlet / izlaz	M22x1,5 F	-	M22x1,5 F



code / šifra	3082130
inlet / ulaz	-
outlet / izlaz	-

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	 GROSS	 PUN KAMION	 20"	 40"	 40" HQ	
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR2-8.16CMK	497 x 494 x 605	449 x 452 x 905	31.4	12*	312	132~	276~	276~

* Paleta | ~ Floor loaded / rasuto



AR2 - 10.15 CM
AR2 - 10.15 CMK*

*on request / na zahtev


MAX bar
150




MAX l/h
600


kW
2.6

AR2-10.15CM



AR2-10.15CMK*



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- High pressure washer with **Dual PRO Appliance system** that allows to select **by-pass** or **total stop system** mode
- Sturdy kart for an easy transport (AR2-10.15 CMK)
- Easy unlock button for stand alone use (AR2-10.15 CMK)
- Pressure adjustment
- Pressure gauge
- Gun with swivel
- Steel braided hose (10 m)
- Self-priming function (SPF)
- Perač pod pritiskom sa **sistemom Dual PRO Appliance** integrisanim, uz izbor režima **by-pass** ili **total stop system** (trenutno zaustavljanje)
- Robusni ram za lakše rukovanje (AR2-10.15 CMK)
- Brzo odvajanje za samostalnu upotrebu (AR2-10.15 CMK)
- Regulacija pritiska
- Manometar
- Pištolj sa obrtnim priključkom
- Crevo ojačano čeličnim opletom (10 m)
- Funkcija samousisavanja (SPF)

TECHNICAL DATA / TEHNIČKI PODACI



MODEL	AR ŠIFRA	 MAX				 MAX								 KG NET	
		bar maks.	bar radni	psi maks.	psi radni	l/h radni	gph radni	KS	kW	kW radni	o/min	V	Hz	kg	
AR2-10.15CM	15765	150	120	2175	1740	600	158	2.7	2.0	2.6	1450	220-240~	50	23.5	
AR2-10.15CMK*	15692	150	120	2175	1740	600	158	2.7	2.0	2.6	1450	220-240~	50	34.5	

* On request / na zahtev

HRC



- Triplex pump with ceramic pistons and connecting rod system with brass pump head
- Integrated valve
- Automatic by-pass valve with pump head pressure discharge
- Induction motor with thermal protection
- Total Stop System for high pressure washers (TSS)
- High-pressure sealing system with double seal
- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, glava pumpe od mesinga
- Integrirani ventil
- Automatski bypass ventil sa rasterećenjem pritiska u glavi pumpe
- Indukcioni elektromotor sa termičkom zaštitom
- Trenutno potpuno zaustavljanje perača (TSS)
- Visokopritisno zaptivanje sa dvostrukom zaptivkom



STANDARD ACCESSORIES / SERIJSKA OPREMA



10 m

code / šifra	47209 Swivel	47748 (043)	3960970
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	M22x1,5 F
outlet / izlaz	M22x1,5 F	-	M22x1,5 F



code / šifra	3082130
inlet / ulaz	-
outlet / izlaz	-

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	 GROSS	 PUN KAMION	 20"	 40"	 40" HQ	
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR2-10.15CM	500 x 300 x 360	390 x 240 x 230	29	24*	792	264~	576~	792
AR2-10.15CMK	485 x 495 x 600	449 x 452 x 905	36	12*	312	120~	252~	-

* Paleta | *Europaleta | ~ Floor loaded / rasuto



AR3 - 10.16 CM
 AR3 - 10.16 CMH
 AR3 - 14.20 CT
 AR3 - 14.20 CTH



MAX bar
160÷200



MAX l/h
600÷840



kW
3.0÷5.0

AR3-14.20CT



AR3-14.20CTH



Vertical and horizontal use /
 Vertikalna i horizontalna upotreba



DPA system /
 DPA sistem



Flanged pressure unloader with
 brass inlet / Prirubnički regulacioni ventil
 sa mesinganim ulazom

GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- High pressure washer with **Dual PRO Appliance** system that allows to select **by-pass** or **total stop timed** system mode. Sturdy frame and rubber wheels (Ø 220 mm)
- High pressure washer with dual use: horizontal and vertical
 - Pressure adjustment and pressure gauge
 - Gun with swivel
 - Steel braided hose (10 m)
 - Self-priming function (SPF)
- Perač pod pritiskom sa sistemom **Dual PRO Appliance** integrisanim, uz izbor režima **by-pass** ili **total stop system sa odlaganjem**. Robusna kolica sa točkovima (Ø 220 mm)
- Perač sa dvostrukom upotrebom: horizontalno i vertikalno
 - Regulacija pritiska i manometar
 - Pištalj sa obrtnim priključkom
 - Crevo ojačano čeličnim opletom (10 m)
 - Funkcija samousisavanja (SPF)



TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA													
		bar maks.	bar radni	psi maks.	psi radni	l/h radni	gph radni	KS	kW	kW radni	o/min	V	Hz	kg
AR3-10.16CM	15723	160	130	2320	1885	600	158	3	2.2	3	1450	220-240 ~	50	37.6
AR3-10.16CMH	15825	160	130	2320	1885	600	158	3	2.2	3	1450	220-240 ~	50	38.8
AR3-14.20CT	15686	200	180	2900	2610	840	222	6.1	4.5	5	1450	400 3~	50	45.9
AR3-14.20CTH	15826	200	180	2900	2610	840	222	6.1	4.5	5	1450	400 3~	50	47.1

(15723) (15686)
HRC / HRC + VRZ

- Triplex pump with ceramic pistons and connecting rod system with nichel-plated pump head
- Flanged valve with brass inlet
- Automatic by-pass valve with pump head pressure discharge
- Induction motor with thermal protection
- Time delayed auto stop/start with stop for motor overloading (TST)
- High-pressure sealing system with double seal

- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, niklovana glava pumpe
- Prirubnički ventil sa mesinganim ulazom
- Automatski bypass ventil sa rasterećenjem pritiska u glavi pumpe
- Indukcioni elektromotor sa termičkom zaštitom
- Potpuno zaustavljanje sa odlaganjem perača (TST)
- Visokopritisno zaptivanje sa dvostrukom zaptivkom



STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	47209 Swivel	50690	3082 (1504)	3086 (15045)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M	1/4 NPT M
outlet / izlaz	M22x1,5 F	-	-	-

AR3-10.16CM AR3-14.20CT



10 m

code / šifra	3083550
inlet / ulaz	M22x1,5 F
outlet / izlaz	M22x1,5 F

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	 GROSS		 KAMION	 20"	 40"	 40"HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR3-10.16CM	390 x 410 x 800	377 x 385 x 955	44,7	12°	396°	132*	288*	288*
AR3-10.16CMH	390 x 410 x 800	377 x 385 x 955	45,9	12°	396°	132*	288*	288*
AR3-14.20CT	390 x 410 x 800	377 x 385 x 955	46,3	12°	396°	132*	288*	288*
AR3-14.20CTH	390 x 410 x 800	377 x 385 x 955	47,5	12°	396°	132*	288*	288*



AR5 - 10.15 CM
AR5 - 15.18 CT



MAX bar
150÷180



MAX l/h
630÷900



kW
3.0÷5.0

AR5-10.15CM



Flanged pressure unloader /
Prirubnički regulacioni ventil

GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- High pressure washer with sturdy frame and rubber wheels (Ø 300 mm) for a better maneuverability
- Pressure adjustment
- Pressure gauge
- Gun with swivel
- Steel braided hose (10 m)
- Inspectable water intake filter
- Self-priming function (SPF)
- Perač sa robusnim kolicima i točkovima (Ø 300 mm) za bolju upravljivost
- Regulacija pritiska
- Integrirani manometar
- Pištolj sa obrtnim priključkom
- Crevo ojačano čeličnim opletom (10 m)
- Ulazni filter za vodu, dostupan za pregled
- Funkcija samousisavanja (SPF)



TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA	 MAX				 MAX								 KG NET
		bar maks.	bar radni	psi maks.	psi radni	l/h radni	gph radni	KS	kW	kW radni	o/min	V	Hz	kg
AR5-10.15CM	15653	150	120	2175	1740	630	166	3	2.2	3	1450	220-240~	50	39.8
AR5-15.18CT	15654	180	150	2600	2175	900	238	6.1	4.5	5	1450	400 3~	50	44

HRC + VRZ

- Triplex pump with ceramic pistons and connecting rod system with nichel-plated pump head
- Flanged valve
- Automatic by-pass valve with pump head pressure discharge
- Induction motor with thermal protection
- Time delayed auto stop/start with stop for motor overloading (TST)

- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, niklovana glava pumpe
- Priрубnički ventil
- Automatski bypass ventil sa rasterećenjem pritiska u glavi pumpe
- Indukcioni elektromotor sa termičkom zaštitom
- Potpuno zaustavljanje peraa sa odlaganjem (TST)



STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	47209 Swivel	46221	3195 (15035)	3086 (15045)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M	1/4 NPT M
outlet / izlaz	M22x1,5 F	1/4 NPT F	-	-
model / model			AR5-10.15CM	AR5-15.18CT



10 m



code / šifra	3961050	41807 (mesh 80)
inlet / ulaz	M22x1,5 F	-
outlet / izlaz	M22x1,5 F	-

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	 GROSS	 PUN KAMION	 20"	 40"	 40" HQ	
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR5-10.15CM	720 x 520 x 565	700 x 480 x 990	45.1	12*	396	96~	192~	-
AR5-15.18CT	720 x 520 x 565	700 x 480 x 990	46.4	12*	396	96~	192~	-

* Paleta | ~ Floor loaded / rasuto



AR5 - 15.23 CT

AR5 - 21.18 CT

AR5 - 21.23 CT



MAX bar
180÷230



MAX l/h
900÷1260



kW
7.4÷9.6

AR5-15.23CT



Flanged pressure unloader /
Prirubnički regulacioni ventil

GENERAL FEATURES / OPŠTE KARAKTERISTIKE



- High pressure washer with sturdy frame and rubber wheels (Ø 300 mm) for a better maneuverability
- Pressure valve adjustment
- Pressure gauge
- Gun with swivel
- Steel braided hose (10 m)
- Detergent injector
- Inspectable water intake filter
- Self-priming function (SPF)
- Perač sa robusnim kolicima i točkovima (Ø 300 mm) za bolju upravljivost
- Ventil za regulaciju pritiska
- Integrirani manometar
- Pištolj sa obrtnim priključkom
- Crevo ojačano čeličnim opletom (10 m)
- Ugrađeno usisavanje deterdženta
- Ulazni filter za vodu, dostupan za pregled
- Funkcija samousisavanja (SPF)

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA	 MAX				 MAX									 KG NET
		bar maks.	bar radni	psi maks.	psi radni	l/h radni	gph radni	KS	kW	kW radni	o/min	V	Hz	kg	
AR5-15.23CT	15655	230	200	3336	2900	900	238	7.5	5.5	7.4	1450	400 3~	50	55.4	
AR5-21.18CT	15687	180	150	2610	2175	1260	333	7.5	5.5	7.4	1450	400 3~	50	55.4	
AR5-21.23CT	15688	230	200	3336	2900	1260	333	9.6	7	9.6	1450	400 3~	50	61.6	

HRR + VRZ

- Triplex pump with ceramic pistons and connecting rod system with nichel-plated pump head
- Flanged valve
- Automatic by-pass valve with pump head pressure discharge
- Induction motor with thermal protection
- Time delayed auto stop/start with stop for motor overloading (TST)
- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, niklovana glava pumpe
- Prirubnički ventil
- Automatski bypass ventil sa rasterećenjem pritiska u glavi pumpe
- Indukcioni elektromotor sa termičkom zaštitom
- Potpuno zaustavljanje sa odlaganjem perača (TST)



STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	47209 Swivel	46221	3083 (1505)	3086 (15045)	3157 (1508)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M	1/4 NPT M	1/4 NPT M
outlet / izlaz	M22x1,5 F	1/4 NPT F	-	-	-
model / model	AR5-21.23CT AR5-15.23CT AR5-21.18CT				



10 m

code / šifra	3961050	41807 (mesh 80)
inlet / ulaz	M22x1,5 F	-
outlet / izlaz	M22x1,5 F	-

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	 GROSS					
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR5-15.23CT	770 x 550 x 550	910 x 540 x 980	61.5	6*	198	90~	180~	-
AR5-21.18CT	770 x 550 x 550	910 x 540 x 980	61.7	6*	198	90~	180~	-
AR5-21.23CT	770 x 550 x 550	910 x 540 x 980	65.5	6*	198	90~	180~	-

* Paleta | Floor loaded / rasuto



AR8 - 10.15 CMW HW
AR8 - 14.20 CTW HW



MAX bar
150÷200



MAX l/h
600÷840




kW
2.6÷5.0

AR8-10.15CMW HW



DPA system /
DPA sistem



Wall mounted /
zidna montaža



Flanged pressure unloader /
Prirubnički regulacioni ventil

GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- High pressure washer with **Dual PRO Appliance** system that allows to select **by-pass** or **total stop system** mode (15612) / **total stop system timed** (15613).
- Sturdy stainless steel cover
- Pressure adjustment
- Pressure gauge
- Reinforced non marking hose (10 m)
- Gun with swivel
- Stainless steel lance
- Perač pod pritiskom sa sistemom **Dual PRO Appliance** integrisanim, uz izbor režima **by-pass** ili **total stop system** (15612) / **total stop system sa odlaganjem** (15613)
- Robusno kućište od nerđajućeg čelika
- Regulacija pritiska
- Manometar
- Ojačano crevo bez tragova (10 m)
- Pištolj sa obrtnim priključkom
- Koplje od nerđajućeg čelika



TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA	 MAX				 MAX								 NET
		bar maks.	bar radni	psi maks.	psi radni	l/h radni	gph radni	KS	kW	kW radni	o/min	V	Hz	kg
AR8-10.15CMW HW	15612	150	120	2175	1740	630	166	2.7	2	2.6	1450	220-240~	50	33.3
AR8-14.20CTW HW	15613	200	180	2900	2600	840	238	5.5	4	5	1450	400 3~	50	36.3

(15612) (15613) HRC / HRC + VRZ

- Triplex pump with ceramic pistons and connecting rod system with nichel-plated pump head
- Integrated valve (15612)
- Flanged valve (15613)
- Automatic by-pass valve with pump head pressure discharge
- Induction motor with thermal protection
- Total Stop System for high pressure washers (TSS) (15612)
- Time delayed auto stop/start with stop for motor overloading (TST) (15613)

- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, niklovana glava pumpe
- Integrisani ventil (15612)
- Prirubnički ventil (15613)
- Automatski bypass ventil sa rasterećenjem pritiska u glavi pumpe
- Indukcioni elektromotor sa termičkom zaštitom
- Trenutno potpuno zaustavljanje perača (TSS) (15612)
- Potpuno zaustavljanje sa odlaganjem perača (TST) (15613)



15612

15613

STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	47209 Swivel	47078	3082 (1504)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M
outlet / izlaz	M22x1,5 F	1/4 NPT F	-



10 m



code / šifra	5640190	51702
inlet / ulaz	M22x1,5 F	-
outlet / izlaz	M22x1,5 F	-

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	 GROSS					
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR8-10.15CMW HW	642 x 342 x 384	562 x 314 x363	39.8	12'	396	264	300	-
AR8-14.20CTW HW	642 x 342 x 384	562 x 314 x363	42.6	12'	396	264	300	-

*Europaleta | Floor loaded / rasuto





SERIJA SA BENZINSKIM MOTOROM



AR9 - 12.22 CL



MAX bar
220



MAX l/h
720



KS
5.3

AR9-12.22CL



Flanged pressure unloader /
Prirubnički regulacioni ventil

GENERAL FEATURES / OPŠTE KARAKTERISTIKE




- Petrol driven high pressure washer
- Sturdy frame and rubber wheels (Ø 300 mm) for a better maneuverability
- Easy maintenance
- Thermal relief valve
- Low oil alert
- Drain plugs and slots to facilitate oil change
- Pressure adjustment
- Gun with swivel
- Steel braided hose (10 m)
- Self-priming function (SPF)
- Perač pod visokim pritiskom sa benzinskim motorom
- Robusni ram i točkovi (Ø 300 mm) sa gumenim gaznim slojem za bolju upravljivost
- Jednostavno održavanje
- Termostatski ventil za zaštitu od pregrevanja
- Zaštita od nedostatka ulja u motoru
- Čepovi i otvori za lakšu zamenu ulja
- Regulacija pritiska
- Pištolj sa obrtnim priključkom
- Crevo ojačano čeličnim opletom (10 m)
- Funkcija samousisavanja (SPF)

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA	 MAX				 MAX						kW	kg
		bar maks.	bar radni	psi maks.	psi radni	l/h maks.	l/h radni	gph maks.	gph radni	o/min	motor		
AR9-12.22CL	15691	220	160	3190	2320	720	600	190	159	3400	LONCIN G200F - 5.3	4.1	33.3

RCV+VRZ

- Triplex pump with ceramic pistons and connecting rod system with nichel-plated pump head
- Flanged valve
- Automatic by-pass valve with pump head pressure discharge
- Direct coupling of pump with gasoline motor
- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, niklovana glava pumpe
- Prirubnički ventil
- Automatski sigurnosni ventil sa rasterećenjem pritiska u glavi pumpe
- Direktna veza pumpe i motora



STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	47209 Swivel	46221	3195 (15035)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M
outlet / izlaz	M22x1,5 F	1/4 NPT F	



10 m



code / šifra	3960970	3082130
inlet / ulaz	M22x1,5 F	-
outlet / izlaz	M22x1,5 F	-

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	 GROSS		 PUN KAMION			
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR9-12.22CL	520 x 690 x 565	770 x 480 x 890	38.3	6*	198	140~	292~	-

*Europaleta | ~ Floor loaded / rasuto



AR9 - 12.22 CH



MAX bar
220



MAX l/h
720



KS
5.7

AR9-12.22CH



Flanged pressure unloader /
Prirubnički regulacioni ventil

GENERAL FEATURES / OPŠTE KARAKTERISTIKE



- Petrol driven high pressure washer
- Sturdy frame and rubber wheels (Ø 300 mm) for a better maneuverability
- Easy maintenance
- Thermal relief valve
- Low oil alert
- Drain plugs and slots to facilitate oil change
- Pressure adjustment
- Gun with swivel
- Steel braided hose (10 m)
- Self-priming function (SPF)
- Perač pod visokim pritiskom sa benzinskim motorom
- Robusni ram i točkovi (Ø 300 mm) sa gumenim gaznim slojem za bolju upravljivost
- Jednostavno održavanje
- Termostatski ventil za zaštitu od pregrevanja
- Zaštita od nedostatka ulja u motoru
- Čepovi i otvori za lakšu zamenu ulja
- Regulacija pritiska
- Pištolj sa obrtnim priključkom
- Crevo ojačano čeličnim opletom (10 m)
- Funkcija samousisavanja (SPF)

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA	 MAX				 MAX							 KG NET
		bar maks.	bar radni	psi maks.	psi radni	l/h maks.	l/h radni	gph maks.	gph radni	o/min	motor	kW	kg
AR9-12.22CH	15690	220	160	3190	2320	720	600	190	159	3400	HONDA GP200H - 5.7	4.3	33.3

RCV+VRZ

- Triplex pump with ceramic pistons and connecting rod system with nichel-plated pump head
- Tempered stainless steel pistons
- Flanged valve
- Automatic by-pass valve with pump head pressure discharge
- Direct coupling of pump with gasoline motor
- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, niklovana glava pumpe
- Klipovi od kaljenog inoksa
- Prirubnički ventil
- Automatski sigurnosni ventil sa rasterećenjem pritiska u glavi pumpe
- Direktna veza pumpe i motora



STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	47209 Swivel	46221	3195 (15035)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M
outlet / izlaz	M22x1,5 F	1/4 NPT F	-



10 m



code / šifra	3960970	3082130
inlet / ulaz	M22x1,5 F	-
outlet / izlaz	M22x1,5 F	-

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	 GROSS		 PUN KAMION	 20"	 40"	 40" HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR9-12.22CH	520 x 690 x 565	771 x 458 x 926	38.1	6	198	140~	296~	-

~ Floor loaded / rasuto



AR9 - 16.28 CL
AR9 - 16.28 CL PRO



MAX bar
280




MAX l/h
960



KS
11÷11.7

AR9-16.28CL



gear box / reduktor obrtaja
šif. 29897



throttle control /
automatski regulator gasa
šif. 51534



puncture-proof wheels /
točkovi otporni na bušenje



Flanged pressure unloader /
Prirubnički regulacioni ventil

GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Petrol driven high pressure washer
- Sturdy frame and puncture-proof rubber wheels (Ø 300 mm) for a better maneuverability
- Easy maintenance
- Thermal relief valve
- Low oil alert
- Throttle control (AR9 - 16.28 CL PRO)
- Pressure adjustment
- Gun with swivel
- Steel braided hose (10 m)
- Self-priming function (SPF)
- Perač pod visokim pritiskom sa benzinskim motorom
- Robusni ram i točkovi (Ø 300 mm) otporni na bušenje, sa gumenim gaznim slojem za bolju upravljivost
- Jednostavno održavanje
- Termostatski ventil za zaštitu od pregrevanja
- Zaštita od nedostatka ulja u motoru
- Reduktor broja obrtaja (AR9 - 16.28 CL PRO)
- Regulacija pritiska
- Pištolj sa obrtnim priključkom
- Crevo ojačano čeličnim opletom (10 m)
- Funkcija samousisavanja (SPF)

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA	 MAX				 MAX						 KG NET	
		bar maks.	bar radni	psi maks.	psi radni	l/h maks.	l/h radni	gph maks.	gph radni	o/min	motor	kW	kg
AR9-16.28CL	15693	280	230	4060	3335	960	830	254	219	3400	LONCIN G390F - 11	8.2	56.7
AR9-16.28CL PRO	15694	280	230	4060	3335	960	830	254	219	1750	LONCIN G390F - 11.7	8.7	56.7





(15693) **RRV + VRZ** / (15694) **RRR + VRZ** + gear box (GB) / reduktor obrtaja (CR)

- Triplex pump with ceramic pistons and connecting rod system with nichel-plated pump head
- Tempered stainless steel pistons
- Flanged valve
- Automatic by-pass valve with pump head pressure discharge
- Direct coupling of pump with gasoline motor (15693) / throttle control (15694)

- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, niklovana glava pumpe
- Klipovi od kaljenog inoksa
- Prirubnički ventil
- Automatski bypass ventil sa rasterećenjem pritiska u glavi pumpe
- Direktna veza pumpe i motora (15693) / reduktor obrtaja (15694)



for/za (15694)
gear box (GB) /
reduktor obrtaja (CR)



STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	47209 Swivel	46221	3082 (1504)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M
outlet / izlaz	M22x1,5 F	1/4 NPT F	



10 m



code / šifra	4001180	3082130
inlet / ulaz	M22x1,5 F	-
outlet / izlaz	M22x1,5 F	-

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	 GROSS		 PUN KAMION			
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR9-16.28CL	830 x 595 x 640	900 x 530 x 900	63.5	6	198	72~	156~	-
AR9-16.28CL PRO	830 x 595 x 640	900 x 530 x 900	65.9	6	198	72~	156~	-

~ Floor loaded / rasuto



AR9 - 16.28 CH PRO



MAX bar
280




MAX l/h
960



KS
11.7

AR9-16.28CH PRO



gear box / reduktor obrtaja
šif. 29897



throttle control /
automatski regulator gasa
šif. 51534



puncture-proof wheels /
točkovi otporni na bušenje



Flanged pressure unloader /
Prirubnički regulacioni ventil

GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Petrol driven high pressure washer
- Sturdy frame and puncture-proof rubber wheels (Ø 300 mm) for a better maneuverability
- Easy maintenance
- Throttle control
- Pressure adjustment
- Low oil alert
- Built-in detergent suction
- Gun with swivel
- Steel braided hose (10 m)
- Self-priming function (SPF)
- Perač pod visokim pritiskom sa benzinskim motorom
- Robusni ram i točkovi otporni na bušenje, sa gumenim gaznim slojem za bolju upravljivost
- Jednostavno održavanje
- Reduktor broja obrtaja
- Regulacija pritiska
- Zaštita od nedostatka ulja u motoru
- Integrirano usisavanje deterdženta
- Pištolj sa obrtnim priključkom
- Crevo ojačano čeličnim opletom (10 m)
- Funkcija samousisavanja (SPF)

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA	 MAX				 MAX						 KG NET	
		bar maks.	bar radni	psi maks.	psi radni	l/h maks.	l/h radni	gph maks.	gph radni	o/min	motor	kW	kg
AR9-16.28CH PRO	15695	280	230	4060	3335	960	830	254	219	1750	HONDA GX 390 - 11.7	8.7	56.7

RRA + VRZ +



gear box (GB) /
reduktor obrtaja (CR)

- Triplex pump with ceramic pistons and connecting rod system with nichel-plated pump head
- Tempered stainless steel pistons
- Flanged valve
- Automatic by-pass valve with pump head pressure discharge
- Gear box

- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, niklovana glava pumpe
- Klipovi od kaljenog inoksa
- Prirubnički ventil
- Automatski bypass ventil sa rasterećenjem pritiska u glavi pumpe
- Reduktor broja obrtaja



gear box (GB) /
reduktor obrtaja (CR)



STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	47209 Swivel	46221	3082 (1504)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M
outlet / izlaz	M22x1,5 F	1/4 NPT F	



10 m



code / šifra	4001180	3082130
inlet / ulaz	M22x1,5 F	-
outlet / izlaz	M22x1,5 F	-

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	PUN KAMION	20"	40"	40" HQ
	(DxŠxV) mm	(DxŠxV) mm	kg				
AR9-16.28CH PRO	830 x 595 x 640	900 x 530 x 900	66.5	4*	132	75~	156~

*Europaleta | Floor loaded / rasuto





SERIJA SA TOPLOM VODOM





AR1 - 8.16 HM
AR2 - 8.17 HM



MAX bar
160-170



MAX l/h
500



kW
2.7

AR1-8.16HM



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- 3 Axial stainless steel pistons wobble-plate pump
- Tempered stainless steel pistons
- Automatic by-pass valve with pump head pressure discharge
- Single-phase induction motor with thermal protection
- Safety pressure switch to shut down the boiler in case of lack of water
- Boiler shutdown delay control module (15866)
- Vertical boiler with double heating coil and refractory compound base
- Fuel tank capacity 14 l
- Water filter and fuel inlet filter
- Steel braided reinforced hose (8 m)
- Gear pump for diesel handling
- Independent boiler ventilation motor
- Pumpa sa 3 aksijalna klipa i oscilujućom pločom
- Klipovi od kaljenog nerđajućeg čelika
- Automatski by-pass ventil sa rasterećenjem pritiska u glavi pumpe
- Monofazni indukcioni motor sa termičkom zaštitom
- Sigurnosni presostat za gašenje kotla u slučaju nedostatka vode
- Odloženo gašenje kotla (15866)
- Vertikalni kotao, dvostruka zmija i dno od vatrostalnog materijala
- Rezervoar za dizel gorivo 14 l
- Filter vode i usisni filter dizel goriva
- Crevo ojačano čeličnim opletom (8 m)
- Zupčasta pumpa za dizel gorivo
- Nezavisni motor ventilatora kotla

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA										
		MAX	MAX						NET		
		bar	psi	l/h	gph	kW	o/min	V	Hz	°C	kg
AR1-8.16HM	15789	160	2320	500	132	2.7	2800	230 ~	50	90	65.5
AR2-8.17HM	15866	170	2465	510	134	2.8	2800	230 ~	50	90	65.5

(15789)

(15866)

HRM / HJR-Ø

- 3 Axial stainless steel pistons wobble-plate pump
- Tempered stainless steel pistons
- Brass pump head
- Integrated valve
- Automatic by-pass valve with pump head pressure discharge
- Single-phase induction motor with thermal protection
- Total Stop System for high pressure washers (TSS)
- High pressure sealing system with double seal

- Pumpa sa 3 aksijalna klipa i oscilujućom pločom
- Klipovi od kaljenog inoksa
- Glava pumpe od mesinga
- Integrirani ventil
- Automatski sigurnosni ventil sa rasterećenjem pritiska u glavi pumpe
- Monofazni indukcionni elektromotor sa termičkom zaštitom
- Trenutno potpuno zaustavljanje perača (TSS)
- Visokopritisno zaptivanje sa dvostrukom zaptivkom


TSS®
Total Stop
SYSTEM
STANDARD ACCESSORIES / SERIJSKA OPREMA

code / šifra	47209 Swivel	50690	3104 (1503)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M
outlet / izlaz	M22x1,5 F	1/4 NPT F	-

**8 m**

code / šifra	3960920	40320
inlet / ulaz	M22x1,5 F	M22x1,5 M
outlet / izlaz	M22x1,5 F	-

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	EU	PUN KAMION	20"	40"	40"HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR1-8.16HM	720 x 750 x 410	735 x 500 x 800H	72	-	-	-	-	-
AR2-8.17HM	735 x 500 x 800	720 x 750 x 410	74.5	-	-	-	-	-



AR4 - 10.16 HM

AR4 - 15.18 HT

AR4 - 15.23 HT



MAX bar
130÷200



MAX l/h
600÷900



kW
3÷7.4

AR4-15.23HT



Independent valve /
Odvojeni ventil



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Professional hot water high pressure washer
- Coated steel vertical boiler with coil burner cooling function driven by independent electric motor with thermal protection and double coil
- Safety pressure switch to shut down the boiler in case of lack of water
- Heating boiler shut-down delay circuit
- Built-in pressure adjustment
- Fuel tank (16 l)
- Thermostat
- Water filter and fuel inlet filter
- Steel braided reinforced hose
- Optional hose reel kit
- Gear pump for diesel handling
- Independent boiler ventilation motor
- Profesionalni perač pod pritiskom sa toplom vodom
- Vertikalni kotao od lakiranog čelika, sa hlađenjem gorionika pomoću ventilatora sa nezavisnim elektromotorom i dvostrukom zmijom
- Sigurnosni presostat za gašenje kotla u slučaju nedostatka vode
- Elektronika za odloženo gašenje kotla
- Regulacija pritiska
- Rezervoar za dizel gorivo 16 l
- Termostat
- Filter vode i usisni filter dizel goriva
- Crevo ojačano čeličnim opletom
- Opcioni kit motalice (RLW)
- Zupčasta pumpa za dizel gorivo
- Nezavisni motor ventilatora kotla

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA	 MAX				 MAX									 NET
		bar maks.	bar radni	psi maks.	psi radni	l/h radni	gph radni	KS	kW	kW radni	o/min	V	Hz	°C maks.	kg
AR4-10.16HM	15806	160	130	2320	1885	600	158	3	2.2	3	1450	230 ~	50	110	106
AR4-15.18HT	15807	180	150	2610	2175	900	237	5.5	4	5	1450	400 3 ~	50	110	132
AR4-15.23HT	15808	230	200	3335	2900	900	237	7.5	5.5	7.4	1450	400 3 ~	50	110	132

(15806 - 15807)

(15808)

HRC + VRC-AM / HRR + VRC-AM

- Triplex pump with ceramic pistons and connecting rod system with nichel plated pump head
- Independent valve
- Automatic by-pass valve with pump head pressure discharge
- Induction motor with thermal protection
- Time delayed auto stop/start with stop for motor overloading (TST)
- Dual pressure switch

- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, glava pumpe od niklovanog mesinga*
- *Odvojeni ventil*
 - *Automatski bypass ventil sa rasterećenjem pritiska u glavi pumpe*
 - *Indukcioni elektromotor sa termičkom zaštitom*
 - *Potpuno zaustavljanje peraća sa odlaganjem (TST)*
 - *Dvostruki presostat*



TST®
Total Stop
SYSTEM
TIMED

STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	47958 Swivel	46221	3082 (1504)	3083 (1505)	3086 (15045)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M	1/4 NPT M	1/4 NPT M
outlet / izlaz	M22x1,5 F	1/4 NPT F	-	-	-

AR4-10.16HM AR4-15.18HT AR4-15.23HT



10 m

code / šifra	3160590
inlet / ulaz	M22x1,5 F
outlet / izlaz	M22x1,5 F

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	EU	PUN KAMION	20"	40"	40"HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR4-10.16HM	1000x570x820	740x1140x1100	112	1	72	30	64	-
AR4-15.18HT	980x590x920	740x1140x1100	138	1	72	30	64	-
AR4-15.23HT	980x590x920	740x1140x1100	138	1	72	30	64	-



AR5 - 15.18 HT
 AR5 - 15.23 HT
 AR5 - 15.23 HT*
 AR5 - 21.18 HT



MAX bar
180÷230



MAX l/h
900÷1260



kW
5.0÷7.4



Flanged pressure unloader /
 Prirubnički regulacioni ventil

AR5-21.18HT



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Professional hot water high pressure washer
- Stainless steel vertical boiler with coil burner cooling function driven by independent motor with thermal protection and double coil
- Safety pressure switch to shut down the boiler in case of lack of water
- Minor leak PCB detector with buzzer
- Heating boiler shut-down delay circuit
- Built-in pressure adjustment
- Fuel tank with drain plug (15 l)
- Thermostat
- Built-in detergent tank (6 l)
- Water filter and fuel inlet filter
- Steel braided reinforced hose (10 m)
- Anti-limescale device (1 L), optional
- Flame control (optional)
- Independent boiler ventilation motor
- Profesionalni perlač pod pritiskom sa toplom vodom
- Vertikalni kotao od inoksa, sa hlađenjem gorionika pomoću ventilatora sa nezavisnim elektromotorom i dvostrukom zmijom
- Sigurnosni presostat za gašenje kotla u slučaju nedostatka vode
- Detekcija mikrocurenja sa zvučnim signalom
- Elektronika za odloženo gašenje kotla
- Regulacija pritiska
- Rezervoar za dizel gorivo 15 l, sa ispusnim čepom
- Termostat
- Ugrađeni rezervoar za deterdžent 6 l
- Filter vode i usisni filter dizel goriva
- Crevo ojačano čeličnim opletom (10 m)
- Uređaj protiv kamenca (1 l), (opciono)
- Kontrola plamena (opciono)
- Nezavisni motor ventilatora kotla

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA	 MAX				 MAX									 KG NET
		bar maks.	bar radni	psi maks.	psi radni	l/h radni	gph radni	KS	kW	kW radni	o/min	V	Hz	°C maks.	kg
AR5-15.18HT	15809	180	150	2610	2175	900	237	5.5	4	5	1450	400 3 ~	50	110	132
AR5-15.23HT	15810	230	200	3335	2900	900	237	7.5	5.5	7.4	1450	400 3 ~	50	110	139
AR5-15.23HT*	15906	230	200	3335	2900	900	237	7.5	5.5	7.4	1450	400 3 ~	50	110	140.5
AR5-21.18HT	15811	180	150	2610	2175	1260	332	7.5	5.5	7.4	1450	400 3 ~	50	110	167

*AR5-15.23HT On request / Na zahtev



(15809)

(15810 - 15811)

(15906*)

HRC+VRZ / HRR + VRZ / HJK + VRZ

- Triplex pump with ceramic pistons and connecting rod system with nickel plated pump head
- Flanged valve
- Automatic by-pass valve with pump head pressure discharge
- Induction motor with thermal protection
- Time delayed auto stop/start with stop for motor overloading (TST)

- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, glava pumpe od niklovanog mesinga
- Prirubnički ventil
- Automatski bypass ventil sa rasterećenjem pritiska u glavi pumpe
- Indukcioni elektromotor sa termičkom zaštitom
- Potpuno zaustavljanje sa odlaganjem perača (TST)

*15906 On request / Na zahtev



TST®
Total Stop
SYSTEM
TIMED

STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	47684 Swivel	46221	3083 (1505)	3086 (15045)	3157 (1508)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M	1/4 NPT M	1/4 NPT M
outlet / izlaz	M22x1,5 F	1/4 NPT F	-	-	-

AR5-15.18HT AR5-15.23HT AR5-21.18HT



10 m

code / šifra	3160590
inlet / ulaz	M22x1,5 F
outlet / izlaz	M22x1,5 F

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	EU	PUN KAMION	20"	40"	40"HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR5-15.18HT	980x590x920	740x1140x1100	138	1	72	30	64	-
AR5-15.23HT	980x590x920	740x1140x1100	145	1	72	30	64	-
AR5-15.23HT*	980x590x920	740x1140x1100	146.5	1	72	30	64	-
AR5-21.18HT	1100x700x1040	740x1140x1140	173	1	72	30	64	-



AR6 - 15.23 HT

AR6 - 21.18 HT

AR6 - 21.23 HT



MAX bar
180÷280



MAX l/h
900÷1260



kW
7.4÷9.3



Flanged pressure unloader /
Prirubnički regulacioni ventil

AR6-21.23HT



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Professional hot water high pressure washer
- Stainless steel vertical boiler with coil burner cooling function driven by independent motor and double coil
- Safety pressure switch to shut down the boiler in case of lack of water
- Minor leak PCB detector with buzzer
- Heating boiler shut-down delay circuit
- Built-in pressure adjustment
- Fuel tank with drain plug (24 l)
- Thermostat
- Built-in detergent suction
- Built-in detergent tank (8 l)
- Water filter and fuel inlet filter
- Double steel braided reinforced hose (10 m)
- Flame monitoring sensor
- Water tank (4 l)
- Independent boiler ventilation motor
- Profesionalni perač pod pritiskom sa toplom vodom
- Vertikalni kotao od inoksa, sa hlađenjem gorionika pomoću ventilatora sa nezavisnim elektromotorom i dvostrukom zmijom
- Sigurnosni presostat za gašenje kotla u slučaju nedostatka vode
- Detekcija mikrocurenja sa zvučnim signalom
- Elektronika za odloženo gašenje kotla
- Regulacija pritiska
- Rezervoar za dizel gorivo 24 l, sa ispusnim čepom
- Termostat
- Ugrađeno usisavanje deterdženta sa rezervoarom (8 l)
- Filter vode i usisni filter dizel goriva
- Crevo ojačano dvostrukim čeličnim opletom (10 m)
- Senzor kontrole plamena
- Posuda za vodu (4 l)
- Nezavisni motor ventilatora kotla

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA	 MAX				 MAX									 NET
		bar maks.	bar radni	psi maks.	psi radni	l/h radni	gph radni	KS	kW	kW radni	o/min	V	Hz	°C maks.	kg
AR6-15.23HT	15905	230	200	3335	2900	900	332	7.5	5.5	7.4	1450	400 3~	50	110	174
AR6-21.18HT	15813	180	150	2610	2175	1260	332	7.5	5.5	7.4	1450	400 3~	50	110	156
AR6-21.23HT	15812	230	200	3335	2900	1260	332	9.6	7	9.3	1450	400 3~	50	110	160

HJK + VRZ

- Triplex pump with ceramic pistons and connecting rod system with brass pump head
- Flanged valve
- Automatic by-pass valve with pump head pressure discharge
- Induction motor with thermal protection
- Time delayed auto stop/start with stop for motor overloading (TST)
- Dual pressure switch
- Pumpa sa 3 keramička klipa, klipnjačno-kolenasti pogon, glava pumpe od mesinga
- Prirubnički ventil
- Automatski bypass ventil sa rasterećenjem pritiska u glavi pumpe
- Indukcioni elektromotor sa termičkom zaštitom
- Potpuno zaustavljanje sa odlaganjem perača (TST)
- Dvostruki presostat



TST®
Total Stop
SYSTEM
TIMED

STANDARD ACCESSORIES / SERIJSKA OPREMA



code / šifra	47684 Swivel	46221	3157 (1508)	3153 (15065)
inlet / ulaz	M22x1,5 M 14 mm	M22x1,5 M	1/4 NPT M	1/4 NPT M
outlet / izlaz	M22x1,5 F	1/4 NPT F	-	-
			AR6-21.18HT	AR6-21.23HT



10 m


code / šifra	6220020
inlet / ulaz	M22x1,5 F
outlet / izlaz	M22x1,5 F

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	EU	PUN KAMION	20"	40"	40"HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR6-15.23HT	1100x700x1040	740x1140x1140	173	1	72	30	64	-
AR6-21.18HT	1100x700x1040	740x1140x1140	173	1	72	30	64	-
AR6-21.23HT	1100x700x1040	740x1140x1140	180	1	72	30	64	-

JK PREMIUM SERIES

- 1** Premium quality tapered roller bearings.
/ Konusni valjkasti ležajevi Premium kvaliteta.
- 2** Connecting rods in a special bronze alloy with excellent low-friction and mechanical performances.
/ Klipnjače od specijalne bronzane legure sa odličnim antifrikcionim i mehaničkim svojstvima.
- 3** Nickel-plated brass pump head for extra protection against chemicals.
/ Glava od niklovanog mesinga za veću otpornost na hemikalije.
- 4** Crankcase in pressure die-cast aluminium alloy with anti-corrosion powder coating
/ Kućište od livene aluminijumske legure sa praškastim premazom za veću otpornost na koroziju.
- 5** Extended back cover to contain a larger amount of oil and ensure a better lubrication.
/ Uvećani zadnji poklopac za veću količinu ulja, čime se obezbeđuje bolje podmazivanje.
- 6** Magnetic oil discharge cap to attract all microscopic metal particles arising from heavy duty usage.
/ Magnetni čep za ispuštanje ulja koji sakuplja metalne čestice nastale habanjem pokretnih mehaničkih delova.
- 7** Ceramic plungers.
/ Keramički klipovi.
- 8** Special machining of plunger guides to reduce the risk of oil leaks.
/ Posebna obrada vođica klipova radi smanjenja rizika od curenja ulja.
- 9** Long life double sealing system to ensure longer service life and prevent water leakage.
/ Dvostruka Long Life zaptivka za duži vek trajanja i sprečavanje curenja vode.

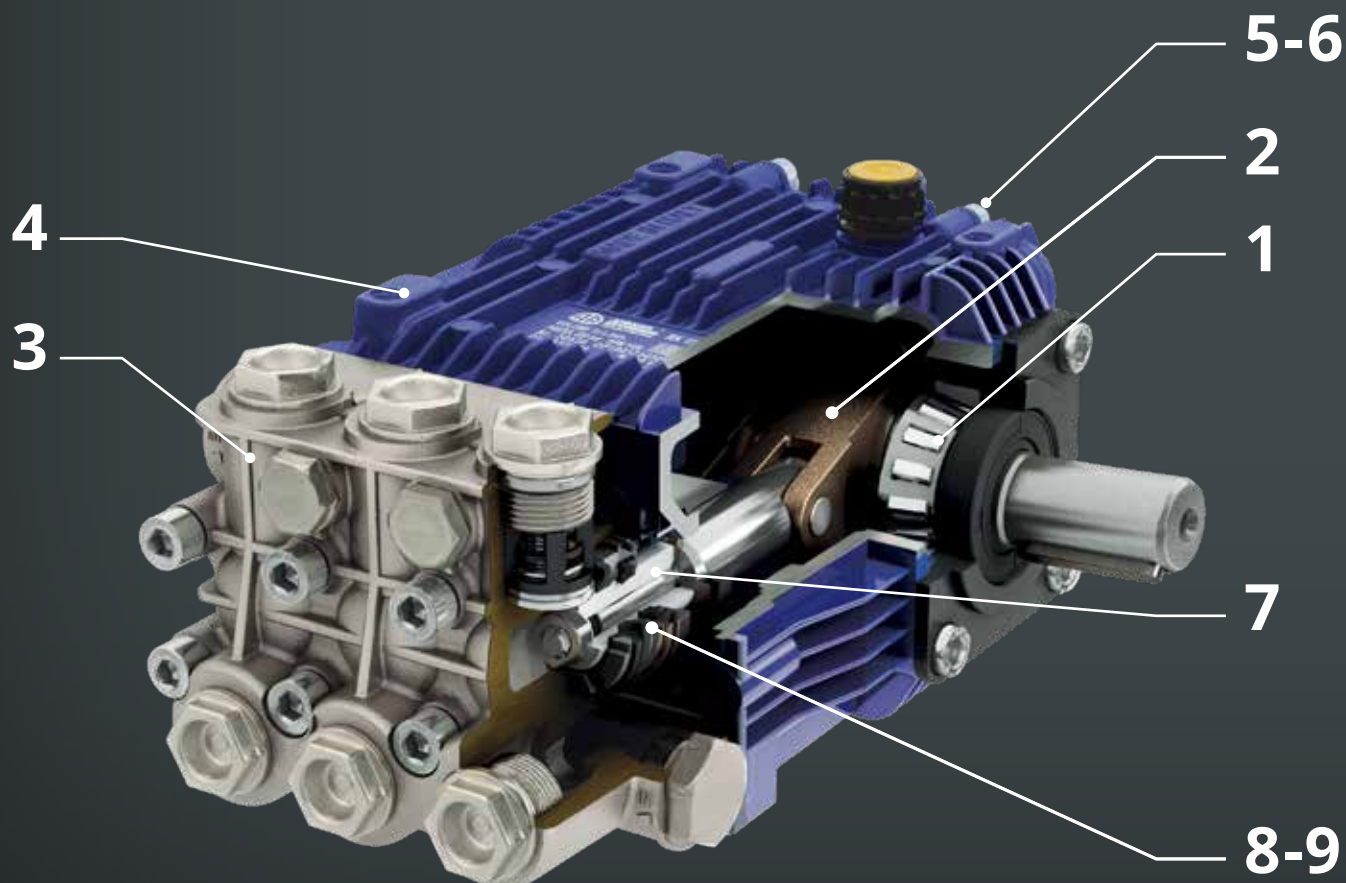



DODATNA OPREMA



STANDARD & OPTIONAL ACCESSORIES

MODEL	OPIS	AR ŠIFRA																																	
			AR1-8.17CM	AR1-10.19CMH	AR2-8.16CMK	AR2-10.15CM	AR2-10.15CMK	AR3-10.16CM	AR3-10.16CMH	AR3-14.20CT	AR3-14.20CTH	AR5-10.15CM	AR5-15.18CT	AR5-15.23CT	AR5-21.18CT	AR5-21.23CT	AR8-10.15CMW HW	AR8-14.20CTW HW	AR9-12.22CL	AR9-12.22CH	AR9-16.28CL	AR9-16.28CH PRO	AR1-8.16HM	AR2-8.17HM	AR4-10.16HM	AR4-15.18HT	AR4-15.23HT	AR5-15.18HT	AR5-15.23HT *	AR5-21.18HT	AR6-15.23HT	AR6-21.18HT	AR6-21.23HT		
	Trigger gun / Pištolj	48145	S	S																															
		47209			S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S											
		47958																								S	S	S							
		47684																											S	S	S	S	S	S	
	Lance extension / Produžetak koplja	48158	S	S																															
		50690						S	S	S	S													S	S										
		46221											S	S	S	S	S			S	S	S	S			S	S	S	S	S	S	S	S	S	
	Lance with adjustable spray nozzle / Koplje sa podesivim mlazom	47078															S	S																	
		46814			S																														
		47748				S	S																												
	Adjustable nozzle head / Podesiva glava mlaza	48146	S																																
		48147		S																															
	Rotary nozzle head / Rotirajuća glava mlaza	48149	S																																
		48148		S																															
	Rotary lance / Koplje sa rotirajućim mlazom	40899			O																														
		40638				O	O																												
		40964						O	O									O	O			O	O	O			O								
		40803								O	O		O	O														O		O		O			
		41050																						O	O										
		40968										O								O	O														
		40966																									O		O						
		40965																																	O
		46638															O																		
		40967													O																O		O		
		Lance without nozzle / Koplje bez dizne	40652	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	40653		O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	
	40654		O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	
	40694		O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	
	40695		O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	
	Double lance / Dvostruko koplje	3160620					O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	
	Lance with steam nozzle / Koplje sa diznom za paru	47796																						O	O	O	O	O	O	O	O	O	O	O	

*AR5-15.23HT (JK) cod. 15906 same compatibility of 15810
/ *AR5-15.23HT (JK) šif. 15906 – ista kompatibilnost kao 15810

SERIJSKA I DODATNA OPREMA

MODEL	OPIS	AR ŠIFRA																																			
			AR1-8.17CM	AR1-10.19CMH	AR2-8.16CMK	AR2-10.15CM	AR2-10.15CMK	AR3-10.16CM	AR3-10.16CMH	AR3-14.20CT	AR3-14.20CTH	AR5-10.15CM	AR5-15.18CT	AR5-15.23CT	AR5-21.18CT	AR5-21.23CT	AR8-10.15CMW HW	AR8-14.20CTW HW	AR9-12.22CL	AR9-12.22CH	AR9-16.28CL	AR9-16.28CL	AR9-16.28CH PRO	AR1-8.16HM	AR2-8.17HM	AR4-10.16HM	AR4-15.18HT	AR4-15.23HT	AR5-15.18HT	AR5-15.23HT *	AR5-21.18HT	AR6-15.23HT	AR6-21.18HT	AR6-21.23HT			
	Lance with double nozzle holder / Koplje sa dvostrukim držačem dizni	48088						O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O		
	Trigger gun with quick coupling / Pištolj sa brzom spojnicom	46483						O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O		
	Quick coupling kit / Kit brze spojnice	48130						O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O		
	Wash nozzles 1/4 MEG / Dizne	3251 (2525)						O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O			
		3076 (0004)						O	O									O	O			O	O	O			O										
		3082 (1504)						S	S									S	S			S	S	S			S										
		3087 (2504)						O	O									O	O			O	O	O			O										
		3097 (4004)						O	O									O	O			O	O	O			O										
		3100 (6504)						O	O									O	O			O	O	O			O										
		3077 (0005)																										O		O							
		3083 (1505)																										S		S							
		3088 (2505)																										O		O							
		3080 (00045)								O	O		O	O														O		O		O		O			
		3086 (15045)								S	S		S	S														S		S		S					
		3091 (25045)								O	O		O	O														O		O		O					
		3099 (40045)								O	O		O	O														O		O		O					
		3075 (0003)																							O	O											
		3104 (1503)																								S	S										
		3106 (2503)																								O	O										
		3113 (0008)													O																O		O		O		
		3157 (1508)													O																S		S		S		
		3074 (2508)													O																O		O		O		
		3160 (00035)										O								O	O															O	
		3195 (15035)										S								S	S																
		52074 (25035)										O								O	O																
		3081 (00065)																O																			
		3153 (15065)																S																			
		3152 (25065)																O																			
		3078 (0006)																																			O
		3084 (1506)																																			S
		3089 (2506)																																			O
		3253 (4006)																																			O



STANDARD & OPTIONAL ACCESSORIES

MODEL	OPIS	AR ŠIFRA																																						
			AR1-8.17CM	AR1-10.19CMH	AR2-8.16CMK	AR2-10.15CM	AR2-10.15CMK	AR3-10.16CM	AR3-10.16CMH	AR3-14.20CT	AR3-14.20CTH	AR5-10.15CM	AR5-15.18CT	AR5-15.23CT	AR5-21.18CT	AR5-21.23CT	AR8-10.15CMW HW	AR8-14.20CTW HW	AR9-12.22CL	AR9-12.22CH	AR9-16.28CL	AR9-16.28CH PRO	AR1-8.16HM	AR2-8.17HM	AR4-10.16HM	AR4-15.18HT	AR4-15.23HT	AR5-15.18HT	AR5-15.23HT *	AR5-21.18HT	AR6-15.23HT	AR6-21.18HT	AR6-21.23HT							
	Reinforced Hose HP / Ojačano VP crevo	3083830	S																																					
		4581170	S																																					
	Hose HP / VP crevo	3960970		S	S	S													S	S																				
		3083550					S	S	S	S																														
		3961050										S	S	S	S	S																								
		4001180																				S	S	S																
		5640190															S	S																						
		3960920																						S	S															
		3160590																								S	S	S	S	S	S									
		6220020																									S	S	S	S			S	S	S					
	Reinforced extension hose / Produžno ojačano crevo	46582 (200 bar) (10 m)	O	O																																				
		40106 (250 bar) (15 m)	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O			O	O						O	O	O	O	O	O	O	O	O					
		46850 (400 bar) (15 m)																				O	O	O				O	O	O	O	O	O	O	O	O				
		40641 (210 bar) (15 m)																							O	O	O													
		48089 (290 bar) (10 m)	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O																
	Non marking extension hose / Produžno crevo bez tragova	48090 (240 bar) (10 m)															O	O																						
 	High pressure foam lance bottle / Visokopritisna penilica	4581160	S	S																																				
		51486	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O						
		46875	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O					

SERIJSKA I DODATNA OPREMA

MODEL	OPIS	AR ŠIFRA																																	
			AR1-8.17CM	AR1-10.19CMH	AR2-8.16CMK	AR2-10.15CM	AR2-10.15CMK	AR3-10.16CM	AR3-10.16CMH	AR3-14.20CT	AR3-14.20CTH	AR5-10.15CM	AR5-15.18CT	AR5-15.23CT	AR5-21.18CT	AR5-21.23CT	AR8-10.15CMW HW	AR8-14.20CTW HW	AR9-12.22CL	AR9-12.22CH	AR9-16.28CL	AR9-16.28CL	AR9-16.28CH PRO	AR1-8.16HM	AR2-8.17HM	AR4-10.16HM	AR4-15.18HT	AR4-15.23HT	AR5-15.18HT	AR5-15.23HT *	AR5-21.18HT	AR6-15.23HT	AR6-21.18HT	AR6-21.23HT	
	Foam lance / Koplje za penu	40320																					S												
	Water filter / Filter za vodu	3082130	S	S	S	S	S												S	S	S	S	S												
		1340260						S	S	S	S																								
		41807						O	O	O	O	S	S	S	S	S																			
		41593	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	Y water filter / Y filter za vodu	51702															S	S																	
	PRO Descaling Filter / Filter protiv kamenca	48091	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	Transparent cup / Providna posuda	53127	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	Polyphosphate filter cartridge / Uložak sa polifosfatom	53128	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	Brass click fast / Mesingana brza spojnica	40439	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	throttle control / Automatski regulator gasa	51534																	O	O	S	S	S												
	Detergent suction kit / Kit za usisavanje deterdženta	47497			O	O																				O	O	O							
		47791						O	O	O	O						O	O							O	O	O	O	O						



STANDARD & OPTIONAL ACCESSORIES

MODEL	OPIS	AR ŠIFRA																																						
			AR1-8.17CM	AR1-10.19CMH	AR2-8.16CMK	AR2-10.15CM	AR2-10.15CMK	AR3-10.16CM	AR3-10.16CMH	AR3-14.20CT	AR3-14.20CTH	AR5-10.15CM	AR5-15.18CT	AR5-15.23CT	AR5-21.18CT	AR5-21.23CT	AR8-10.15CMW HW	AR8-14.20CTW HW	AR9-12.22CL	AR9-12.22CH	AR9-16.28CL	AR9-16.28CL	AR9-16.28CH PRO	AR1-8.16HM	AR2-8.17HM	AR4-10.16HM	AR4-15.18HT	AR4-15.23HT	AR5-15.18HT	AR5-15.23HT *	AR5-21.18HT	AR6-15.23HT	AR6-21.18HT	AR6-21.23HT						
	Pipe drain kit / Kit za čišćenje cevi	46363						O	O	O	O													O	O	O	O	O	O	O		O		O						
		46364	O	O	O	O	O					O	O	O	O		O	O	O	O	O	O	O								O									
		46365															O																	O						
		1344130	O	O	O	O	O					O	O	O	O		O	O	O	O	O	O	O								O									
		1272530						O	O	O	O														O	O	O	O	O	O			O		O					
		46367															O																							
	Patio cleaner / Podesivi čistač podova	46359	O	O																																				
	Patio cleaner w. pressure adjustment / Čistač podova PRO sa regulacijom pritiska	46368	O	O	O																			O	O															
		46369				O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O			O							O							
	Sandblasting lance kit PRO / Koplje za peskarenje PRO	41591 (50 cm)			O																			O																
		41762 (50 cm)	O	O		O	O	O	O	O	O	O		O				O	O	O	O	O	O	O			O		O	O	O		O							
		41763 (50 cm)												O		O	O															O		O	O					
	Sandblasting nozzle / Dizna za peskarenje	3067			O																			O																
		3068	O	O		O	O	O	O	O	O	O		O						O	O	O	O	O			O		O	O	O		O							
		3069												O			O											O		O	O		O	O	O					

SERIJSKA I DODATNA OPREMA

MODEL	OPIS	AR ŠIFRA																																	
			AR1-8.17CM	AR1-10.19CMH	AR2-8.16CMK	AR2-10.15CM	AR2-10.15CMK	AR3-10.16CM	AR3-10.16CMH	AR3-14.20CT	AR3-14.20CTH	AR5-10.15CM	AR5-15.18CT	AR5-15.23CT	AR5-21.18CT	AR5-21.23CT	AR8-10.15CMW HW	AR8-14.20CTW HW	AR9-12.22CL	AR9-12.22CH	AR9-16.28CL	AR9-16.28CH PRO	AR1-8.16HM	AR2-8.17HM	AR4-10.16HM	AR4-15.18HT	AR4-15.23HT	AR5-15.18HT	AR5-15.23HT *	AR5-21.18HT	AR6-15.23HT	AR6-21.18HT	AR6-21.23HT		
	Self priming kit / Kit za samousisavanje To use with 3251 nozzle / za upotrebu sa diznom 3251	47332	O	O	O	O	O																												
		47333						O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	
	Exhaust extension / Produžetak dimnjaka	3161390																							O	O		O	O	O	O	O	O	O	
	Flame monitoring kit / Kit kontrole plamena	48094																										O	O	O	O	O	O	O	
	Anti-scale kit with tank / Kit protiv kamenca sa posudom	51032																														O	O	O	
		41738		O	O	O																													
	Hose reel kit without hose /Kit RLW bez creva	48022					O		O																										
		50977																						O	O										
		40839																								O	O	O							
		40840																										O	O	O	O	O	O	O	O
	Hose reel kit with hose /Kit RLW sa creva	41879		O	O	O																													
		48025					O		O																										
	Stainless steel coil / Inox zmija	6220050																												O	O				
		6220060																															O	O	
	Kart kit / Kit kolica	47934			S	O	S																												
	Wall mounted hose reel without hose kit / Kit zidne motalice bez creva	47704				O	O																												
	Wall mounted hose reel with hose 15 m / Kit zidne motalice sa crevom 15 m	47705				O	O																												

PROFESIONALNI USISIVACI ZA SUVO I MOKRO USISAVANJE

POUZDANO. SNAŽNO. PROFESIONALNO.

The AR Professional Wet & Dry vacuum cleaners range delivers high suction performance for both solids and liquids, combining power, reliability, and robust construction. Designed for continuous professional use, these vacuum cleaners ensure operational efficiency, ease of maintenance, and long service life, meeting the needs of industrial, craft, and commercial environments.

Asortiman usisivača Wet & Dry AR Professional pruža visoke performanse usisavanja čvrstih materija i tečnosti, spajajući snagu, pouzdanost i robusnu konstrukciju. Projektovani za kontinuiranu profesionalnu upotrebu, usisivači garantuju efikasan rad, lako održavanje i dug vek trajanja, ispunjavajući zahteve industrijskih, zanatskih i komercijalnih okruženja.



PROIZVEDENO U ITALIJI

The AR Professional Wet & Dry range is entirely designed and manufactured in Italy, ensuring high quality standards and strict control over every stage of the production process. Italian engineering, careful material selection, and thorough testing guarantee consistent performance, reliability, and long-lasting durability.

Asortiman AR Professional Wet & Dry u potpunosti je projektovan i proizveden u Italiji, što garantuje visoke standarde kvaliteta i strogu kontrolu svake faze proizvodnog procesa. Italijanski inženjering, pažljiv izbor materijala i temeljna testiranja obezbeđuju postojane performanse, pouzdanost i dugotrajnost.



USISIVAČI ZA SUVO I MOKRO



PROFESSIONAL
AR2-V65BXHDL



AR1 - V22 BX



MOTORI
1



MAX W
1100



lt
22

AR1-V22BX



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Professional dust and liquid vacuum cleaner
- Stainless steel tank
- Antistatic
- Two-stage motor
- Ideal for cleaning in tight spaces
- Float switch to cut out suction when tank is full
- Quick connection/release metal hinges for filter and tank cleaning
- Kink-resistant suction hose
- Pivoting wheels
- *Kompaktni profesionalni model za usisavanje prašine i tečnosti*
- *Posuda od nerđajućeg čelika*
- *Antistatički*
- *Dvostepeni motor*
- *Idealan za čišćenje u skučenom prostoru*
- *Plovak koji prekida usisavanje kada je posuda puna*
- *Metalne kopče za brzo otvaranje radi čišćenja filtera i posude*
- *Usisno crevo otporno na uvijanje*
- *Okretni točkovi*

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA											
		K ^P A	l/s	N°	Stepeni STAGES	W(Maks)	W	Hz	V	dB(A)	l	kg
AR1-V22BX	54007	21	52	1	2	1100	1000	50 - 60	220-240~	70	22	9

PRODUCT DETAILS / DETALJI PROIZVODA



Quick connection/release metal hinges for filter and tank cleaning
/ Metalne kopče za brzo otvaranje radi čišćenja filtera i posude



4 stable castor wheels
/ 4 stabilna okretna točka



Motor selector
/ Birač motora

STANDARD ACCESSORIES / SERIJSKA OPREMA



2,5 m



0,5 m x 2



code / šifra	6520010 + 6520130	6520030	6520070	6020050
Ø mm	Ø 35 mm	Ø 35 mm	Ø 35 mm	Ø 35 mm



code / šifra	6520110	6520090	6520190	6520180
Ø mm	Ø 35 mm	Ø 35 mm		

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	EU	PUN KAMION	20"	40"	40" HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR1-V22BX	430x415x640	430x430x640	13	18	360	195	405	405



AR1 - V35 BX



MOTORI
1



MAX W
1100



lt
35

AR1-V35BX



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Professional dust and liquid vacuum cleaner
- Stainless steel tank
- Antistatic
- Two-stage motor
- Ideal for cleaning in tight spaces
- Float switch to cut out suction when tank is full
- Quick connection/release metal hinges for filter and tank cleaning
- Kink-resistant suction hose
- Pivoting wheels
- *Kompaktni profesionalni model za usisavanje prašine i tečnosti*
- *Posuda od nerđajućeg čelika*
- *Antistatički*
- *Dvostepeni motor*
- *Idealan za čišćenje u skučenom prostoru*
- *Plovak koji prekida usisavanje kada je posuda puna*
- *Metalne kopče za brzo otvaranje radi čišćenja filtera i posude*
- *Usisno crevo otporno na uvijanje*
- *Okretni točkovi*

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA											
		K ^p A	l/s	N°	Stepeni STAGES	W(Maks)	W	Hz	V	dB(A)	l	kg
AR1-V35BX	54008	21	52	1	2	1100	1000	50-60	220-240 ~	70	35	10

PRODUCT DETAILS / DETALJI PROIZVODA



Quick connection/release metal hinges for filter and tank cleaning
/ Metalne kopče za brzo otvaranje radi čišćenja filtera i posude



4 stable castor wheels
/ 4 stabilna okretna točka



Motor selector
/ Birač motora

STANDARD ACCESSORIES / SERIJSKA OPREMA



2,5 m



0,5 m x 2



code / šifra	6520020 + 6520140	6520040	6520060	6520080
Ø mm	Ø 38 mm	Ø 38 mm	Ø 38 mm	Ø 38 mm



code / šifra	6520120	6520090	6520190	6520180
Ø mm	Ø 38 mm	Ø 38 mm		

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	EU	PUN KAMION	20"	40"	40" HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR1-V35BX	435x455x760	-	14	15	360	195	405	405



AR1 - V35 BP



MOTORI
1



MAX W
1100



lt
35

AR1-V35BP



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Professional dust and liquid vacuum cleaner series
- Polypropylene tank
- Two-stage motor
- Ideal for cleaning in tight spaces
- Float switch to cut out suction when tank is full
- Quick connection/release metal hinges for filter and tank cleaning
- Kink-resistant suction hose
- Pivoting wheels

- *Kompaktna profesionalna serija za usisavanje prašine i tečnosti*
- *Posuda od polipropilena*
- *Dvostepeni motor*
- *Idealan za čišćenje u skučenom prostoru*
- *Plovak koji prekida usisavanje kada je posuda puna*
- *Metalne kopče za brzo otvaranje radi čišćenja filtera i posude*
- *Usisno crevo otporno na uvijanje*
- *Okretni točkovi*

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA											
		K ^p A	l/s	N°	Stepeni STAGES	W(Maks)	W	Hz	V	dB(A)	l	kg
AR1-V35BP	54009	21	52	1	2	1100	1000	50-60	220-240~	70	35	9

PRODUCT DETAILS / DETALJI PROIZVODA



Quick connection/release metal hinges for filter and tank cleaning
/ Metalne kopče za brzo otvaranje radi čišćenja filtera i posude



4 stable castor wheels
/ 4 stabilna okretna točka



Motor selector
/ Birač motora

STANDARD ACCESSORIES / SERIJSKA OPREMA



2,5 m



0,5 m x 2



code / šifra	6520020 + 6520140	6520040	6520060	6520080
Ø mm	Ø 38 mm	Ø 38 mm	Ø 38 mm	Ø 38 mm



code / šifra	6520120	6520090	6520190	6520180
Ø mm	Ø 38 mm	Ø 38 mm		

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	EU	PUN KAMION	20"	40"	40" HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR1-V35BP	435x455x760	-	13	15	360	195	405	405



AR2 - V65 BPHD
AR3 - V65 BPHD



MOTORI
2÷3



MAX W
2200÷3300

lt
65



AR2-V65BPHD



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Professional dust and liquid vacuum cleaner
- Polypropylene tank
- High efficiency motors
- Float switch to cut out suction when tank is full
- Quick connection/release metal hinges for filter and tank cleaning
- Folding handle
- Integrated drainage system
- Kink-resistant suction hose
- Enlarged rear wheels
- No markings front pivoting wheels
- Built-in accessory holder
- Drain systems
- Flexible hose for liquid discharges
- Kompaktni profesionalni model za usisavanje prašine i tečnosti
- Posuda od polipropilena
- Motori visoke efikasnosti
- Plovak koji prekida usisavanje kada je posuda puna
- Metalne kopče za brzo otvaranje radi čišćenja filtera i posude
- Preklopna drška
- Integrirani sistem za ispuštanje
- Usisno crevo otporno na uvijanje
- Veći zadnji točkovi
- Prednji okretni točkovi bez tragova
- Integrirani držač pribora
- Funkcija ispuštanja
- Fleksibilno crevo za ispuštanje tečnosti

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA											
		K ^P A	l/s	N°	Stepeni STAGES	W(Maks)	W	Hz	V	dB(A)	l	kg
AR2-V65BPHD	54010	21	104	2	2	2200	2000	50-60	220-240 ~	72	65	21
AR3-V65BPHD	54011	21	147	3	2	3300	3000	50-60	220-240 ~	72	65	23

PRODUCT DETAILS / DETALJI PROIZVODA



Quick connection/release metal hinges for filter and tank cleaning
/ Metalne kopče za brzo otvaranje radi čišćenja filtera i posude



2 stable castor wheels
/ 2 stabilna okretna točka



Flexible hose for liquid discharges
/ Fleksibilno crevo za ispuštanje tečnosti



Tilting tank with quick connect/release system for easy emptying
/ Nagibna posuda sa brzim otpuštanjem za lako pražnjenje

STANDARD ACCESSORIES / SERIJSKA OPREMA



2,5 m



0,5 m x 2



code / šifra	6520020 + 6520140	6520040	6520060	6520080
Ø mm	Ø 38 mm	Ø 38 mm	Ø 38 mm	Ø 38 mm



code / šifra	6520120	6520090	6520190	6520180
Ø mm	Ø 38 mm	Ø 38 mm		

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	EU	PUN KAMION	20"	40"	40" HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR2-V65BPHD	655x560x102	-	25	3	160	64	144	144
AR3-V65BPHD	655x560x102	-	27	3	160	64	144	144



AR2 - V65 BPHT
AR3 - V65 BPHT



MOTORI
2÷3



MAX W
2200÷3300

lt
65



AR2-V65BPHT



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Professional dust and liquid vacuum cleaner
- Polypropylene tank
- High efficiency motors
- Float switch to cut out suction when tank is full
- Quick connection/release metal hinges for filter and tank cleaning
- Folding handle
- Integrated drainage system
- Kink-resistant suction hose
- Enlarged rear wheels
- No markings front pivoting wheels
- Built-in accessory holder
- Drain systems
- Kompaktni profesionalni model za usisavanje prašine i tečnosti
- Posuda od polipropilena
- Motori visoke efikasnosti
- Plovak koji prekida usisavanje kada je posuda puna
- Metalne kopče za brzo otvaranje radi čišćenja filtera i posude
- Preklopna drška
- Integrirani sistem za ispuštanje
- Usisno crevo otporno na uvijanje
- Veći zadnji točkovi
- Prednji okretni točkovi bez tragova
- Integrirani držač pribora
- Funkcija ispuštanja

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA											
		K ^P A	l/s	N°	Stepeni STAGES	W(Maks)	W	Hz	V	dB(A)	l	kg
AR2-V65BPHT	54012	21	104	2	2	2200	2000	50-60	220-240 ~	72	65	21
AR3-V65BPHT	54013	21	147	3	2	3300	3000	50-60	220-240 ~	73	65	23

PRODUCT DETAILS / DETALJI PROIZVODA



Quick connection/release metal hinges for filter and tank cleaning
/ Metalne kopče za brzo otvaranje radi čišćenja filtera i posude



2 stable castor wheels
/ 2 stabilna okretna točka



Motor selector
/ Birač motora



Tilting tank with quick connect/release system for easy emptying
/ Nagibna posuda sa brzim otpuštanjem za lako pražnjenje

STANDARD ACCESSORIES / SERIJSKA OPREMA



2,5 m



0,5 m x 2



code / šifra	6520020 + 6520140	6520040	6520060	6520080
Ø mm	Ø 38 mm	Ø 38 mm	Ø 38 mm	Ø 38 mm



code / šifra	6520120	6520090	6520190	6520180
Ø mm	Ø 38 mm	Ø 38 mm		

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	EU	PUN KAMION	20"	40"	40" HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR2-V65BPHT	655x560x102	-	25	3	160	64	144	144
AR3-V65BPHT	655x560x102	-	27	3	160	64	144	144



AR2 - V65 BXHT
AR3 - V65 BXHT



MOTORI
2÷3



MAX W
2200÷3300

lt
65



AR2-V65BXHT



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Professional dust and liquid vacuum cleaner
- Stainless steel tank
- High efficiency motors
- Float switch to cut out suction when tank is full
- Quick connection/release metal hinges for filter and tank cleaning
- Folding handle
- Tilting tank
- Integrated drainage system
- Kink-resistant suction hose
- Enlarged rear wheels
- No markings front pivoting wheels
- Built-in accessory holder
- Drain systems
- Kompaktni profesionalni model za usisavanje prašine i tečnosti
- Posuda od nerđajućeg čelika
- Motori visoke efikasnosti
- Plovak koji prekida usisavanje kada je posuda puna
- Metalne kopče za brzo otvaranje radi čišćenja filtera i posude
- Preklopna drška
- Nagibna posuda
- Integrirani sistem za ispuštanje
- Usisno crevo otporno na uvijanje
- Veći zadnji točkovi
- Prednji okretni točkovi bez tragova
- Integrirani držač pribora
- Funkcija ispuštanja

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA											
		K ^P A	l/s	N°	Stepeni STAGES	W(Maks)	W	Hz	V	dB(A)	l	kg
AR2-V65BXHT	54014	21	104	2	2	2200	2000	50-60	220-240 ~	72	65	23
AR3-V65BXHT	54015	21	147	3	2	3300	3000	50-60	220-240 ~	73	65	25

PRODUCT DETAILS / DETALJI PROIZVODA



Quick connection/release metal hinges for filter and tank cleaning
/ Metalne kopče za brzo otvaranje radi čišćenja filtera i posude



2 stable castor wheels
/ 2 stabilna okretna točka



Motor selector
/ Birač motora



Tilting tank with quick connect/release system for easy emptying
/ Nagibna posuda sa brzim otpuštanjem za lako pražnjenje

STANDARD ACCESSORIES / SERIJSKA OPREMA



2,5 m



0,5 m x 2



code / šifra	6520020 + 6520140	6520040	6520060	6520080
Ø mm	Ø 38 mm	Ø 38 mm	Ø 38 mm	Ø 38 mm



code / šifra	6520120	6520090	6520190	6520180
Ø mm	Ø 38 mm	Ø 38 mm		

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	EU	PUN KAMION	20"	40"	40" HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR2-V65BXHT	655x560x102	-	27	3	160	64	144	144
AR3-V65BXHT	655x560x102	-	29	3	160	64	144	144



AR2 - V65 BXHDL



MOTORI
2



MAX W
2200



lt
65

AR2-V65BXHDL



GENERAL FEATURES / OPŠTE KARAKTERISTIKE

- Professional vacuum cleaner for cleaning carpets, upholstery and floors
- Two-stage motor
- Built-in detergent tank (capacity 8 l)
- Stainless steel tank
- Quick connection/release metal hinges for filter and tank cleaning
- Enlarged rear wheels
- Flexible hose for liquid discharges
- When in operation, it simultaneously delivers and sucks in detergent (water or a mixture of water and a suitable detergent, to be prepared before transfer to the tank) with a flow rate of 0.8 l/min at a pressure of 2 bar.
- Profesionalni model za čišćenje tepiha, fotelja i podova
- Dvostepeni motor
- Ugrađeni rezervoar za deterdžent (zapremina 8l)
- Posuda od nerđajućeg čelika
- Metalne kopče za brzo otvaranje radi čišćenja filtera i posude
- Veći zadnji točkovi
- Fleksibilno crevo za ispuštanje tečnosti
- Pri radu se deterdžent istovremeno raspršuje i usisava (voda ili mešavina vode i odgovarajućeg deterdženta, pripremljena pre sipanja u rezervoar), uz protok od 0,8 l/min pri pritisku od 2 bar

TECHNICAL DATA / TEHNIČKI PODACI

MODEL	AR ŠIFRA																
		K ^P A	l/s	N ^o	Stepeni STAGES	W(Maks)	W	Hz	V	dB(A)	l	l/min	bar	W	l	kg	
AR2-V65BXHDL	54016	21	104	2	2	2200	2000	50-60	220-240~	72	65	1	4	48	25	28	

PRODUCT DETAILS / DETALJI PROIZVODA



Quick connection/release metal hinges for filter and tank cleaning
/ Metalne kopče za brzo otvaranje radi čišćenja filtera i posude



2 stable castor wheels
/ 2 stabilna okretna točka



Motor selector
/ Birač motora



Detergent tank
/ Rezervoar za deterdžent



Flexible hose for liquid discharges
/ Fleksibilno crevo za ispuštanje tečnosti

STANDARD ACCESSORIES / SERIJSKA OPREMA



2,5 m

code / šifra

6520150

Ø mm

Ø 38 mm

LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	DIM. PAKOVANJA	DIM. UREĐAJA	KG GROSS	EU	PUN KAMION	20"	40"	40" HQ
	(DxŠxV) mm	(DxŠxV) mm	kg					
AR2-V65BXHDL	765x550x102	-	30	3	160	60	132	132



STANDARD & OPTIONAL ACCESSORIES

MODEL	OPIS	AR ŠIFRA										
			AR1-V22BX	AR1-V35BX	AR1-V35BP	AR2-V65BPHD	AR3-V65BPHD	AR2-V65BPHT	AR3-V65BPHT	AR2-V65BXHT	AR3-V65BXHT	AR2-V65BXHDL
	Flexible suction hose / Fleksibilno usisno crevo	6520010 (2 m) (Ø 35)	S									
		6520020 (2,5 m) (Ø 38)		S	S	S	S	S	S	S	S	
	Curved handle / Zakrivljena drška	6520130 (0,5 m) (Ø 35)	S									
		6520140 (0,5 m) (Ø 38)		S	S	S	S	S	S	S	S	
	Metal suction tube / Aluminijumska cev	6520030 (Ø 35)	S									
		6520040 (Ø 38)		S	S	S	S	S	S	S	S	
	Floor brush liquid / Podna četka za tečnosti	6520050 (Ø 35)	S									
		6520060 (Ø 38)		S	S	S	S	S	S	S	S	
	Floor brush dry / Podna četka za suvo	6520070 (Ø 35)	S									
		6520080 (Ø 38)		S	S	S	S	S	S	S	S	
	Crevice nozzle / Pijosnata mlaznica	6520090 (Ø 35)	S									
		6520100 (Ø 38)		S	S	S	S	S	S	S	S	
	Round brush / Okrugla četka	6520110 (Ø 35)	S									
		6520120 (Ø 38)		S	S	S	S	S	S	S	S	
	Suction hose and hydrolytic hose / Usisno crevo i crevo za tečnost	6520150										S
	Paper filter bag (20 l) 10 pcs / Papirna filter vreća (20 l) 10 kom	6520160	O									
	Paper filter bag (30 l) 10 pcs / Papirna filter vreća (30 l) 10 kom	6520170		O	O	O	O	O	O	O	O	O
	Sponge filter for wet uses / Sunderasti filter za tečnosti	6520180	S	S	S	S	S	S	S	S	S	S

MODEL	OPIS	AR ŠIFRA										
			AR1-V22BX	AR1-V35BX	AR1-V35BP	AR2-V65BPHD	AR3-V65BPHD	AR2-V65BPHT	AR3-V65BPHT	AR2-V65BXHT	AR3-V65BXHT	AR2-V65BXHDL
	Polyester filter / Poliesterski filter	6520190 (h 220 mm) (Ø 338)	S	S	S							
		6520200 (h 290 mm) (Ø 356)				S	S	S	S	S	S	O
	Standard cartridge / Standardni filter uložak	6520210 (Ø.175 mm - h.145 mm)	O	O	O							
	HEPA H14 cartridge / HEPA H14 filter uložak	6520220 (Ø.175 mm - h.145 mm)	O	O	O							
	Standard cartridge / Standardni filter uložak	6520230 (Ø.250 mm - h.176 mm)				O	O	O	O	O	O	O
	HEPA H14 cartridge / HEPA H14 filter uložak	6520240 (Ø.250 mm - h.176 mm)				O	O	O	O	O	O	O
	Nylon filter / Najlonski filter	6520250	O	O	O							
		6520260				O	O	O	O	O	O	O
	Kit for moquette / Kit za itisone	6520270										O
	Floor cleaning wand / Štap za čišćenje podova	6520280										O
	Fitting vacuum side / Priključak na strani usisivača	6520300 (Ø 37)	S									
		6520310 (Ø 40)		S	S	S	S	S	S	S	S	



LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	AR ŠIFRA	EAN KOD	DIM. PAK.	SPOLJ. DIM.	 GROSS					
			(DxŠxV) mm	(DxŠxV) mm	kg	kom	kom	kom	kom	kom
AR1-8.17CM	15684	8016287156844	420x395x720	449x388x895	24.2	10	330	224~	464~	552
AR1-10.19CMH	15685	8016287156851	420x395x770	449x388x895	28	10	330	210~	435~	-
AR2-8.16CMK	15689	8016287156899	497x494x605	449x452x905	31.4	12*	312	132~	276~	276~
AR2-10.15CM	15765	8016287157650	500x300x360	390x240x230	29	24*	792	264~	576~	-
AR2-10.15CMK	15692	8016287156929	485x495x600	449x452x905	36	12*	312	120~	252~	-
AR3-10.16CM	15723	8016287157230	390x430x800	377x385x955	44,7	12*	396*	132*	288*	288*
AR3-10.16CMH	15825	8016287158251	390x430x800	377x385x955	45,9	12*	396*	132*	288*	288*
AR3-14.20CT	15686	8016287156868	390x430x800	377x385x955	46,3	12*	396*	132*	288*	288*
AR3-14.20CTH	15826	8016287158268	390x430x800	377x385x955	47,5	12*	396*	132*	288*	288*
AR5-10.15CM	15653	8016287156530	520x690x565	700x480x990	43	12*	396	96~	192~	-
AR5-15.18CT	15654	8016287156547	520x690x565	700x480x990	47	12*	396	96~	192~	-
AR5-15.23CT	15655	8016287156554	770x550x550	910x540x980	61.5	6*	198	90~	180~	-
AR5-21.18CT	15687	8016287156875	770x550x550	910x540x980	61.7	6*	198	90~	180~	-
AR5-21.23CT	15688	8016287156888	770x550x550	910x540x980	65.5	6*	198	90~	180~	-
AR8-10.15CMW HW	15612	8016287156128	642x342x384	562x314x363	n.p.	12*	396	264	300	-
AR8-14.20CTW HW	15613	8016287156134	642x342x384	562x314x363	n.p.	12*	396	264	300	-
AR9-12.22CL	15691	8016287156912	520x690x565	770x480x890	39.1	6	198	140~	292~	-
AR9-12.22CH	15690	8016287156905	520x690x565	771x458x926	39.1	6	198	140~	292~	-
AR9-16.28CL	15693	8016287156936	830x595x640	900x530x900	64.9	6	198	72~	153~	-
AR9-16.28CL PRO	15694	8016287156943	830x595x640	900x530x900	64.9	6	198	72~	153~	-
AR9-16.28CH PRO	15695	8016287156950	830x595x640	900x530x900	64	4*	132	75~	162~	-
AR1-8.16HM	15789	8016287157896	735x500x800	720x750x410	72	1	-	-	-	-
AR2-8.17HM	15866	8016287158664	735x500x800	720x750x410	74.5	1	-	-	-	-
AR4-10.16HM	15806	8016287158060	740x1140x1100	1000x570x820	112	1	72	30	64	-
AR4-15.18HT	15807	8016287158077	740x1140x1100	980x590x920	138	1	72	30	64	-
AR4-15.23HT	15808	8016287158084	740x1140x1100	980x590x920	138	1	72	30	64	-
AR5-15.18HT	15809	8016287158091	740x1140x1100	980x590x920	138	1	72	30	64	-
AR5-15.23HT	15810	8016287158107	740x1140x1100	980x590x920	145	1	72	30	64	-
AR5-21.18HT	15811	8016287158114	740x1140x1140	1100x700x1040	173	1	72	30	64	-
AR6-15.23HT	15905	8016287159050	1100x700x1040	740x1140x1140	173	1	72	30	64	-
AR6-21.18HT	15813	8016287158138	740x1140x1140	1100x700x1040	173	1	72	30	64	-
AR6-21.23HT	15812	8016287158121	740x1140x1140	1100x700x1040	180	1	72	30	64	-

*Paleta | •Europaleta | Floor loaded / rasuto



LOGISTIC DATA / LOGISTIČKI PODACI

MODEL	AR ŠIFRA	EAN KOD	DIM. PAK.	SPOLJ. DIM.	 KG GROSS	 EU	 PUN KAMION	 20"	 40"	 40"HQ
			(DxŠxV) mm	(DxŠxV) mm	kg	kom	kom	kom	kom	kom
AR1-V22BX	54007	8016287540070	435x455x760	-	13	15	360	195	405	405
AR1-V35BX	54008	8016287540087	435x455x760	-	14	15	360	195	405	405
AR1-V35BP	54009	8016287540094	435x455x760	-	13	15	360	195	405	405
AR2-V65BPHD	54010	8016287540100	655x560x102	-	25	3	160	64	144	144
AR3-V65BPHD	54011	8016287540117	655x560x102	-	27	3	160	64	144	144
AR2-V65BPHT	54012	8016287540124	655x560x102	-	25	3	160	64	144	144
AR3-V65BPHT	54013	8016287540131	655x560x102	-	27	3	160	64	144	144
AR2-V65BXHT	54014	8016287540148	655x560x102	-	27	3	160	64	144	144
AR3-V65BXHT	54015	8016287540155	655x560x102	-	29	3	160	64	144	144
AR2-V65BXHDL	54016	8016287540162	765x550x102	-	20	3	160	60	132	132



PRODUCTS NOMENCLATURE / NOMENKLATURA PROIZVODA

HIGH PRESSURE WASHERS / PERAČI POD PRITISKOM

ARX	-	00.00	YYYY
-----	---	-------	------

X = Series /
X = Serija

- Flow rate.Pressure /
Protok.Pritisak

Features /
Karakteristike

YYYY Features / Karakteristike

HLADNA VODA							
C	Cold water / Hladna voda	M	Single-phase / Monofazni	W	Wall-mounted / Zidna montaža	HW	Hot water / Topla voda
		T	Three-phase / Trofazni	H	Hose reel / Motolica creva		
				K	Kart kit / Kit kolica		
BENZINSKI MOTOR							
C	Cold water / Hladna voda	L	Loncin				
		H	Honda				
TOPLA VODA							
H	Hot water / Topla voda	M	Single-phase / Monofazni				
		T	Three-phase / Trofazni				

VACUUM CLEANERS / USISIVAČI

ARX	-	VYY	ZZZZ
-----	---	-----	------

X = Motor number /
X = Broj motora

- YY = Tank capacity /
YY = Zapremina posude

Features /
Karakteristike

ZZZZ Features / Karakteristike

USISIVAČI ZA SUVO / MOKRO									
B	Two stages / <i>Dvostepeni</i>	P	Polypropylene tank / <i>Posuda od PP</i>	H	Handle / <i>Drška</i>	D	Liquid drainage / <i>Ispust tečnosti</i>	L	Cleaning carpets / <i>Pranje tepiha</i>
		X	Stainless steel tank / <i>Inox posuda</i>			T	Liquid drainage / <i>Nagibna posuda</i>		



Discover more on
www.ar-professional.it

*/ Saznajte više na
www.ar-professional.it*

ECO Steam

Generalni distributer AR Professional serije za Srbiju

Vojvode Putnika 43, Trnava

35000 Jagodina, Srbija

Tel. +381 63 640 101

info@eco-steam.rs

www.eco-steam.rs

PIB 109708827 · MB 64372688

AR Professional u Srbiji

Perači pod pritiskom

Annovi Reverberi perači

Oprema i rezervni delovi

Rezervni delovi za perače

Dodatna oprema

Visokopritisne dizne

Visokopritisne spojnice i adapteri

Visokopritisna creva i motalice

Pištolji i koplja

Specijalna oprema

Filteri, dovod vode i hemije

Oprema za čišćenje cevi i kanalizacije

Oprema za peskarenje visokim pritiskom