BIEMMEDUE
heating, cleaning and drying

ELETTRICO
ELECTRIC



CONFORT 40 E

STACIONARNI INDUSTRIJSKI GENERATORI TOPLOG VAZDUHA PLUG & PLAY NA ELEKTRIČNI POGON

ELECTRICAL INDUSTRIAL PLUG AND PLAY CABINET SPACE HEATERS

ECO Steam · Vojvode Putnika 43, Trnava, 35000 Jagodina · tel. +381 63 640 101 · info@eco-steam.rs · www.eco-steam.rs

CONFORT 40 E - STACIONARNI INDUSTRIJSKI GENERATORI TOPLOG VAZDUHA PLUG & PLAY NA ELEKTRIČNI POGON

- Namenjen primeni u šatorskim konstrukcijama, šatorima, vanrednim situacijama i mobilnim primenama gde nije dozvoljena upotreba fosilnih goriva
- Oklopljeni električni grejači AISI 321, savijeni u profil sa visokom razmenom toplote
- Birač snage (20 kW, 30 kW, 40 kW)
- Kabl za električno napajanje (0,5 m)
- Sigurnosni termostat za slučaj pregrevanja, sa ručnim resetom
- Za pričvršćivanje se koriste isključivo metrički zavrtnji i umeci, bez samourezujućih zavrtnja
- Centrifugalni ventilator sa zaštitom IP 55: - veoma tih (buka ≤ 66 db na 2 metra);
  - visokog potiska i performansi koji obezbeđuje veliki protok vazduha i statički pritisak za ravnomerno distribuiranje toplog vazduha na velike udaljenosti putem kanala ili fleksibilnih kanala;
- Ugrađeni elektronski sobni termostat (0°/+40° C)
- Priključak za spoljni termostat
- Bitermostat FAN-LIMIT sa automatskim resetom za prethodno zagrevanje ili naknadnu ventilaciju
- Spoljna konstrukcija od dvostrukog čeličnog lima za toplotnu i zvučnu izolaciju

- *Designed for applications in structures, tents, emergencies and mobile applications where the use of fossil fuels is not allowed*
- *Extra strength elements AISI 321 for high performance*
- *Selector switch (20 kW, 30 kW, 40 kW)*
- *Power cord (0,5 m)*
- *Safety thermostat in case of overheating, with manual reset*
- *All installation inserts and screws are exclusively metric, not self-tapping*
- *Centrifugal Fan IP 55:*
  - very low noise fan (noise level ≤ 66 db at 2 meters)
  - high output, high performance fan guarantees increased air flow and static pressure for uniform and long distance diffusion of warm air through channels or ducts;
- *Built-in electronic room thermostat (0°/+40° C)*
- *Socket for external thermostat*
- *Automatic reset FAN-LIMIT bi-thermostat for pre-heating or post-cooling*
- *Double skinned body for thermo-acoustic insulation and safe low surface temperature*











DODATNA OPREMA NA ZAHTEV / *ACCESSORIES ON DEMAND*

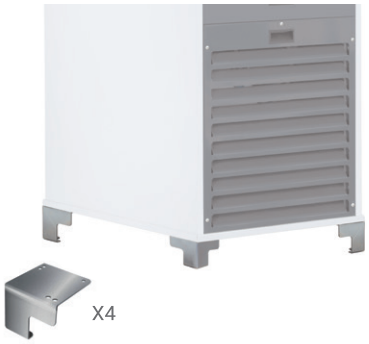DIFUZOR VAZDUHA SA LAMELAMA PODESIVIM (PLENUM) ***AIR OUTLET WITH ADJUSTABLE LOUVRES (PLENUM)***	**OBRTNI DIFUZOR VAZDUHA 360° SA PODESIVIM LAMELAMA** ***AIR OUTLET HEAD WITH ADJUSTABLE LOUVRES, REVOLVING AT 360°***	**KIT NOGARA** ***FEET KIT***
		
Mod. CONFORT 40 E **Šif.** 04AC131	**Mod.** CONFORT 40 E **Šif.** 04AC132	**Mod.** CONFORT 40 E **Šif.** 04AC110
KIT TOČKOVA (OKRETNIH) ***WHEELS KIT (SWIVELLING)***	**SOBNI TERMOSTAT +5/+30°C SA KABLOM L=10 m BEZ UTIKAČA** ***ROOM THERMOSTAT +5/+30°C CABLE 10 m WITHOUT PLUG***	**ELEKTRONSKI TERMOSTAT VISOKE PRECIZNOSTI IP55 SA DISPLEJOM -10/+70°C BEZ KABLA I UTIKAČA** ***ELECTRONIC THERMOSTAT IP55 WITH DISPLAY -10/+70°C WITHOUT POWER CORD AND PLUG***
		
Mod. CONFORT 40 E (Ø 100 mm) **Šif.** 04AC111	**Šif.** 02AC581	**Šif.** 02AC294
UTIKAČ SA 4 POLA ***4 PIN PLUG***		
		
Mod. 63A (3P+⏚ +N) **Šif.** 06AC108		
Mod. 63A (3P+⏚) **Šif.** 06AC109		

CONFORT 40 E - STACIONARNI INDUSTRIJSKI GENERATORI TOPLOG VAZDUHA PLUG & PLAY NA ELEKTRIČNI POGON
ELECTRICAL INDUSTRIAL PLUG AND PLAY CABINET SPACE HEATERS

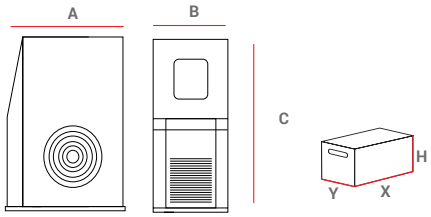

TEŽINA I DIMENZIJE MAŠINE *WEIGHTS AND DIMENSIONS MACHINE*					PAKOVANJE *PACKAGING*			
MOD	A	B	C	Neto/*Net*	X	Y	H	Bruto/*Gross*
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
CONFORT 40 E	926	650	1.130	120	1.030	700	1.280	136

		CONFORT 40 E
šifra - *code*		04CB108
maks. nom. toplotna snaga *max rated heat power*	[kW] [kcal/h - BTU/h]	40 34.400 - 137.600
iskorišćenje - *heat efficiency*	[%]	100
protok vazduha - *air flow*	[m^3/h]	6.300
raspoloživi statički pritisak - *available static pressure*	mm H_2O - Pa	20 - 200
porast temperature - *temperature rise*	a 20°C [°C]	50
maks. struja - *current max*	[A]	60
električno napajanje - *electrical power*	[V - ph - Hz]	400 - 3 - 50
buka - *noise level*	[dBA at 1 meter]	68
priključci - *connections*	[br.]	3P+⏚
količina po paleti - *pallet quantities*	[kom - *pcs*]	1

BIEMMEDUE S.p.A. Via Industria, 12 - 12062 Cherasco (CN) - Italy - T. +39 0172 486111 - F. +39 0172 488270
bm2@biemmedue.com - www.biemmedue.com