BIEMMEDUE
heating, cleaning and drying

ELETTRICO
ELECTRIC



EK P

MOBILNI ELEKTRIČNI GENERATORI TOPLOG VAZDUHA

ELECTRICAL MOBILE SPACE HEATERS


ECO Steam · Vojvode Putnika 43, Trnava, 35000 Jagodina · tel. +381 63 640 101 · info@eco-steam.rs · www.eco-steam.rs

EK P - MOBILNI ELEKTRIČNI GENERATORI TOPLOG VAZDUHA
ELECTRICAL MOBILE SPACE HEATERS

- Kućište iznutra i spolja od nerđajućeg čelika
- Mogućnost zidne ili plafonske montaže sa podesivim nagibom pomoću priložene ručke
- Oklopljeni električni grejači AISI 321 sa visokom razmenom toplote
- Automatski FAN termostat za duvanje samo toplog vazduha, sa predgrevanjem grejača i naknadnim hlađenjem ventilacijom
- OVERHEATING termostat za zaštitu od pregrevanja sa ručnim resetovanjem
- Preklopnik sa četiri položaja (15 kW, 10 kW, 0, ventilacija)
- Električna tabla sa zaštitom IP55
- Mogućnost povezivanja sa termostatom, higrostatom ili tajmerom
- Motor IP55
- Prednja rešetka od nerđajućeg čelika
- Daljinsko upravljanje, kabl l = 3 m

- *High grade stainless steel body*
- *Delivered with a frame allowing adjustable installation to a wall or to a ceiling*
- *High strength electrical resistances AISI 321 with big thermal exchange surface*
- *Fan thermostat to avoid cold drafts. Fan starts once resistances are warm and stops when resistances are cold*
- *Safety OVERHEATING manual reset thermostat*
- *Four positions switch (15 kW, 10kW, 0, FAN)*
- *IP55 electric board grade protection*
- *Connectable to external climate computer*
- *IP55 protection grade motor*
- *Stainless steel front protection grid*
- *Remote control, cable l = 3 m*




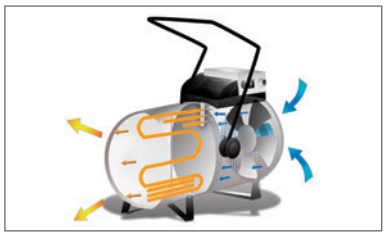



DODATNA OPREMA NA ZAHTEV / *ACCESSORIES ON DEMAND*

SOBNI TERMOSTAT +5/+30°C SA KABLOM L=10 m I UTIKAČ 90° *ROOM THERMOSTAT +5/+30°C CABLE 10 m, PLUG 90°*	**TERMOSTAT POLJOPRIVREDA/GRADILIŠTE -5/+50°C SA KABLOM L=10 m I UTIKAČ 90°** *HEAVY DUTY THERMOSTAT -5/+50°C CABLE 10 m, PLUG 90°*	**PRECIZNI ELEKTRONSKI TERMOSTAT IP55 SA DISPLEJEM -10/+70°C BEZ KABLA I UTIKAČA** *ELECTRONIC THERMOSTAT IP55 WITH DISPLAY -10/+70°C WITHOUT POWER CORDAND PLUG*	**UTIKAČ 4-5 POLOVA** *4-5 PIN PLUG*
			
Šif. 02AC581	**Šif.** 02AC582	**Šif.** 02AC294	**Mod.** 3P+⏚ **Šif.** 06AC103 32A **Mod.** 3P+⏚+N **Šif.** 06AC105 32A

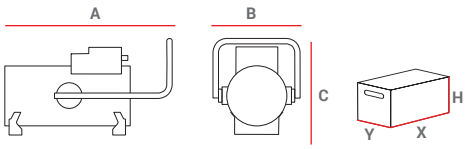

TEŽINA I DIMENZIJE MAŠINE *WEIGHTS AND DIMENSIONS MACHINE*					PAKOVANJE *PACKAGING*			
MOD	A	B	C	Neto/*Net*	X	Y	H	Bruto/*Gross*
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
EK 15 P	768	450	445	20	632	432	350	21

		EK 15 P
šifra - *code*		06EK503
nom. toplotna snaga maks. *max rated heat power*	Hs [kW] Hs [kcal/h - BTU/h]	15 12.900 - 51.185
nom. toplotna snaga min. *min rated heat power*	Hs [kW] Hs [kcal/h - BTU/h]	10 8.600 - 34.120
iskorišćenje - *heat efficiency*	[%]	100
protok vazduha - *air flow*	[m^3/h]	2.000
porast temperature - *temperature rise*	pri 20°C [°C]	54,3 - 35
maks. struja - *current max*	[A]	21 - 13,8
napajanje - *electrical power*	[V - ph - Hz]	400 - 3 - 50
količina po paleti - *pallet quantities*	[kom - *pcs*]	24