BIEMMEDUE
heating, cleaning and drying

GASOLIO OIL · GPL LPG · METANO NATURAL GAS · KEROSENE



FARM

VISEĆI GENERATORI TOPLOG VAZDUHA VELIKOG PROTOKA SA INDIREKTNIM SAGOREVANJEM

INDIRECT COMBUSTION HEAVY DUTY SUSPENDED SPACE HEATERS


ECO Steam · Vojvode Putnika 43, Trnava, 35000 Jagodina · tel. +381 63 640 101 · info@eco-steam.rs · **www.eco-steam.rs**

FARM - VISEĆI GENERATORI TOPLOG VAZDUHA VELIKOG PROTOKA SA INDIREKTNIM SAGOREVANJEM

- Mašina se može instalirati u horizontalnom ili vertikalnom položaju
- Gorionik opremljen snorkel priključkom koji obezbeđuje čist vazduh za sagorevanje putem veze sa crevom za usis vazduha spolja
- Novi izmenjivač toplote u kombinaciji sa novim ventilatorima većih performansi omogućava toplotnu efikasnost od 92 ÷93%
- Predgrevanje i naknadna ventilacija komore za sagorevanje
- Staklo za kontrolu komore za sagorevanje
- Termostati: FAN za kontrolu ventilatora; LIMIT za kontrolu gorionika; OVERHEATING sigurnosni termostat u slučaju pregrevanja sa ručnim resetovanjem.
- Paneli sa unakrsnim ojačanim pregibima za veću krutost i čvrstoću
- Noseća konstrukcija sa demontažnim panelima za unutrašnje pranje, i kada je mašina okačena
- Isključivo metrički zavrtnji i umeci za pričvršćivanje, bez samourezujućih zavrtnja
- Ventilator:
  - u skladu sa direktivom ERP 2015
  - veoma tih (nivo buke < 69 db na 1 metar)
  - 7 lopatica: visoke performanse (protok vazduha i statički pritisak) za ravnomernu raspodelu toplog vazduha preko perforiranog kanala
  - stepen zaštite IP55
  - difuzor ventilatora za usmeravanje vazduha i obezbeđenje visokog statičkog pritiska
- Električna tabla:
  - može se povezati na termostat/higrostat/tajmer
  - mogućnost povezivanja na upravljačku jedinicu centralizovanog sistema preko redne stezaljke
- Svaka glavna komponenta (ventilator, gorionik, električna tabla, termostati itd.) opremljena je brzim električnim priključcima IP68:
  - brza montaža/demontaža i tehnička intervencija
  - izbegavanje grešaka pri montaži/demontaži
- Robusne kuke za vešanje od nerđajućeg čelika za montažu na plafon i noge za oslanjanje od nerđajućeg čelika za montažu na pod

- *The unit can be installed horizontally or vertically,*
- *Burner is supplied with snorkel outlet to ensure clean combustion air through connection with external air aspiration duct*
- *The new heat exchanger combined with the new high-performance fans allow for heat output of 92 / 93%*
- *Before heating and after cooling of combustion chamber*
- *Combustion chamber inspection glass peep-hole*
- *Thermostat: FAN for fan control; LIMIT: for burner control; OVERHEATING: safety thermostat in case of overheating, with manual reset*
- *Panels with reinforcement cross fold to ensure higher rigidity and strength*
- *Bearing structure with removable panels for internal washing, even on hanging machines*
- *All installation inserts and screws are exclusively metric, not self-tapping*
- *Fan:*
  - *in compliance with directive ERP 2015*
  - *extremely low-noise fan (noise level less than 69 db at 1 meter)*
  - *with 7 blades: high performance (air flow and static pressure) for uniform diffusion of warm air through the perforated duct*
  - *insulation class IP55*
  - *fan inlet to carry the air and ensure high static pressure*
- *Electric switchboard:*
  - *can be connected to thermostat/humidistat/timer*
  - *Can be connected to a central control unit through wired terminal*
- *Each main component (fan, burner, electrical switchboard, thermostats, etc.) is supplied with quick couplings of electrical connections IP68:*
  - *quick assembly and disassembly and technical interventions*
  - *elimination of installation and disassembly errors*
- *Sturdy suspension hooks in stainless steel for ceiling installation and support feet in stainless steel for floor installation*



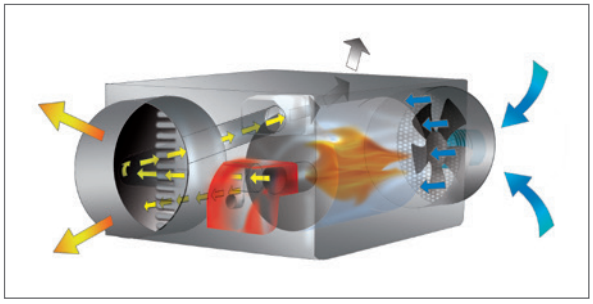









DODATNA OPREMA NA ZAHTEV / *ACCESSORIES ON DEMAND*

ADAPTER ZA 1 PRAVAC *ONE WAY ADAPTER*	BOČNI PANEL ZA 1 PRAVAC *ONE WAY SIDE PANEL*
	
Mod. FARM 85 (Ø 450 mm) **Šif.** 02AC721	**Mod.** FARM 85 **Šif.** 02AC722
Mod. FARM 110 (Ø 500 mm) **Šif.** 02AC731	**Mod.** FARM 110 **Šif.** 02AC732
Mod. FARM 145 (Ø 600 mm) **Šif.** 02AC741	**Mod.** FARM 145 **Šif.** 02AC742
Mod. FARM 185 (Ø 650 mm) **Šif.** 02AC751	**Mod.** FARM 185 **Šif.** 02AC752
Mod. FARM 235 (Ø 700 mm) **Šif.** 02AC761	**Mod.** FARM 235 **Šif.** 02AC762
BOČNI PANEL SA ADAPTEROM ZA 2 PRAVCA ***SIDE PANEL WITH TWO WAYS ADAPTER***	**KIT KOLICA (SAMO ZA VERTIKALNU MONTAŽU)** ***TROLLEY KIT (ONLY FOR VERTICAL INSTALLATION)***
	
Mod. FARM 85 (Ø 400 mm) **Šif.** 02AC723	**Mod.** FARM 85 **Šif.** 02AC725
Mod. FARM 110 (Ø 400 mm) **Šif.** 02AC733	**Mod.** FARM 110 **Šif.** 02AC735
Mod. FARM 145 (Ø 500 mm) **Šif.** 02AC743	**Mod.** FARM 145 **Šif.** 02AC745
Mod. FARM 185 (Ø 500 mm) **Šif.** 02AC753	**Mod.** FARM 185 **Šif.** 02AC755
Mod. FARM 235 (Ø 600 mm) **Šif.** 02AC763	**Mod.** FARM 235 **Šif.** 02AC765

FARM - VISEĆI GENERATORI TOPLOG VAZDUHA VELIKOG PROTOKA SA INDIREKTNIM SAGOREVANJEM

GORIONIK RIELLO NA DIZEL ***RIELLO DIESEL BURNER***	**GORIONIK RIELLO TNG+GASNA RAMPA** ***LPG RIELLO BURNER+GAS TRAIN***	**GORIONIK RIELLO METAN+GASNA RAMPA** ***NATURAL GAS RIELLO BURNER+GAS TRAIN***
		
Mod. FARM 85 DIZEL/*OIL* **Šif.** 076B101	**Mod.** FARM 85 TNG/*LPG* **Šif.** 074B101-01	**Mod.** FARM 85 METAN/*NATURAL GAS* **Šif.** 074B102-01
Mod. FARM 110 DIZEL/*OIL* **Šif.** 076B102	**Mod.** FARM 110/145 TNG/*LPG* **Šif.** 074B103-01	**Mod.** FARM 110/145 METAN/*NATURAL GAS* **Šif.** 074B104-01
Mod. FARM 145 DIZEL/*OIL* **Šif.** 076B103		
Mod. FARM 185 DIZEL/*OIL* **Šif.** 076B104	**Mod.** FARM 185 TNG/*LPG* **Šif.** 074B103-02	**Mod.** FARM 185 METAN/*NATURAL GAS* **Šif.** 074B104-02
Mod. FARM 235 DIZEL/*OIL* **Šif.** 076B105	**Mod.** FARM 235 TNG/*LPG* **Šif.** 074B105-03	**Mod.** FARM 235 METAN/*NATURAL GAS* **Šif.** 074B106-03
GORIONIK ECOFLAM NA DIZEL ***ECOFLAM DIESEL BURNER***	**KIT SNORKEL ZA USIS ČISTOG VAZDUHA SPOLJA PREKO KANALA** ***SNORKEL KIT FOR ECOFLAM BURNER***	**PROLAZNA PLOČA SNORKEL + FLEKSIBILNI KANAL** ***SNORKEL PASS PLATE + FLEXIBLE DUCT***
		
Mod. FARM 85 DIZEL/*OIL* **Šif.** 072B111	**Mod.** FARM 85/110 (Ø 80/100 mm) ECOFLAM **Šif.** 02AC602	**Mod.** FARM 85/110/145/185 (Ø 100 mm) **Šif.** 02AC793
Mod. FARM 110 DIZEL/*OIL* **Šif.** 072B112		**Mod.** FARM 235 (Ø 150 mm) **Šif.** 02AC794
Mod. FARM 145 DIZEL/*OIL* **Šif.** 072B113	**Mod.** FARM 145/185/235 (Ø 100 mm) ECOFLAM **Šif.** 02AC603	**Mod.** Kanal/*Duct* FARM 85/110/145/185 RIELLO/ECOFLAM (Ø 100 mm, l=5m) **Šif.** 02AC577
Mod. FARM 185 DIZEL/*OIL* **Šif.** 072B114		
Mod. FARM 235 DIZEL/*OIL* **Šif.** 072B115		**Mod.** Kanal/*Duct* FARM 235 RIELLO (Ø 150 mm, l=5m) **Šif.** 02AC792
SOBNI TERMOSTAT +5/+30°C SA KABLOM L=10 m I UTIKAČ 90° ***ROOM THERMOSTAT +5/+30°C CABLE 10 m, PLUG 90°***	**TERMOSTAT ZA POLJOPRIVREDU/GRADILIŠTE -5/+50°C SA KABLOM L=10 m I UTIKAČ 90°** ***HEAVY DUTY THERM. -5/+50°C CABLE 10 m, PLUG 90°***	**PRECIZNI ELEKTRONSKI TERMOSTAT IP55 SA DISPLEJEM -10/+70°C BEZ KABLA I UTIKAČA** ***ELECTRONIC THERMOSTAT IP55 WITH DISPLAY -10/+70°C WITHOUT POWER CORD AND PLUG***
		
Šif. 02AC581	**Šif.** 02AC582	**Šif.** 02AC294
FILTER ZA PREDGREJANO DIZEL GORIVO ***PRE-HEATED FUEL FILTER***	**KIT ZA MONOCEVNO PRIKLJUČENJE SA FILTEROM** ***SINGLE PIPE EXTERNAL FUEL TANK CONNECTION KIT WITH DEAERATOR***	**FILTER ZA ODVAJANJE VODE** ***ANTI-WATER FILTER***
		
Šif. 02AC548	**Šif.** 02AC800	**Šif.** 02AC801

FILTER GASA *GAS FILTER* (P.ul MAKS 2 bar)	FILTER REGULATOR GASA *GAS FILTER REGULATOR* (P.ul MAKS 2 bar)	CREVO SREDNJEG PRITISKA (l = 3 m) + VENTIL ZATVARANJA + PRIKLJUČNI SPOJEVI *MEDIUM PRESSURE GAS HOSE (l= 3 m)* *+ GAS VALVE + CONNECTIONS* (P. MAKS 10 bar)
		
Mod. FARM 85/110/145 (DN 25 - 1") **Šif.** 03AC603	**Mod.** FARM 85/110/145 PRIRODNI GAS - *NATURAL GAS* (DN 25 3/4" ili 1") (P.izl. podeš. 20mbar) **Šif.** 03AC617	**Mod.** FARM 85/110/145 Crevo/*Hose* gasno 1" **Šif.** 03AC615
	Mod. FARM 85/110/145 TNG - *LPG* (DN 25 3/4" ili 1") (P.izl. podeš. 30mbar) **Šif.** 03AC618	
Mod. FARM 185/235 (DN 32 - 1 1/4") **Šif.** 03AC604	**Mod.** FARM 185/235 (DN 32 - 1 1/4") (P.izl. nije podešen - to be set) **Šif.** 03AC602	**Mod.** FARM 185/235 Crevo/*Hose* gasno 1 1/4" **Šif.** 03AC616
CREVO NISKOG PRITISKA l=(2 m) + VENTIL ZATVARANJA + PRIKLJUČNI SPOJEVI ***LOW PRESSURE GAS HOSE (l= 2 m)*** ***+ GAS VALVE + CONNECTIONS*** **(P.ul MAKS 0,5 bar)**	**DALJINSKO UPRAVLJANJE ZA POJEDINAČNU MAŠINU (MAKS. UDALJENOST 3m)** ***SINGLE UNIT REMOTE CONTROL*** ***(MAX DISTANCE 3m)***	**KIT TAJMERA ZA UKLJUČIVANJE MAŠINA SA RAZLIČITIM VREMENIMA I SEKVENCIJALNO** ***DELAYED AND SEQUENTIAL STARTING RELAY***
		
Mod. FARM 85/110/145 Crevo/*Hose* gasno 1" **Šif.** 03AC612	**Šif.** 02AC802	**Šif.** 02AC803
PROLAZNA PLOČA ***CHIMNEY PASS-PLATE***	**KOLENO 90° ZA ODVOD DIMA, INOX** ***STAINLESS STEEL EXHAUST ELBOW***	**CEV ZA ODVOD DIMA, INOX (L = 1 m)** ***STAINLESS STEEL EXHAUST PIPE (L = 1 m)***
		
Mod. FARM 85/110 (Ø 150 mm) **Šif.** 02AC432	**Mod.** FARM 85/110 (Ø 150 mm) **Šif.** 02AC288	**Mod.** FARM 85/110 (Ø 150 mm) **Šif.** 02AC285
Mod. FARM 145/185/235 (Ø 200 mm) **Šif.** 02AC412	**Mod.** FARM 145/185/235 (Ø 200 mm) **Šif.** 02AC290	**Mod.** FARM 145/185/235 (Ø 200 mm) **Šif.** 02AC287
KAPA ZA DIMNJAK, INOX ***STAINLESS STEEL CHIMNEY POT***	**ADAPTER ZA USIS VAZDUHA 1 PRAVAC** ***AIR INLET ADAPTER***	**ARMIRANI KANAL ZA POVRAT VAZDUHA** ***REINFORCED FLEXIBLE AIR INLET DUCT***
		
Mod. FARM 85/110 (Ø 150 mm) **Šif.** 02AC657	**Mod.** FARM 85 (Ø 505 mm) **Šif.** 02AC724	**Mod.** FARM 85 (Ø 510 mm, l=6m) **Šif.** 02AC795
	Mod. FARM 110 (Ø 565 mm) **Šif.** 02AC734	**Mod.** FARM 110 (Ø 570 mm, l=6m) **Šif.** 02AC796
Mod. FARM 145/185/235 (Ø 200 mm) **Šif.** 02AC658	**Mod.** FARM 145-185 (Ø 625 mm) **Šif.** 02AC744	**Mod.** FARM 145-185 (Ø 650 mm, l=6m) **Šif.** 02AC797
	Mod. FARM 235 (Ø 715 mm) **Šif.** 02AC764	**Mod.** FARM 235 (Ø 720 mm, l=6m) **Šif.** 02AC798


OBUJMICA ZA FIKSIRANJE KANALA ZA DOVOD I POVRAT VAZDUHA *CLIP FOR FLEXIBLE AIR INLET/OUTLET DUCT*	PRODUŽETAK ZA SMANJENJE TEMPERATURE ZA PERFORIRANI PVC KANAL *PREFORATED PVC FLEXIBLE AIR DUCT EXTENSION*	KIT ZA FIKSIRANJE PERFORIRANOG PVC KANALA *PREFORATED PVC FLEXIBLE AIR DUCT HANGING KIT*
		
Mod. Svi/*All* (Ø 400-750 mm) **Šif.** 02AC663	**Mod.** FARM 85 (Ø 455 mm l=1 m) **Šif.** 02AC808	**Mod.** Svi - *All* (kabl/*cable* 45m + kuke/hooks) **Šif.** 02AC789
	Mod. FARM 110 (Ø 505 mm l=1 m) **Šif.** 02AC809	
	Mod. FARM 145 (Ø 605 mm l=1 m) **Šif.** 02AC810	**Mod.** Svi - *All* (kabl/*cable* 70m + kuke/hooks) **Šif.** 02AC790
	Mod. FARM 185 (Ø 655 mm l=1 m) **Šif.** 02AC811	
	Mod. FARM 235 (Ø 705 mm l=1 m) **Šif.** 02AC812	**Mod.** Svi - *All* (kabl/*cable* 120m + kuke/hooks) **Šif.** 02AC791

PERFORIRANI KANALI / *PREFORATED DUCT*

BM2 preporučuje isključivo upotrebu perforiranih kanala navedenih u tabeli (str. 101), koji su razvijeni i definisani za svaki model FARM kako bi se u svakoj situaciji postigla optimalna ravnoteža između dužine samog kanala, raspodele toplog vazduha i ispravnog rada sigurnosnih termostata. Pored toga, kanali su opremljeni posebnim metalnim ušicama za lako i sigurno vešanje i produžavanje/skraćivanje.

In order to always obtain under all circumstances the optimal balance between the duct length, warm air diffusion and the correct functioning of safety thermostats, BM2 recommends to exclusively use only the perforated ducts listed in the the table (page 101) which have been designed and defined for each FARM model. Furthermore these ducts are supplied with special metal rings for safe and easy hanging, extension or reduction.


PERFORIRANI KANALI / *PREFORATED DUCT*

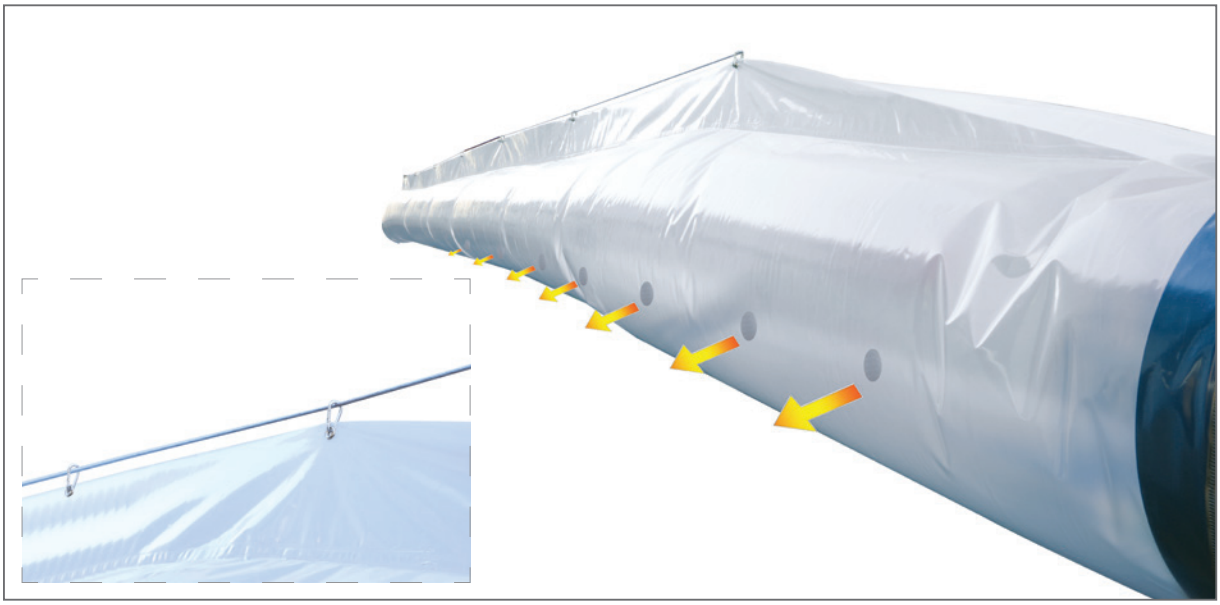

MODEL *MODEL*	ŠIFRA *CODE*	DUŽINA PERFORIRANOG KANALA (m) *LENGHT PREFORATED AIR DUCT (m)*	Ø PERFORIRANOG KANALA (mm) *Ø PREFORATED AIR DUCT (mm)*	L.min SKRATIVO (m) *REDUCTABLE L.min (m)*	OTVORI/KORAK (mm)* *HOLES/PITCH (mm)**
FARM 85	02AC766	25m (1 pravac/ 1 way)	500	10	200/230
	02AC767	50m (1 pravac/ 1 way)	500	20	200/480
	02AC768	100m (1 pravac/ 1 way)	500	40	200/960
	02AC769	25m (2 pravca/ 2 ways)	400	10	100/460
	02AC770	50m (2 pravca/ 2 ways)	400	20	100/960
FARM 110	02AC771	25m (1 pravac/ 1 way)	500	10	270/170
	02AC772	50m (1 pravac/ 1 way)	500	20	270/353
	02AC773	100m (1 pravac/ 1 way)	500	40	270/725
	02AC774	25m (2 pravca/ 2 ways)	400	10	140/355
	02AC775	50m (2 pravca/ 2 ways)	400	20	140/715
FARM 145	02AC776	25m (1 pravac/ 1 way)	600	15	200/228
	02AC777	50m (1 pravac/ 1 way)	600	20	200/475
	02AC778	100m (1 pravac/ 1 way)	600	40	200/980
	02AC779	25m (2 pravca/ 2 ways)	500	10	100/500
	02AC780	50m (2 pravca/ 2 ways)	500	20	100/1000
FARM 185	02AC781	25m (1 pravac/ 1 way)	700	15	200/228
	02AC782	50m (1 pravac/ 1 way)	700	30	200/480
	02AC783	100m (1 pravac/ 1 way)	700	60	200/980
	02AC779	25m (2 pravca/ 2 ways)	500	10	100/500
	02AC780	50m (2 pravca/ 2 ways)	500	30	100/1000
FARM 235	02AC784	25m (1 pravac/ 1 way)	700	15	250/185
	02AC785	50m (1 pravac/ 1 way)	700	30	250/381
	02AC786	100m (1 pravac/ 1 way)	700	60	250/785
	02AC787	25m (2 pravca/ 2 ways)	600	10	150/330
	02AC788	50m (2 pravca/ 2 ways)	600	30	150/640


* Otvori - *Holes* Ø= 50 mm

FARM - VISEĆI GENERATORI TOPLOG VAZDUHA VELIKOG PROTOKA SA INDIREKTNIM SAGOREVANJEM




1/3





2/3






3/3







TEŽINA I DIMENZIJE MAŠINE* *WEIGHTS AND DIMENSIONS MACHINE*					PAKOVANJE *PACKAGING*			
MOD	A	B	C	Neto/*Net*	X	Y	H	Bruto/*Gross*
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
FARM 85	980	910	738	99	-	-	-	-
1/3	-	-	-	-	1.020	920	740	104
2/3	-	-	-	-	500	500	320	17
3/3	-	-	-	-	360	325	190	4,5
FARM 110	1.110	950	768	122	-	-	-	-
1/3	-	-	-	-	1.150	950	768	127
2/3	-	-	-	-	560	560	320	20
3/3	-	-	-	-	360	325	190	4,5
FARM 145	1.220	1.080	838	158	-	-	-	-
1/3	-	-	-	-	1.238	1.085	838	163
2/3	-	-	-	-	620	620	320	22
3/3	-	-	-	-	360	325	190	4,5
FARM 185	1.324	1.140	858	163	-	-	-	-
1/3	-	-	-	-	1.335	1.150	860	168
2/3	-	-	-	-	620	620	320	22
3/3	-	-	-	-	360	325	190	4,5
FARM 235	1.514	1.310	938	233	-	-	-	-
1/3	-	-	-	-	1.550	1.320	940	238
2/3	-	-	-	-	700	700	350	25
3/3	-	-	-	-	360	325	190	4,5

* Mašina kompletna sa gorionikom, ventilatorom i prednjim izlazom za 1 pravac
Complete machine with burner, fan and 1 way frontal adapter

NA ZAHTEV: PAKOVANA MAŠINA (KUTIJA, PALETA)
ON DEMAND PACKAGING FOR FARM (CARTON BOX, PALLET)



MODEL *MODEL*	ŠIFRA *CODE*	DIMENZIJE PAKOVANJA *PACKAGING DIMENSIONS*	UKUPNA BRUTO TEŽINA (kg) *TOTAL GROSS WEIGHT (kg)*
FARM 85 (JEDNOFAZNO-SINGLE PHASE)	99AA120	1490 x 960 x h= 910	123
FARM 110 (JEDNOFAZNO-SINGLE PHASE)	99AA130	1660 x 1010 x h= 930	142
FARM 145 (JEDNOFAZNO-SINGLE PHASE)	99AA140	1795 x 1120 x h= 1010	187
FARM 185 (JEDNOFAZNO-SINGLE PHASE)	99AA150	1930 x 1210 x h= 1030	204
FARM 235 (JEDNOFAZNO-SINGLE PHASE)	99AA160	2130 x 1370 x h= 1110	258
FARM 145 (TROFAZNO-THREE PHASE)	99AA140	1795 x 1120 x h= 1010	187
FARM 185 (TROFAZNO-THREE PHASE)	99AA150	1930 x 1210 x h= 1030	204
FARM 235 (TROFAZNO-THREE PHASE)	99AA160	2130 x 1370 x h= 1110	258

		JEDNOFAZNO / SINGLE PHASE					TROFAZNO / THREE PHASE		
MODEL *MODEL*		***FARM 85M* (OIL-GAS)***	***FARM 110M* (OIL-GAS)***	***FARM 145M* (OIL-GAS)***	***FARM 185M* (OIL-GAS)***	***FARM 235M* (OIL-GAS)***	***FARM 145T* (OIL-GAS)***	***FARM 185T* (OIL-GAS)***	***FARM 235T* (OIL-GAS)***
ŠIFRA *CODE*		02FA121	02FA131	02FA141	02FA151	02FA161	02FA142	02FA152	02FA162
TOPLOTNA SNAGA NOMINALNA *RATED HEAT POWER*	Hs [kW] Hs [kcal/h - BTU/h]	85,62 73.630 294.518	110,46 94.999 379.996	144,72 124.455 497.821	185,54 159.563 638.254	235,72 202.715 810.861	144,72 124.455 497.821	185,54 159.563 638.254	235,72 202.715 810.861
KORISNA TOPLOTNA SNAGA *OUTPUT HEAT POWER*	Hs [kW] Hs [kcal/h - BTU/h]	79,37 68.255 273.019	102,51 88.159 352.636	134,87 115.992 463.969	171,07 147.117 588.470	216,86 186.498 745.992	134,87 115.992 463.969	171,07 147.117 588.470	216,86 186.498 745.992
ISKORIŠĆENJE *EFFICIENCY*	[%]	92,70	92,80	93,20	92,20	92,00	93,20	92,20	92,00
PROTOK VAZDUHA *AIR FLOW*	[m^3/h]	7.000	8.500	11.000	12.000	16.200	11.000	12.000	16.200
STATIČKI PRITISAK RASP. *AVAILABLE STATIC PRESS*	[Pa- mm H_2O]	200-20	200-20	200-20	200-20	200-20	200-20	200-20	200-20
PORAST TEMPERATURE *TEMPERATURE RISE*	pri 20°C [°C]	48	52	52	61	58	52	61	58
EFEKTIVNI DOMET GREJANJA *EFFECTIVE HEAT RANGE*	[m]	45	43	43	51	55	43	51	55
POTROŠNJA DIZEL GORIVA *OIL CONSUMPTION*	[kg/h]	6,77	8,74	11,45	14,68	18,65	11,45	14,68	18,65
POTROŠNJA METANA *NATURAL GAS CONSUMPTION G20*	[m^3/h]	7,935	10,433	13,664	17,383	22,095	13,664	17,383	22,095
ULAZNI PRITISAK *INLET PRESSURE G20*	[mbar]	20	20	20	20	20	20	20	20
POTROŠNJA TNG *LPG CONSUMPTION G31*	[m^3/h - kg/h]	3,127 - 6,10	4,191 - 8,07	5,436 - 10,53	6,976 - 13,59	8,819 - 17,17	5,436 - 10,53	6,976 - 13,59	8,819 - 17,17
ULAZNI PRITISAK *INLET PRESSURE G31*	[mbar]	30/37	30/37	30/37	30/37	30/37	30/37	30/37	30/37
ELEKTRIČNO NAPAJANJE *ELECTRICAL POWER*	[V - ph - Hz]	230-1-50	230-1-50	230-1-50	230-1-50	230-1-50	400-3-50 (230-3-50)◆	400-3-50 (230-3-50)◆	400-3-50 (230-3-50)◆
ELEKTRIČNA SNAGA *POWER CONSUMPTION*	[W]	670	1.190	1.570	1.550	2.550	1.500	1.550	2.500
Ø DIMNJAKA *Ø FLUE*	[mm]	150	150	200	200	200	200	200	200
Ø IZLAZA VAZDUHA PERFORIRAN / MAKS. D. *Ø OUTLET PREFORATED DUCT/ L.MAX ***	[mm/m] 1 PRAVAC	500/100	500/100	600/100	700/100	700/100	600/100	700/100	700/100
	[mm/m] 2 PRAVCA	400/50	400/50	500/50	500/50	600/50	500/50	500/50	600/50
Ø KANAL SNORKEL / MAKS. D. *Ø OUTLET SNORKEL / L. MAX*	[mm/m]	100/5	100/5	100/5	100/5	150/5	100/6	100/6	150/6
Ø KANAL ZA POVRAT VAZDUHA / MAKS. D. *Ø INLET HOSE / L. MAX*	[mm/m]	510/6	570/6	650/6	650/6	720/6	650/6	650/6	720/6

***** Mašina bez gorionika i izlaza vazduha - *Machine without burner and air adapter*
****** Vidi str. 101 - *See page 101*
◆ Dostupno na zahtev - *Available on demand*

PAKOVANJE/*PACKAGING*

FARM 85		
	FARM rasklopljeni horizontalni * *FARM horizontal disassembled* *	FARM montirani horizontalni sa pakovanjem i paletom * *FARM horizontal, assembled with carton box and pallet* *
KONTEJNER 20′	27	16
KONTEJNER 40′	60	32
KONTEJNER 40′ HC	60	48
TIR	66	69

FARM 110		
	FARM rasklopljeni horizontalni * *FARM horizontal disassembled* *	FARM montirani horizontalni sa pakovanjem i paletom * *FARM horizontal, assembled with carton box and pallet* *
KONTEJNER 20′	24	12
KONTEJNER 40′	51	28
KONTEJNER 40′ HC	51	42
TIR	60	48

FARM 145		
	FARM rasklopljeni horizontalni * *FARM horizontal disassembled* *	FARM montirani horizontalni sa pakovanjem i paletom * *FARM horizontal, assembled with carton box and pallet* *
KONTEJNER 20′	14	12
KONTEJNER 40′	30	28
KONTEJNER 40′ HC	42	28
TIR	38	28

FARM 185		
	FARM rasklopljeni horizontalni * *FARM horizontal disassembled* *	FARM montirani horizontalni sa pakovanjem i paletom * *FARM horizontal, assembled with carton box and pallet* *
KONTEJNER 20′	10	8
KONTEJNER 40′	20	20
KONTEJNER 40′ HC	30	20
TIR	22	22

FARM 235		
	FARM rasklopljeni horizontalni * *FARM horizontal disassembled* *	FARM montirani horizontalni sa pakovanjem i paletom * *FARM horizontal, assembled with carton box and pallet* *
KONTEJNER 20′	8	8
KONTEJNER 40′	18	16
KONTEJNER 40′ HC	18	16
TIR	20	20

* Maksimalna količina se proverava u zavisnosti od izabrane dodatne opreme - *Maximum values to be verified depending on the chosen accessories*