BIEMMEDUE
heating, cleaning and drying



GE

MOBILNI GENERATORI TOPLOG VAZDUHA, DIREKTNO SAGOREVANJE

DIRECT COMBUSTION MOBILE SPACE HEATERS

ECO Steam · Vojvode Putnika 43, Trnava, 35000 Jagodina · tel. +381 63 640 101 · info@eco-steam.rs · www.eco-steam.rs

GE - MOBILNI GENERATORI TOPLOG VAZDUHA, DIREKTNO SAGOREVANJE

- Integrisani gorionik na dizel gorivo
- Elektronska kontrola plamena
- Termostat za zaštitu od pregrevanja
- Utičnica za povezivanje sa termostatom, higrostatom ili tajmerom (GE 36, GE 46, GE 65, GE 105)
- Kabl za električno napajanje (1,5 m) sa utikačem
- Komora sagorevanja od INOX čelika AISI 430
- Vremenski podešeno naknadno provetravanje za hlađenje komore sagorevanja
- Cevi za dovod dizel goriva od gume otporne na ugljovodonike sa oklopom od tekstilnog pletiva (GE 20, GE 36, GE 46), metalnog (GE 65, GE 105)
- Rezervoar od PE otpornog na udar (GE 20, GE 36, GE 46), od čelika (GE 65, GE 105)
- Čep rezervoara na bajonet
- Čep za ispuštanje goriva iz rezervoara

- *Build-in diesel burner*
- *Electronic flame-control*
- *Safety thermostat*
- *Set to be connected to a thermostat or a humidistat or a timer (GE 36, GE 46, GE 65, GE 105)*
- *Power cord (1,5 m) with plug*
- *AISI 430 stainless steel combustion chamber*
- *Automatic post ventilation of unit*
- *Fuel feed lines in hydrocarbon resistant rubber, whit a reinforced textile (GE 20, GE 36, GE 46) or metal sheath (GE 65, GE 105)*
- *Tank in tough hydrocarbon resistant polythene (GE 20, GE 36, GE 46) or steel (GE 65, GE 105)*
- *Bayonet-type fuel tank cap*
- *Fuel tank drain plug*













DODATNA OPREMA NA ZAHTEV / *ACCESSORIES ON DEMAND*

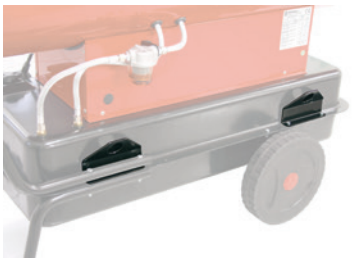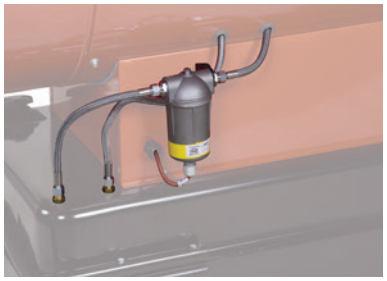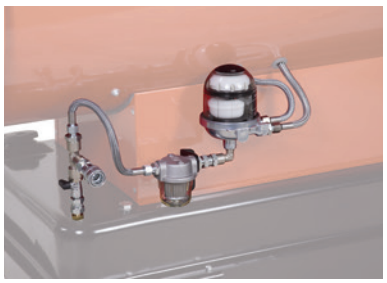INDIKATOR NIVOA ***FUEL LEVEL GAUGE***	**FILTER ZA PUNJENJE REZERVOAR ZA DIZEL GORIVO** ***FUEL TANK FILLER FILTER***	**NOSAČI ZA PODIZANJE (4 KOM)** ***LIFTING BRACKETS (4 PIECES)***
		
Mod. GE 36 - GE 46 - GE 65 - GE 105 **Šif.** 02AC508	**Mod.** GE 36 - GE 46 - GE 65 - GE 105 **Šif.** 02AC556	**Mod.** GE 65 - GE 105 **Šif.** 02AC511
KOMPLET PNEUMATSKIH TOČKOVA Ø 250 mm ***PNEUMATIC WHEELS KIT Ø 250 mm***	**SOBNI TERMOSTAT +5/+30°C SA KABLOM L=10 m I UTIKAČEM 90°** ***ROOM THERMOSTAT +5/+30°C CABLE 10 m, PLUG 90°***	**TERMOSTAT POLJOPRIVREDA/GRAĐILIŠTE -5/+50°C SA KABLOM L=10 m I UTIKAČEM 90°** ***HEAVY DUTY THERMOSTAT -5/+50°C CABLE 10 m, PLUG 90°***
		
Mod. GE 65 **Šif.** 02AC598 **Mod.** GE 105 **Šif.** 02AC599	**Šif.** 02AC581	**Šif.** 02AC582
KOLICA, DRŠKA I TOČKOVI ***TROLLEY, HANDLE AND WHEELS***	**FILTER ZA DIZEL GORIVO SA GREJAČEM** ***PRE-HEATED FUEL FILTER***	**KOMPLET ZA SPOLJNI REZERVOAR, JEDNOCEVNI, SA ODVAZDUŠIVAČEM** ***SINGLE-PIPE EXTERNAL FUEL TANK CONNECTION KIT WITH DE-AERATOR***
		
Mod. GE 20 **Šif.** 02AC596	**Mod.** GE 65 - GE 105 **Šif.** 02AC548	**Mod.** GE 65 - GE 105 **Šif.** 02AC632


GE - MOBILNI GENERATORI TOPLOG VAZDUHA, DIREKTNO SAGOREVANJE
DIRECT COMBUSTION MOBILE SPACE HEATERS




TEŽINA I DIMENZIJE MAŠINE *WEIGHTS AND DIMENSIONS MACHINE*					PAKOVANJE *PACKAGING*			
MOD	A	B	C	Neto/*Net*	X	Y	H	Bruto/*Gross*
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
GE 20	720	300	450	20	760	320	425	23
GE 36	1.075	440	615	25	1.050	400	520	29
GE 46	1.075	440	630	38	1.050	400	580	45
GE 65	1.200	555	860	58	1.200	480	892	66
GE 105	1.492	670	1.005	86	1.690	620	1.050	107

		GE 20	GE 36	GE 46	GE 65	GE 105
šifra - *code*		02GE131	02GE102	02GE103	02GE104	02GE105
nazivna toplotna snaga - *rated heat power*	Hs [kW] Hs [kcal/h - BTU/h]	21,4 18.369 - 73.110	38,4 33.043 - 131.512	49 42.173 - 167.850	69,3 59.565 - 237.067	111,1 95.507 - 380.331
stepen korisnosti - *heat efficiency*	[%]	100	100	100	100	100
protok vazduha - *air flow*	[m^3/h]	350	605	1400	2500	4600
temperatura vazduha - *air temperature*	pri 20°C [°C]	92	98	84	77	68
potrošnja - *fuel consumption*	[kg/h]	1,69	3,04	3,88	5,48	8,85
zapremina rezervoara - *tank capacity*	[l]	17	42	42	65	105
električna snaga - *power consumption 230 V*	[W]	200	232	400	598	1170
električno napajanje - *electrical power*	[V - ph - Hz]	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
količina po paleti - *pallet quantities*	[kom - *pcs*]	20	12	9	1	1

Električna komandna tabla / *Electrical control board*

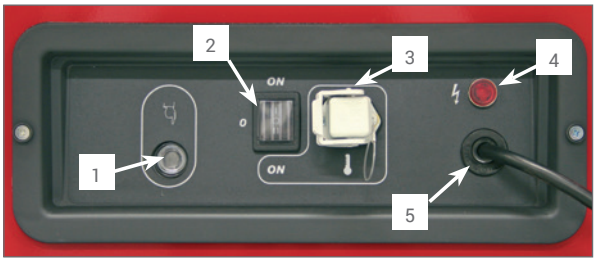

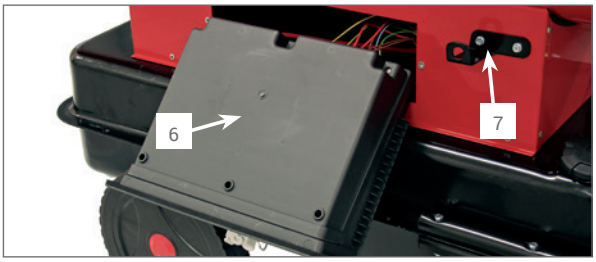

Legenda

1 Taster za reset sa lampicom blokade (crvena), rada (zelena) i stand-by (narandžasta)

2 Komandni prekidač sa tri položaja:
- položaj 0 za zaustavljenu mašinu,
- položaj 1 za mašinu u radu u "kontinuiranom" radu
- položaj 2 za mašinu u radu sa sobnim termostatom, higrostatom, tajmerom

3 Utičnica za sobni termostat, higrostat, tajmer

4 Signalna lampica napona

5 Izlaz mrežnog kabla

6 Poklopac (GE-GE/S 65,GE-GE/S 105, EC-EC/S 55, EC-EC/S 85)

7 Nosač električnog kabla

Legend

1 Reset button with block (red), working (green) and stand-by (orange) indicator light

2 Three way control switch:
- *position 0 for stop*
- *position 1 for "continuous" on*
- *position 2 for on with ambient thermostat, humidistat, timer*

3 Socket for ambient thermostat, humidistat, timer

4 Voltage warning light (connected to the mains)

5 Power cord outlet

6 Plastic cover (GE-GE/S 65,GE-GE/S 105, EC-EC/S 55, EC-EC/S 85)

7 Power cord bracket

BIEMMEDUE S.p.A. Via Industria, 12 - 12062 Cherasco (CN) - Italy - T. +39 0172 486111 - F. +39 0172 488270
bm2@biemmedue.com - www.biemmedue.com