BM2 BIEMMEDUE
heating, cleaning and drying



SVI/*ALL* | E (ELEKTRIČNI) | 4S

MOTALICA/HOSE REEL
OPCIONO

500/15 E
200/41 E
350/23 E

NEW

200/41 4S
500/15 4S
350/23 4S



PARAURTI ANTERIORE
FRONT BUMPER
OPTIONAL

MAGNUM

INDUSTRIJSKI PERAČI POD PRITISKOM, HLADNA VODA, VISOK PRITISAK/PROTOK

INDUSTRIAL COLD WATER PRESSURE CLEANERS HIGH PRESSURE/HIGH FLOW


MAGNUM - INDUSTRIJSKI PERAČI POD PRITISKOM, HLADNA VODA, VISOK PRITISAK/PROTOK

- Pumpe sa klipnjačom, keramičkim klipovima i glavom od mesinga
- Motori 1450 rpm visoke efikasnosti (verzija E)
- Pokretanje motora zvezda-trougao (verzija E)
- Termomagnetni zaštitni prekidač motora (verzija E)
- Odloženo potpuno zaustavljanje (verzija E)
- Sekundarno kolo upravljanja/komande niskog napona 24 V (verzija E)
- Brojač radnih sati
- By-pass ventil i regulacija sa lakim ponovnim pokretanjem (easy start mod. 500 Bar)
- Sigurnosni ventil (mod. 500 Bar)
- Cevasta konstrukcija plastificirana prahom i poklopac od nerđajućeg čelika AISI 304
- Filter za vodu sa samočišćenjem
- Teški točkovi (2x300 mm - 2x400 mm)
- 4 kuke za podizanje
- Držač koplja u serijskoj opremi
- Parkirna kočnica sa sigurnosnom blokadom
- Termostatski sigurnosni ventil (mod. 4S)
- Koplje sa dvostrukom drškom (mod. 500 Bar / 7100 psi)
- Dizna od nerđajućeg čelika sa keramičkim umetkom (mod. 500 Bar / 7100 psi)

- *Triplex plunger pump with three ceramic pistons and brass head*
- *1450 rpm motor (E version)*
- *Star-delta motor starter (E version)*
- *Motor protective circuit breaker (E version)*
- *Delayed total stop (E version)*
- *Secondary control circuit 24 Volt low voltage*
- *Hours counter (E version)*
- *By Pass Valve with easy start (mod. 500 Bar)*
- *Safety relief valve (mod. 500 Bar)*
- *Powder coated metal frame with AISI 304 cover*
- *Self-cleaning Inlet water filter*
- *Heavy duty wheels (2x300 mm - 2x400 mm)*
- *4 lifting hooks on models*
- *Lance holder*
- *Parking brake with safety lock*
- *Thermal relief safety valve (mod. 4S)*
- *Lance with swivel side grip holder*
- *Stainless steel nozzle with ceramic tip (mod. 500 Bar / 7100 psi)*






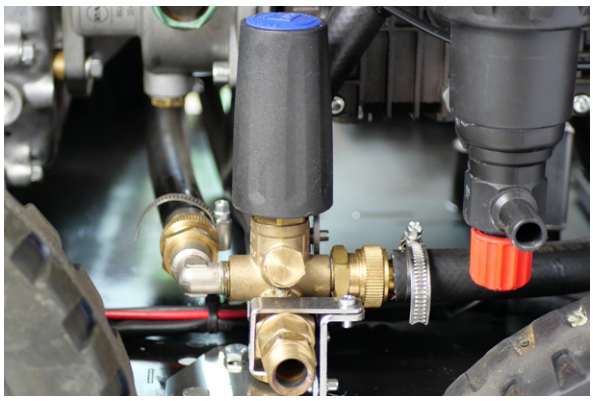






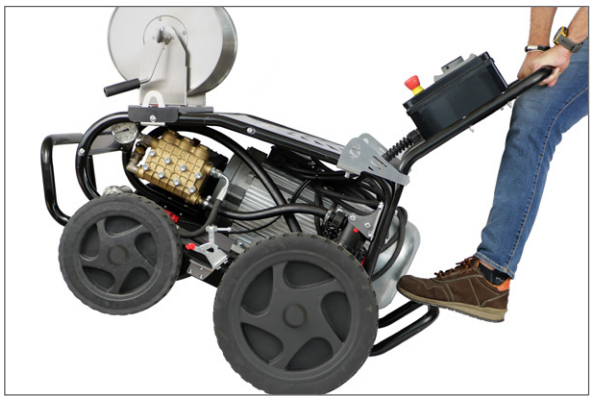

Zadnji branik u serijskoj opremi - *Rear bumper supplied*

SERIJSKA OPREMA / *SUPPLIED ACCESSORIES*

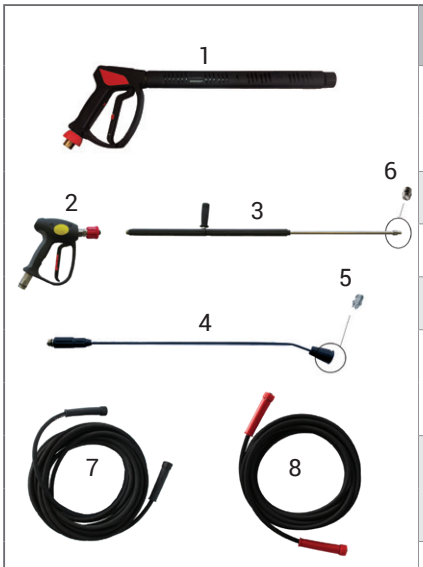

N°	MOD.	ŠIFRA	OPIS - *DESCRIPTION*
1	200/41	01AC422	Pištolj sa polukopljem i obrtnim spojem (ulaz M22 izlaz M22) *Spray gun with Semilance and swivel (in M22 out M22)*
	350/23	01AC447	Pištolj sa polukopljem i obrtnim spojem (ulaz M22 izlaz M22) *Spray gun with Semilance and swivel (in M22 out M22)*
2	500/15	01AC507	Pištolj M24-M24 *Spry gun M24-M24*
3	500/15	01AC504	Koplje L1200 inox M24x1,5 - 1/4" F *Lance L1200 M24x1,5 - 1/4" F - inox*
4	200/41-350/23	01AC419	Koplje INOX l=70 cm ulaz M22 izlaz 1/4"F *Stainless steel lance l=70 cm in M22 out 1/4"F*
5	200/41	B.CCID00067	Dizna 1/4" - *Nozzle 1/4" 30130*
	350/23	I50216	Dizna 1/4" - *Nozzle 1/4"M 2505*
6	500/15 E	I50440	Dizna 1/4" 15025 sa keramičkim umetkom *Nozzle 1/4" 15025 with ceramic tip*
	500/15 4S	I50441	Dizna 1/4" 1503 sa keramičkim umetkom *Nozzle 1/4" 1503 with ceramic tip*
7	200/41-350/23	01AC502	Crevo V.P. - *H.P. Hose 3/8" l=15 m R2 - 5/16" M22 - M22*
8	500/15	01AC500	Crevo V.P. - *H.P. Hose 3/8" (500 BAR) l=15 m M24 - M24*

DODATNA OPREMA NA ZAHTEV / *ACCESSORIES ON DEMAND*

MOTALICA INOX 40m
STAINLESS STEEL *HOSE REEL 40m*



Mod. 200/41 EL - 350/23 EL
Šifra 01AC011

Mod. 500/15 EL
Šifra 01AC012

Mod. 200/41 4S - 350/23 4S
Šifra 01AC013


Mod. 500/15 4S
Šifra 01AC014

PREDNJI BRANIK
FRONT BUMPER



Mod. Svi /*All*
Šifra 01AC015


KOPLJE SA PROMENLJIVIM MLAZOM (RAVAN/KONUSNI)
VARIABLE SPRAY LANCE (STRAIGHT/CONE JET)

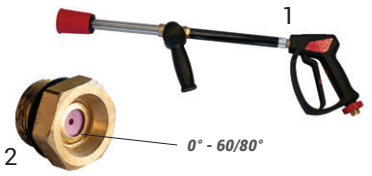

Mod. 200/41 Koplje - *Lance* 1
Šifra 01AC505

Mod. 200/41 Dizna - *Nozzle* (1,5) 2
Šifra I50337

KOMPLET ROTIRAJUĆE TURBO DIZNE
TURBO NOZZLE KIT

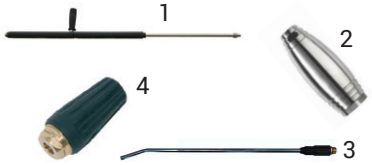

Mod. 500/15 Koplje/*Lance* M24x1,5 - 1/4" F 1
Šifra 01AC612

Mod. 500/15 E Dizna - *Nozzle (025)* 2
Šifra 01AC326


Mod. 500/15 4S Dizna - *Nozzle (03)* 2
Šifra 01AC327

Mod. 350/23 Dizna - *Nozzle (050)* 2
Šifra 01AC466

Mod. 200/41-350/23 Koplje/*Lance* (70 cm) 3
Šifra 01AC514

Mod. 200/41 Dizna - *Nozzle (120)* 4
Šifra 01AC331

KOMPLET ZA PESKARENJE
SANDBLASTING KIT (500 BAR - 7100 PSI)

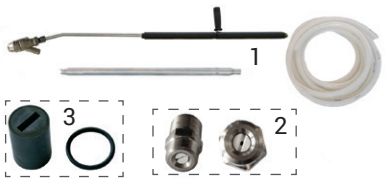

Mod. 500/15 1
Komplet za peskarenje - Sandblasting kit
Šifra 01AC527

Mod. 500/15 2
Keramička dizna - *Ceramic tip nozzle 15025 1/4"*
Šifra I50440

Mod. 500/15 3
Rezervna dizna za pesak - *Nozzle sand 15025 1/4"*
Šifra 01AC562

PESAK (25 KG)
SAND (25 KG)




Mod. Svi/All
Pesak - *Sand (25 kg)*
Šifra 01AC284

MAGNUM - INDUSTRIJSKI PERAČI POD PRITISKOM, HLADNA VODA, VISOK PRITISAK/PROTOK
INDUSTRIAL COLD WATER PRESSURE CLEANERS HIGH PRESSURE/HIGH FLOW

BATERIJE
BATTERIES



Mod. Svi modeli 4S / *All 4S models*
Baterija / Battery (12V - 50 Ah)
mm 210x180x190
Šifra 121AC132

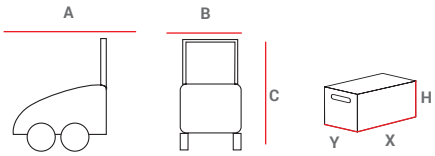

TEŽINA I DIMENZIJE MAŠINE *WEIGHTS AND DIMENSIONS MACHINE*					PAKOVANJE *PACKAGING*			
MOD	A	B	C	Neto/*Net*	X	Y	H	Bruto/*Gross*
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
MAGNUM 500/15 E	1.010	730	1.007	150	1.200	800	1.140	165
MAGNUM 200/41 E	1.010	730	1.007	145	1.200	800	1.140	160
MAGNUM 350/23 E	1.010	730	1.007	145	1.200	800	1.140	160
MAGNUM 500/15 4S	1.010	730	1.007	135	1.200	800	1.140	150
MAGNUM 200/41 4S	1.010	730	1.007	130	1.200	800	1.140	145
MAGNUM 350/23 4S	1.010	730	1.007	130	1.200	800	1.140	145

		500/15 E	350/23 E	200/41 E	500/15 4S	350/23 4S	200/41 4S
šifra - *code*		● 01MG400	● 01MG200	● 01MG000	● 01MG440	● 01MG240	● 01MG040
maks. pritisak *max. pressure*	[bar] [Mpa - psi]	500 50-7250	350 35-5070	200 20-2900	500 50-7250	350 35-5070	200 20-2900
maks. protok *max. flow rate*	[lt/h]	900	1.380	2.460	900	1.380	2.460
pumpa - *pump*		IP 66 HP	IP 66	IP 66	IP 66 HP	IP 66	IP 66
motor - *motor*	tip	električni *electric*	električni *electric*	električni *electric*	HONDA	HONDA	HONDA
	mod.				GX690	GX690	GX690
	KS maks.	-	-	-	22	22	22
	KS neto	-	-	-	17	17	17
pokretanje motora *engine start*		zvezda-trougao *star-delta*	zvezda-trougao *star-delta*	zvezda-trougao *star-delta*	električni/ *electric(*)*	električni/ *electric(*)*	električni/ *electric(*)*
maks. potrošnja snage *max. absorbed power*	[Kw]	15,1	15,7	16,2	-	-	-
sistem zaustavljanja *stop system*		TSD	TSD	TSD	autom. usporivač / *aut. speed reducer*	autom. usporivač / *aut. speed reducer*	autom. usporivač / *aut. speed reducer*
broj obrtaja pumpe *pump speed*	rpm	1.450	1.450	1.450	1.450	1.450	1.450
napajanje *supply voltage*	[V-ph-Hz]	400-3-50	400-3-50	400-3-50	benzin *gasoline*	benzin *gasoline*	benzin *gasoline*
kapacitet rezervoara za gorivo *fuel tank capacity*	[lt]	-	-	-	7	7	7
maks. temp. napajanja - *max. inlet temp.*	[°C]	40	40	40	40	40	40

(*) Baterija NIJE uključena - *Battery NOT included*

BIEMMEDUE S.p.A. Via Industria, 12 - 12062 Cherasco (CN) - Italy - T. +39 0172 486111 - F. +39 0172 488270
bm2@biemmedue.com - www.biemmedue.com