BIEMMEDUE
heating, cleaning and drying



MAXIM 40-70 M OIL

PROFESIONALNI USISIVAČ ZA TEČNOSTI ZA ODVAJANJE I SKUPLJANJE EMULGOVANOG ULJA I STRUGOTINE

PROFESSIONAL VACUUM CLEANER FOR PICK-UP AND SEPARATION OF EMULSIFIED OIL AND CHIPPINGS

MAXIM 40-70 M OIL - PROFESIONALNI USISIVAČ ZA TEČNOSTI ZA ODVAJANJE I SKUPLJANJE EMULGOVANOG ULJA I STRUGOTINE

PROFESSIONAL VACUUM CLEANER FOR PICK-UP AND SEPARATION OF EMULSIFIED OIL AND CHIPPINGS

- Profesionalni usisivač za tečnosti, posebno projektovan za skupljanje i odvajanje emulgovanog ulja i strugotine
- Idealan za mašinske radionice, strugarske radionice i radionice za obradu metala
- Usisavanje odozgo olakšava prolaz tečnosti i strugotine i omogućava maksimalno iskorišćenje snage i protoka motora
- Ulje i strugotina stižu direktno i bez prepreka u poseban umetak za odvajanje strugotine, gde se strugotina odvaja od ulja i zadržava, dok se ulje taloži u rezervoaru
- Na taj način se strugotina lako vadi uklanjanjem umetka sa strugotinom
- Robusna konstrukcija, rezervoar od nerđajućeg čelika na čvrstoj čeličnoj bazi sa točkovima
- Isključivo za upotrebu sa tečnostima

- *Professional vacuum cleaner designed specifically for the recovery and separation of emulsified oil and chippings*
- *Ideal for use in metal working shops, with lathes and in metal forming factories*
- *Upper vacuum entry facilitates the passage of liquids and chippings, allowing for the maximum expression of the power and air flow of the motor*
- *Oil and chippings arrive directly and without impediment into the special separation insert, where the chippings are deposited and separated from the liquids, while the liquid components are drained into the tank*
- *In this way the chippings can be easily recovered by extracting the separation insert*
- *Sturdy construction, stainless steel tank mounted on a resistant steel wheel base*
- *To be used exclusively for liquid pick-up*








SERIJSKA OPREMA / *SUPPLIED ACCESSORIES*

	ŠIFRA	OPIS - *DESCRIPTION*
	004.499.012	Antistatički najlonski filter *Antistatic nylon filter*
	004.410	Filter od sunđera *Sponge filter*
	004.499.009	Fleksibilno crevo Ø 40 mm, kompletno, za MAXIM 40M OIL *Flexible hose diam.40 mm complete for MAXIM 40M OIL*
	004.095	Pljosnata mlaznica otporna na ulje Ø 40 mm *Oil-resistant crevice nozzle diam.40 mm*
	004.399.019	Separator strugotine od nerđajućeg čelika *Metal shavings filtration device in inox*

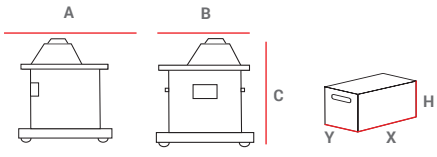

TEŽINA I DIMENZIJE MAŠINE *WEIGHTS AND DIMENSIONS MACHINE*					PAKOVANJE *PACKAGING*			
MOD	A	B	C	Neto/*Net*	X	Y	H	Bruto/*Gross*
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
MAXIM 40M OIL	420	420	710	17	474	474	760	19
MAXIM 70M OIL	425	610	920	21	500	500	950	23

		MAXIM 40 M OIL	MAXIM 70 M OIL
šifra - *code*		008.311	008.475
maks. snaga - *max. power*	[W]	1.200	1.200
napajanje - *power supply*	[V - ph - Hz]	230-1-50/60	230-1-50/60
tip motora /br. motora- *motor type/n° of motors*	[br.]	BP-1	BP-1
podpritisak - *water lift*	[mm H_2O]	2.400	2.400
protok vazduha - *air flow*	[m^3/h]	220	220
zapremina posude u litrima - *tank volume in liters*	[l]	40	70
materijal posude - *tank material*		SS 430	SS 430
nivo buke - *noise level*	[dBA]	65	65
prečnik pribora - *accessories diameter*	[mm]	40	40
dužina električnog kabla - *electric cable lenght*	[m]	7	7
dimenzije palete - *pallet dimensions*	[cm]	110X130X160	103X103X208
količina po paleti - *pallet quantities*	[kom - pcs]	12	8

BP = Dvostepeni sa bypass hlađenjem - *2 stage with bypass cooling*
SS 430 = Nerđajući čelik AISI 430 - *Stainless steel AISI 430*

ECO Steam · Vojvode Putnika 43, Trnava, 35000 Jagodina · tel. +381 63 640 101 · info@eco-steam.rs · www.eco-steam.rs