



SVI - ALL

130/10
160/15

140/30
180/18
200/15
200/20
200/21
200/30
300/21
350/15

MOTALICA/HOSE REEL
OPCIONO

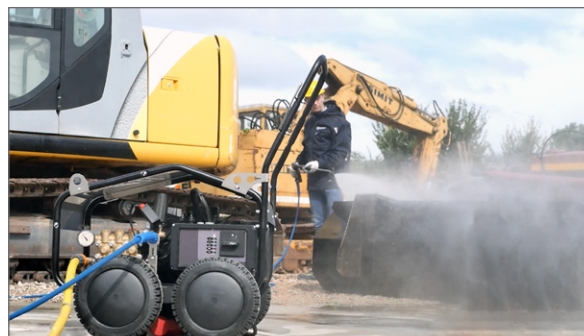
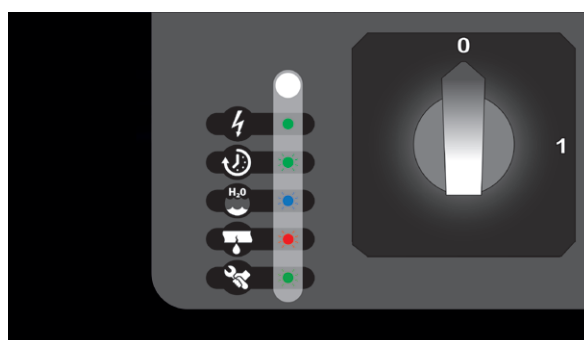


MAXIMA

PROFESIONALNI PERAČI POD PRITISKOM SA HLADNOM VODOM
PROFESSIONAL COLD WATER HIGH PRESSURE CLEANERS

MAXIMA - PROFESIONALNI PERAČI POD PRITISKOM SA HLADNOM VODOM




- Pumpe sa klipnjačom, keramičkim klipovima i glavom od mesinga
- Motori 1450 rpm
- Motor visoke efikasnosti
- Sistem zaštite spojnice vratila motor-pumpa (SJ) za modele 130/10 i 160/15
- Prenos sa elastičnom spojnicom za modele od 180 do 350 bar (FJ)
- Termička zaštita motora
- Odloženo potpuno zaustavljanje (TSD) za 130/10 i 160/15
- Napredna kontrola mašine (ACDS2) za modele 140/30 i od 180 do 350 bar sa mogućnošću povezivanja na dijagnostički čitač (str. 104)
- Kontrola curenja (ACDS2) za modele 140/30 i od 180 do 350 bar
- Automatsko gašenje nakon 20 min neupotrebe (ACDS2) za modele 140/30 i od 180 do 350 bar
- LED signalizacija «mašina spremna» i «greška» (ACDS2) za modele 140/30 i od 180 do 350 bar
- Pamćenje vremena rada mašine sa LED signalizacijom pri dostizanju planiranog intervala održavanja (ACDS2) za modele 140/30 i od 180 do 350 bar
- Kontrola nedostatka vode sa LED signalizacijom za modele 140/30 i od 180 do 350 bar
- Lakirana cevasta konstrukcija sa poklopcem od nerđajućeg čelika AISI 430
- 4 točka od 260 mm
- Parkirna kočnica na pedalu
- Manometar
- Filter za vodu sa lakim pristupom
- Držač koplja u serijskoj opremi
- 4 kuke za podizanje
- Priprema za motalicu (opciono)
- Triplex plunger pump with three ceramic pistons and brass head
- 1450 rpm motor
- High efficiency motor with double thermal protection
- Motor/pump coupling protection with special lubricant retention system (SJ) on model 130/10 - 160/15
- Models from 180 to 350 bar equipped with Flexible Joint (FJ)
- Delayed total stop (TSD) on models 130/10-160/15
- (ACDS2) Advanced Control Delayed Stop on models 140/30 and from 180 to 350 bar ready for connection to diagnostic reader (page 104)
- (ACDS2) Micro leakage control on models 140/30 and from 180 to 350 bar
- (ACDS2) Automatic shutdown if idle for more than 20 min on models 140/30 and from 180 to 350 bar
- (ACDS2) Warning led "machine ready" and "malfunction" on models 140/30 and from 180 to 350 bar
- (ACDS2) Hour counter device with service alert warning led on models 140/30 and from 180 to 350 bar
- "No water" led signal with automatic machine switch off
- Powder coated Metal Frame with AISI 430 cover
- Heavy duty 260 mm wheels
- Parking brake pedal
- Pressure gauge
- Easy to inspect water filter
- Lance Holder
- 4 Lifting hooks
- Hose reel (optional)



SERIJSKA OPREMA / SUPPLIED ACCESSORIES

	N°	MOD.	ŠIFRA	OPIS - DESCRIPTION
	1	130/10 - 350/15	I50276	Dizna - Nozzle 1/4" M 25035
		140/30	I50278	Dizna - Nozzle 1/4" M 25125
		160/15	I50205	Dizna - Nozzle 1/4" M 25055
		180/18 - 200/20	I50295	Dizna - Nozzle 1/4" M 25065
		200/15 - 300/21	I50216	Dizna - Nozzle 1/4" M 25050
		200/21	I50274	Dizna - Nozzle 1/4" M 25070
		250/15	I50202	Dizna - Nozzle 1/4" M 25040
		200/30	I50218	Dizna - Nozzle 1/4" M 25100
	2	Svi - All (bez 30 l)	B.RCVR00170	Brzi priključak za crevo 1/2" - 1/2" Hose connector
	3	Svi - All (bez 30 l)	B.RCVR00169	Slavinski nastavak za crevo 3/4" - Threaded tap adaptor 3/4"
	4	140/30-200/30	B.CCID00056	Bajonet priključak 3/4" - Bayonet connection 3/4"
	5	140/30-200/30	003.466	Brzi priključak za crevo 1" - 1" Hose connector


DODATNA OPREMA NA ZAHTEV/ ACCESSORIES ON DEMAND

KOMPLET BASIC BASIC KIT	KOMPLET PREMIUM PREMIUM KIT	KOMPLET PREMIUM (HF-HP) PREMIUM KIT (HF-HP)
 l= 10m	 l= 10m	 l= 10/15m
Mod. 130/10 - 160/15 Crevo - Hose (R1) Šifra 01AC008 (01AC418(1)+01AC319(2)+01AC401(3))	Mod. 180/18 Crevo - Hose (R1) Šifra 01AC009 (01AC422(1)+01AC419(2)+01AC401(3)) Mod. 200/15-200/20-200/21-250/15-200/30 - 300/21 - Crevo - Hose (R2) Šifra 01AC023 (01AC422(1)+01AC419(2)+01AC398(3))	Mod. 140/30 Crevo - Hose (R2 HF / l= 15 m) Šifra 01AC024 (01AC422(1)+01AC419(2)+01AC502(3)) Mod. 350/15 Crevo - Hose (R2 / l=10 m) Šifra 01AC027 (HP) (01AC447(1)+01AC419(2)+01AC398(3))
KOMPLET DIZNE ZA ODČEPLJIVANJE CEVI RETRO NOZZLE KIT	KOMPLET ROTIRAJUĆE TURBO DIZNE TURBO NOZZLE KIT	KOMPLET ZA PESKARENJE SANDBLASTING KIT
		
Mod. 130/10 - 140/30 - 160/15 - 180/18 - 200/15-200/20-200/21-200/30 (maks. 200 bar) Crevo - Hose (15 m) Šifra 01AC376	Mod. Svi-All Koplje - Lance (70 cm) Šifra 01AC514 Mod. 130/10 - Dizna - Nozzle (035) Šifra 01AC293	Mod. 130/10 - 350/15 (035= 1,3 mm) Šifra 01AC473*
Mod. 250/15 - 300/21 - 350/15 Crevo - Hose (15 m) Šifra 01AC615	Mod. 140/30 - Dizna - Nozzle (12) Šifra 01AC331 Mod. 160/15 - Dizna - Nozzle (055) Šifra 01AC347	Mod. 160/15 - 300/21 (050= 1,6 mm) Šifra 01AC476*
Mod. 130/10 - 250/15 - 350/15 Dizna - Nozzle (04) Šifra 01AC471	Mod. 180/18 - 200/20 - Dizna - Nozzle (065) Šifra 01AC297 Mod. 200/15 - 300/21 - Dizna - Nozzle (050) Šifra 01AC466	Mod. 200/15 (045= 1,5 mm) Šifra 01AC475*
Mod. 160/15 - 200/15 - 300/21 Dizna - Nozzle (045) Šifra 01AC403	Mod. 200/21 - Dizna - Nozzle (070) Šifra 01AC298 Mod. 200/30 - Dizna - Nozzle (10) Šifra 01AC355	Mod. 180/18 - 200/20 - 200/21 (060= 1,7 mm) Šifra 01AC478*
Mod. 180/18 - 200/20 Dizna - Nozzle (065) Šifra 01AC404	Mod. 250/15 - Dizna - Nozzle (04) Šifra 01AC493 Mod. 350/15 - Dizna - Nozzle (03) Šifra 01AC450	Mod. 250/15 (040= 1,4 mm) Šifra 01AC474*
Mod. 200/21 Dizna - Nozzle (08) Šifra 01AC288		Mod. Svi-All Dizna za pesak - Sand Nozzle (rez. deo - sp) Šifra 01AC480

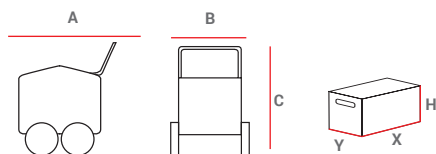
* Dizna uključena u komplet - Nozzle included

MAXIMA - PROFESIONALNI PERAČI POD PRITISKOM SA HLADNOM VODOM

PROFESSIONAL COLD WATER HIGH PRESSURE CLEANERS

PESAK (25 KG) SAND (25 KG)	MOTALICA OD NERĐAJUĆEG ČELIKA AISI 304 - L MAX = 40 m STAINLESS STEEL AISI 304 HOSE REEL L MAX = 40 m	KOMPLET BRTVI PUMPE ZA VISOKU TEMPERATURU PUMP SEALS FOR HIGH TEMPERATURE
		
Mod. Svi-All Šifra 01AC284	Mod. 130/10 - 160/15 - 200/20 Šifra 01AC001	Mod. Maxima 15, 20, 21 lt Šifra B.PMVR00193
	Mod. Ostali modeli - other models Šifra 01AC469	Mod. Maxima 18 lt Šifra B.PMVR00194

TEŽINA I DIMENZIJE MAŠINE WEIGHTS AND DIMENSIONS MACHINE					PAKOVANJE PACKAGING			
MOD	A	B	C	Neto/Net	X	Y	H	Bruto/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
MAXIMA 130/10	810	610	930	50	700	650	750	61
MAXIMA 140/30	810	610	930	80	700	650	750	90
MAXIMA 160/15	810	610	930	60	700	650	750	70
MAXIMA 180/18	810	610	930	74	700	650	750	84
MAXIMA 200/15	810	610	930	77	700	650	750	87
MAXIMA 200/20	810	610	930	80	700	650	750	93
MAXIMA 200/21	810	610	930	93	700	650	750	106
MAXIMA 250/15	810	610	930	106	700	650	750	119
MAXIMA 200/30	810	610	930	106	700	650	750	119
MAXIMA 300/21	810	610	930	110	700	650	750	124
MAXIMA 350/15	810	610	930	111	700	650	750	125



		130/10	140/30	160/15	180/18	200/15	200/20	200/21	250/15	200/30	300/21	350/15
šifra code		●01MX010	●01MX050	●01MX100	●01MX150	●01MX200	●01MX250	●01MX300	●01MX400	●01MX350	●01MX450	●01MX500
maks. pritisak max. pressure	[bar] [MPa - psi]	130 13-1.880	140 14-2.031	160 16-2.300	180 18-2.600	200 20-2.900	200 20-2.900	200 20-2.900	250 20-2.900	200 20-2.900	300 30-4.350	350 35-5.070
maks. protok max. flow rate	[lt/h]	600	1.800	900	1.080	900	1.200	1.260	900	1.800	1.260	900
pumpa pump		IP E2	IP 47	IP 47	IP 47	IP 47	IP 47	IP 47 N	IP 47	IP 66	IP 66	IP 66 HP
sistem zaustavljanja stop system		TSD	ACDS2	TSD	ACDS2	ACDS2	ACDS2	ACDS2	ACDS2	ACDS2	ACDS2	ACDS2
broj obrtaja pumpe pump speed	[rpm]	1.450	1.450	1.450	1.450	1.450	1.450	1.450	1.450	1.450	1.450	1.450
maks. potrošnja snage max. absorbed power	[Kw]	2,5	7,3	4,5	6,2	6,0	7,3	7,5	6,6	10,1	9,9	11
napajanje supply voltage	[V - ph - Hz]	230-1-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50
maks. temp. napajanja max. inlet temp.	[°C]	40	40	40	40	40	40	40	40	40	40	40