BIEMMEDUE
heating, cleaning and drying





SUPER PLUS

PROFESIONALNI PERAČI POD PRITISKOM SA TOPLOM VODOM

PROFESSIONAL HOT WATER HIGH PRESSURE CLEANERS

SUPER PLUS - PROFESIONALNI PERAČI POD PRITISKOM SA TOPLOM VODOM


- ACDS: Napredna kontrola, odloženo zaustavljanje
- Klipne pumpe sa keramičkim klipovima i mesinganom glavom
- Motor 1450 rpm
- Spoj motor-pumpa preko elastične spojnice


- Ventil za regulaciju pritiska
- Posuda za napojnu vodu sa plovnim ventilom
- Filter za vodu dostupan sa spoljne strane mašine
- Kotao sa stepenom iskorišćenja preko 89%
- Predventilacija kotla
- Kontrola curenja
- Automatsko isključivanje usled nekorišćenja nakon 20 min.
- Termička zaštita motora
- Dva slobodna i dva okretna točka sa kočnicom
- Sistem protiv kamenca podesiv od 35 do 270 mml/h
- Kontrola curenja sa LED signalizacijom
- Kontrola plamena sa LED signalizacijom
- Kontrola nedostatka vode sa LED signalizacijom
- Kontrola nivoa dizel goriva sa LED signalizacijom
- Kontrola nivoa antikamena sa LED signalizacijom
- Prekidač za isključenje kontrola „plamen“ i „automatsko isključivanje“ ako nisu željene
- Pretinac za odlaganje sa pristupom regulaciji ventila
- Pamćenje vremena rada mašine sa LED signalizacijom po dostizanju perioda „redovnog održavanja“
- Priprema za motalicu (opcija)


- *ACDS: Advanced Control with Delayed Stop*
- *Triplex plunger pump with three ceramic pistons and brass head*
- *1450 rpm motor*
- *Motor pump flexible joint*
- *High pressure valve regulation*
- *Built-in water tank with floating valve*
- *Water filter, accessible for inspection from the outside of the machine*
- *Boiler with over 89% efficiency*
- *Pre-ventilation boiler*
- *Micro leakage control*
- *Automatic shutdown if idle for more than 20 min.*
- *Motor thermal protection*
- *Two rigid rear wheels and two front swivel casters with brakes*
- *Limescale prevention system adjustable from 35 to 270 mml/h*
- *Leakage alert led signal*
- *Flame alert led signal*
- *"No water" led signal with automatic machine switch off*
- *Diesel level LED signal*
- *Descaler level LED signal*
- *Automatic shutdown if idle for more than 20 min. with LED signal*
- *Switch to exclude the “flame” and “automatic shutdown” controls if not required*
- *Tool compartment with valve regulation access*
- *Hour counter device with Service alert warning led*
- *Hose reel (optional)*





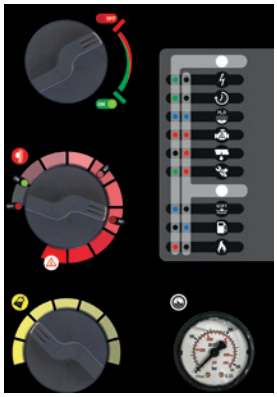







Električna tabla 24 V
24 V Control Panel

OPREMA U ISPORUCI / *SUPPLIED ACCESSORIES*



N°	MOD.	ŠIFRA	OPIS - *DESCRIPTION*
1	Svi - *All*	01AC422	Pištolj sa kratkim kopljem i swivel spojnicom (in M22 out M22) *Spray gun with Semilance and swivel (in M22 out M22)*
2	Svi - *All*	01AC419	Koplje INOX l=70 cm (in M22 out 1/4"F) *Stainless steel lance l=70 cm (in M22 out 1/4"F)*
3	170/15 200/15 200/18 250/15	I50216 I50284 I50205 I50202	Dizna - *Nozzle* 1/4"M 2505 Dizna - *Nozzle* 1/4"M 25045 Dizna - *Nozzle* 1/4"M 25055 Dizna - *Nozzle* 1/4"M 2504
4	170/15	01AC381	Crevo V.P. - *H.P. Hose l=15 m R1 - 5/16" M22 - M22*
	200 - 250	01AC425	Crevo V.P. - *H.P. Hose l=15 m R2 - 5/16" M22 - M22*
5	Svi - *All*	B.RCVR00170	Nastavak za crevo sa brzom spojnicom 1/2" *Hose connector 1/2"*
6	Svi - *All*	B.RCVR00169	Priključak za crevo 3/4" *Threaded tap adaptor 3/4"*
7	Svi - *All*	092P18	1 lt aditiva protiv kamenca *1l limescale inhibitor*
8	Svi - *All*		Ključ *Key*

DODATNA OPREMA NA ZAHTEV/ *ACCESSORIES ON DEMAND*


KOMPLET DIZNE ZA ČIŠĆENJE CEVI *PIPE CLEANING KIT*	KOMPLET ROTIRAJUĆE TURBO DIZNE *TURBO NOZZLE KIT*	KOMPLET ZA PESKARENJE *SANDBLASTING KIT*
		
Mod. Svi - *All* Crevo - *Hose* (15 m) **Šifra** 01AC376	**Mod.** Svi - *All* Koplje - *Lance* (70 cm) **Šifra** 01AC514	**Mod.** 170/15 (05= 1,35 mm) **1** **Šifra** 01AC476*
Mod. 170/15-200/15 Dizna - *Nozzle* (05) **Šifra** 01AC481	**Mod.** 170/15 Dizna - *Nozzle* (05) **Šifra** 01AC296	**Mod.** 200/15 (045= 1,27 mm) **1** **Šifra** 01AC475*
Mod. 200/18 Dizna - *Nozzle* (055) **Šifra** 01AC290	**Mod.** 200/15 Dizna - *Nozzle* (045) **Šifra** 01AC295	**Mod.** 200/18 (06=1,47 mm) **1** **Šifra** 01AC478*
Mod. 250/15 Dizna - *Nozzle* (04) **Šifra** 01AC471	**Mod.** 200/18 Dizna - *Nozzle* (055) **Šifra** 01AC347	**Mod.** 250/15 (04= 1,19 mm) **1** **Šifra** 01AC474*
	Mod. 250/15 Dizna - *Nozzle* (04) **Šifra** 01AC294	**Mod.** Svi-*All* **2** Dizna za pesak - *Sand Nozzle* (rezervni deo - *spare part*) **Šifra** 01AC480

PESAK (25 KG) *SAND (25 KG)*	MOTALICA OD NERĐAJUĆEG ČELIKA AISI 304 - L max =30 m *STAINLESS STEEL AISI 304* *HOSE REEL L max = 30 m*	DOPLATA ZA SERPENTINU OD NERĐAJUĆEG ČELIKA *PRICE INCREASE FOR STAINLESS STEEL HEATING COIL*
		
Mod. Svi - *All* **Šifra** 01AC284	**Mod.** Svi - *All* **Šifra** 01AC467	**Mod.** Svi - *All* **Šifra** 01AC495

* Dizna je uključena u komplet - Nozzle icluded

SUPER PLUS - PROFESIONALNI PERAČI POD PRITISKOM SA TOPLOM VODOM
PROFESSIONAL HOT WATER HIGH PRESSURE CLEANERS

CEV ZA BAJPAS POSUDE ZA VODU *BY-PASS PIPE FOR WATER TANK*	ADAPTER ZA ODVOD DIMNIH GASOVA *EXHAUST PIPE ADAPTOR* Ø 200 mm	CEV ZA ODVOD DIMNIH GASOVA *STAINLESS STEEL EXHAUST PIPE* Ø 200 mm
		
Mod. Svi - *All* **Šifra** 01AC279	**Šifra** 01AC560	**Šifra** 02AC287 l=1m
ZAVRŠETAK DIMNJAKA OD INOX-a *STAINLESS STEEL CHIMNEY POT* Ø 200 mm	**IDRO-CALC ADITIV PROTIV KAMENCA ZA PERAČE POD PRITISKOM** *LIMESCALE INHIBITOR FOR H.P. CLEANERS*	**FIKSNI REDUKTOR PRITISKA** *PRESSURE REDUCER*
		
Šifra 02AC284	**Mod.** Svi - *All* **Šifra** 092P18 01 lt **Šifra** 092P09 10 lt	**Mod.** Svi/*All* **Šifra** B.RIDT00006

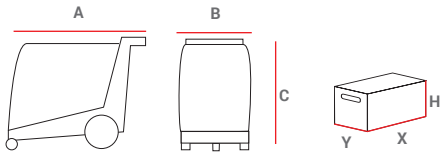

TEŽINA I DIMENZIJE MAŠINE *WEIGHTS AND DIMENSIONS MACHINE*					PAKOVANJE *PACKAGING*			
MOD	A	B	C	Neto/*Net*	X	Y	H	Bruto/*Gross*
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
SUPER PLUS 170/15	956	610	940	146	1.050	720	1.120	164
SUPER PLUS 200/15	956	610	940	151	1.050	720	1.120	169
SUPER PLUS 200/18	956	610	940	156	1.050	720	1.120	174
SUPER PLUS 250/15	956	610	940	156	1.050	720	1.120	174

		170/15	200/15	200/18	250/15
šifra - *code*		01SP09	01SP05	01SP10	01SP08
maks. pritisak - *max. pressure*	[bar] [MPa - psi]	170 17 - 2.460	200 20 - 2.900	200 20 - 2.900	250 25 - 3.600
maks. protok - *max. flow rate*	[lt/h]	900	900	1.080	900
pumpa - *pump*		IP 47	IP 47	IP 47	IP 47
sistem zaustavljanja - *stop system*		ACDS	ACDS	ACDS	ACDS
broj obrtaja pumpe - *pump speed*	[rpm]	1.450	1.450	1.450	1.450
maks. apsorbovana snaga - *max. absorbed power*	[Kw]	5,6	7,2	8	8,1
napajanje - *supply voltage*	[V - ph - Hz]	400-3-50	400-3-50	400-3-50	400-3-50
maks. temperatura - *max. temperature*	[°C]	140	140	140	140
rezervoar za dizel gorivo - *fuel tank*	[lt]	35	35	35	35
rezervoar za deterdžent - *cleaning agent tank*	[lt]	3	3	3	3

BIEMMEDUE S.p.A. Via Industria, 12 - 12062 Cherasco (CN) - Italy - T. +39 0172 486111 - F. +39 0172 488270
bm2@biemmedue.com - www.biemmedue.com