BIEMMEDUE
heating, cleaning and drying



TCX & TCXV

INDUSTRIJSKI USISIVAČI VISOKIH PERFORMANSI I ROBUSNOSTI

HIGH PERFORMANCE HEAVY DUTY INDUSTRIAL VACUUM CLEANERS

ECO Steam · Vojvode Putnika 43, Trnava, 35000 Jagodina · tel. +381 63 640 101 · info@eco-steam.rs · www.eco-steam.rs

TCX & TCXV - INDUSTRIJSKI USISIVAČI VISOKIH PERFORMANSI I ROBUSNOSTI

- Robusni i izdržljivi
- Otporni na najteže radne uslove
- Izuzetno svestrani: mogu se koristiti sa svim tipovima filtera od L do H (uključujući HEPA filtere)
- Širok opseg snage od 3hp do 7,5hp
- Modeli sa dvostepenim turbinama povezanim paralelno obezbeđuju veći protok vazduha za brzo uklanjanje velikih količina prašine, dok modeli sa dvostepenim turbinama povezanim serijski obezbeđuju veće usisavanje na velikim udaljenostima za prikupljanje otpada, tečnosti, ulja i teških čestica
- Više jedinica može se povezati serijski ili paralelno i formirati mrežu usisnih sistema koja uklanja čestice prašine sa radnih površina u fabrikama i radionicama

- Sve jedinice imaju filter zvezdastog oblika koji obezbeđuje veliku filtersku površinu i efikasan mehanizam za čišćenje filtera. Alternativno, na zahtev su dostupni potpuno automatski sistemi za čišćenje filtera sa programabilnim tajmerima

- Širok asortiman opreme i filtera omogućava usisavanje svih vrsta prašine, tečnosti i ulja (samo ako su električno provodljivi)
- Odlični za gradilišta, čišćenje automobila, mehaničarske radionice, drvoprerađivačke fabrike i sve industrijske fabrike i radionice

- *Extremely robust and durable construction*
- *Withstands the harshest working environments*
- *Versatility of function: can be used with ALL types of filters from L to H (including HEPA filters)*
- *Large range of powers from 3 hp to 20 hp*
- *Models with two-stage turbines connected in parallel, provide superior air flow for fast removal of huge quantities of dust, whereas models with two-stage turbines connected serially, provide extra vacuum power for the collection of waste material, liquids, oils, and heavier particles over longer distances*
- *Several units can be installed in series or parallel to provide a network vacuum systems to eliminate dust and waste particles from the work surfaces of factories and work shops*
- *All units are equipped with a star-shaped filter providing a large filtration surface area and an efficient filter shaking mechanism. Alternatively fully automatic filter cleaning systems with programmable timers are available on demand*
- *The vast assortment of accessories and filters adapt the machines for use in the removal of any type of dust and/or liquid, even oil separation (only if electrically conductive)*
- *Excellent for construction sites, car detailing and cleaning, mechanics' workshops, wood working factories, and basically all factories and industrial workshops and warehouses*

TCXV *TCX*










SERIJSKA OPREMA / *SUPPLIED ACCESSORIES*

	ŠIFRA	OPIS - *DESCRIPTION*
	004.204	Zvezdasti filter, velika filterska površina, noseći prsten *Star-shaped filter with large filtration surface area with support ring*

DODATNA OPREMA NA ZAHTEV / *ACCESSORIES ON DEMAND*

	KOMPLET	OPIS - *DESCRIPTION*
	004.299.007	Standardni komplet Ø 40 mm (EVA crevo) *Standard kit Ø 40 mm (EVA hose)* (004.399.020**(1)** + 004.024**(2)** + 004.421**(3)**)
	004.299.006	Standardni komplet Ø 50 mm (EVA crevo) *Standard kit Ø 50 mm (EVA hose)* (004.295**(1)** + 004.024**(2)** + 004.299.002**(3)**)
	004.299.008	Antistatički komplet / otporan na ulje Ø 40 mm (EVA crevo) *Antistatic/Oil proof kit Ø 40 mm (EVA hose)* (004.399.022**(1)** + 004.024**(2)** + 004.095**(3)**)
	004.299.004	Antistatički komplet / otporan na ulje Ø 50 mm (EVA crevo) *Antistatic/Oil proof kit Ø 50 mm (EVA hose)* (004.297**(1)** + 004.024**(2)** + 004.095**(3)**)
	004.299.009	Calor komplet Ø 40 mm (PUR CALOR/antiabrazivno crevo) *Calor kit Ø 40 mm (PUR CALOR/ANTIABRASIVE hose)* (004.299.012**(1)** + 004.024**(2)** + 004.095**(3)**)
	004.299.005	Calor komplet Ø 50 mm (PUR CALOR/antiabrazivno crevo) *Calor kit Ø 50 mm (PUR CALOR/ANTIABRASIVE hose)* (004.299**(1)** + 004.024**(2)** + 004.095**(3)**)

DODATNA OPREMA NA ZAHTEV I FILTERI, VIDI STR. 208
ACCESSORIES ON DEMAND AND FILTER SEE PAG. 208







POSEBNE APLIKACIJE (APPS)

ZA INDUSTRIJSKE USISIVAČE DOSTUPNO (VIDI STR. 210)


SPECIAL APPLICATION SYSTEMS (APPS)

FOR INDUSTRIAL VACUUM CLEANERS AVAILABLE (SEE PAG.210)



PAŽNJA: posebne aplikacije realizuju se isključivo tokom izrade mašine.
PLEASE NOTE: apps are exclusively implemented during the construction of the vacuum cleaner.

TCX & TCXV - INDUSTRIJSKI USISIVAČI VISOKIH PERFORMANSI I ROBUSNOSTI
HIGH PERFORMANCE HEAVY DUTY INDUSTRIAL VACUUM

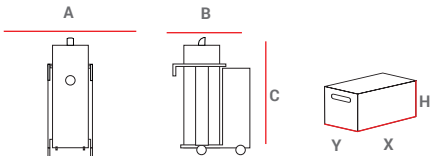

TEŽINA I DIMENZIJE MAŠINE *WEIGHTS AND DIMENSIONS MACHINE*					PAKOVANJE *PACKAGING*			
MOD	A	B	C	Neto/*Net*	X	Y	H	Bruto/*Gross*
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
TCX 75 P - TCXV 75 P	680	1.210	1.450	142,5	1.260	720	1.670	161,5
TCX 75 S - TCXV 75 S	680	1.210	1.450	166,5	1.260	720	1.670	165,5

		TCX 75 P	TCX 75 S
šifra - *code*		● 008.002	● 008.001
maks. snaga - *max. power*	[W] [HP]	5.500 W 7,5 HP	5.500 W 7,5 HP
napajanje - *power supply*	[V-ph-Hz]	400-3-50	400-3-50
tip motora - *motor type*		TR-2st	TR-2st
podpritisak - *water lift*	[mm H_2O]	3.600	5.100
protok vazduha - *air flow*	[m^3/h]	620	400
zapremina rezervoara u litrima - *tank volume in liters*	[l]	100	100
materijal rezervoara - *tank material*		SS 304	SS 304
nivo buke - *noise level*	[dBA]	73	73
filterska površina - *filter surface area*	[cm^2]	21.000	21.000
dužina električnog kabla - *electric cable lenght*	[m]	10	10
prečnik pribora - *diameter of accessories*	[mm]	40/50	40/50
dimenzije palete - *pallet dimensions*	[cm]	80x120x160	80x120x160

TR-2st= 2-stepena turbina - *Double-stage turbine*
SS 304= Nerđajući čelik AISI 304 - *Stainless steel AISI 304*

		TCXV 75 P	TCXV 75 S
šifra - *code*		● 008.029	● 008.030
maks. snaga - *max. power*	[W] [HP]	5.500 W 7,5 HP	5.500 W 7,5 HP
napajanje - *power supply*	[V-ph-Hz]	400-3-50	400-3-50
tip motora - *motor type*		TR-2st	TR-2st
podpritisak - *water lift*	[mm H_2O]	3.600	5.100
protok vazduha - *air flow*	[m^3/h]	620	400
zapremina rezervoara u litrima - *tank volume in liters*	[l]	100	100
materijal rezervoara - *tank material*		AV	AV
nivo buke - *noise level*	[dBA]	73	73
filterska površina - *filter surface area*	[cm^2]	21.000	21.000
dužina električnog kabla - *electric cable lenght*	[m]	10	10
prečnik pribora - *diameter of accessories*	[mm]	40/50	40/50
dimenzije palete - *pallet dimensions*	[cm]	80x120x160	80x120x160

TR-2st= 2-stepena turbina - *Double-stage turbine*
AV= Čelik farban u prahu - *Powder coat painted steel*

BIEMMEDUE S.p.A. Via Industria, 12 - 12062 Cherasco (CN) - Italy - T. +39 0172 486111 - F. +39 0172 488270
bm2@biemmedue.com - www.biemmedue.com