



THERMAL



SVI - ALL



THERMAL X



THERMAL - THERMAL X

INDUSTRIJSKI GENERATOR TOPLE VODE
INDUSTRIAL HOT WATER GENERATOR

THERMAL - THERMAL X- INDUSTRIJSKI GENERATOR TOPLE VODE

INDUSTRIAL HOT WATER HEATER

- Generator tople vode na kolicima, opremljen visokoeфикаsnim kotlom
- Brzo zagreva protoke do 1800 l na sat
- Idealan za kombinovanje sa električnim i benzinskim peraćima pod pritiskom sa hladnom vodom
- Mobile hot water generator equipped with high efficiency boiler
- Rapid heating capability up to 1800 litres per hour.
- Ideally designed to be used in combination with cold water high pressure cleaners


DODATNA OPREMA NA ZAHTEV/ ACCESSORIES ON DEMAND

DOPLATA ZA SPIRALU OD NERĐAJUĆEG ČELIKA PRICE INCREASE FOR STAINLESS STEEL HEATING COIL	MOTALICA OD NERĐAJUĆEG ČELIKA AISI 304 - L max =30 m STAINLESS STEEL AISI 304 HOSE REEL L max = 30 m	SAMOUSISNA ELEKTROPUMPA PROTOK 1000 L/H SELF PRIMING PUMP - FLOW RATE 1000 L/H
		
Mod. T30 - T30 X Šifra 01AC495	Mod. Svi - All Šifra 01AC467	Šifra 01AC584
Mod. T40 Šifra 01AC496		
ADAPTER ZA ODVOD DIMNIH GASOVA EXHAUST PIPE ADAPTER	DIMOVDNA CEV OD NERĐAJUĆEG ČELIKA STAINLESS STEEL EXHAUST PIPE	KAPA DIMNJAKA OD NERĐAJUĆEG ČELIKA STAINLESS STEEL CHIMNEY POT
		
Šifra 01AC560	Šifra 02AC287 l = 1 m - ø 200 mm	Šifra 02AC284 ø 200 mm

MOD.		DELTA T THERMAL	
		T30-T30 X	T40
lt/min	13	60	76
	15	53	67
	18	45	56
	21	39	49
	30	x	38

NIJE namenjeno za grejanje prostora (Uredba br. 813/2013/EU) – NIJE namenjeno za zagrevanje pitke vode ili sanitarne vode (Uredba br. 814/2013/EU)

NOT designed for space heating (Reg. No 813/2013/EU) – NOT designed for drinking water or sanitary water heating (Reg. No 814/2013/EU)

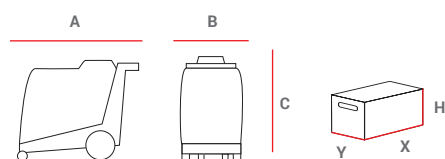

TEŽINA I DIMENZIJE MAŠINE WEIGHTS AND DIMENSIONS MACHINE					PAKOVANJE PACKAGING			
MOD	A	B	C	Neto/Net	X	Y	H	Bruto/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
THERMAL 30	920	620	940	80	1.050	720	1.265	111
THERMAL X 30	920	620	940	82	1.050	720	1.265	113
THERMAL 40	920	620	1.090	108	1.050	720	1.265	134

		T30 X	T30	T40
šifra - code		● 02TH00	● 02TH03	● 02TH02
maks. ulazni pritisak - max. supply pressure	[bar] [MPa - psi]	250 25-3.600	250 25-3.600	250 25-3.600
min. ulazni pritisak - min. supply pressure	[bar] [MPa - psi]	4 0,4-58	4 0,4-58	4 0,4-58
maks. protok - max. flow rate	[lt/h]	1260	1260	1800
min. protok - min. flow rate	[lt/h]	540	540	540
toplotna snaga - rated heat. power	[Kw]	63	63	63
maks. temperatura - max. temperature	[°C]	30-140	30-140	30-140
potrošnja dizel goriva - fuel consumption	[Kg/h]	4,3	4,3	4,3
maks. potrošnja snage - max. absorbed power	[Kw]	0,3	0,3	0,3
napajanje - supply voltage	[V - ph - Hp]	230-1-50	230-1-50	230-1-50
rezervoar za dizel gorivo - fuel tank	[lt]	35	35	35